

Tariff switch, 3-pole, series TAS, setting range 20, 25, 32A


Switchgear with adjustable current limitation, sealable




Technische Daten

Karakteristiek	Tariefomschakelaar
Aantal polen	3
Stroomwarmteverliezen (W)	11,40
Optionele toebehoren	BSA90113--;BSA90114--;BE300050--
Nominale stroomsterkte (A)	32
Product	Tariefschakelaar
Productnormen	EN 60947-2:2006 + A1:2009 + A2:2013 EN 60947-1:2007 + A1:2011 + A2:2014

Schema: Tariff switch, 3-pole, series TAS, setting range 20, 25, 32A

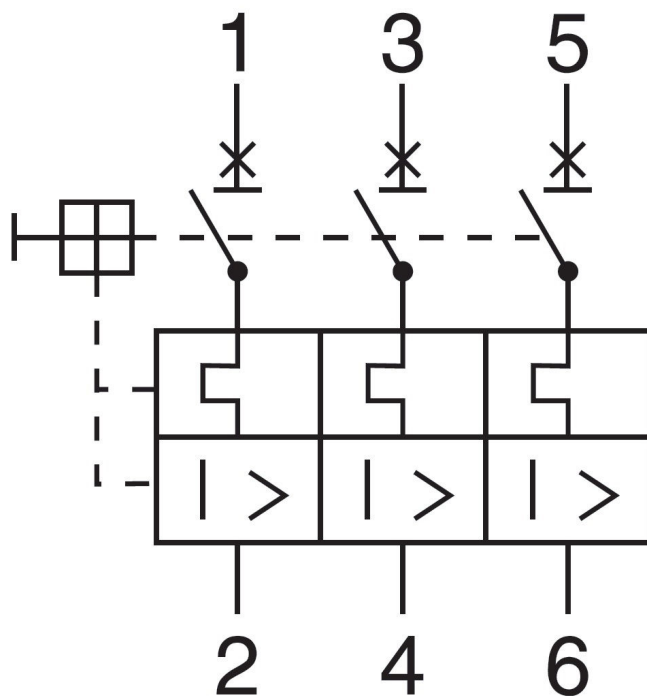

Maattekening: Tariff switch, 3-pole, series TAS, setting range 20, 25, 32A

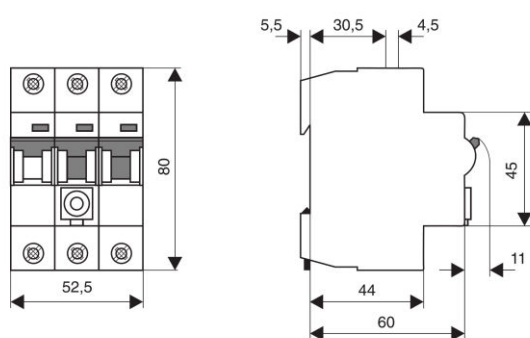

Artikeltabelle

BEZEICHNUNG	KUPFERGEWICHT (kg/km)	BEST.NR.
Tariff switch, 3-pole, series TAS, setting range 20, 25, 32A Switchgear with adjustable current limitation, sealable		BE300069
Optionele toebehoren		
BSA Verdeelrail 3P vorken 10mm ² L1,L2,L3/.. 1m Break-out, shortenable on both sides, TE=17.8mm, suitable for products in the AMPARO and BC, BM and BO series	438	BSA90113
BSA Rail 3P/ 3P vorken uitbreekbaar 16mm ² 80A L1,L2,L3 1m Verdeling: L1,L2,L3/L1,L2,L3/L1,L2,L3	657	BSA90114
Verdeelrail 3P vorken 16mm ² voor hulpcontact l=990mm for Motor Protective devices series BE4 and MCBs with Auxiliary Contact	1491	BE300050