

Datenblatt für Artikel: BK003524--

Wall-mounting distribution board, 4-row - 48MW, without door

IP40, Protectionclass II, 24+4MW, RAL 9003, H=650, W=310, D=96mm



SCHRACK-Info

- Wall-mounted domestic consumer unit enclosures in ABS without doors
- Installation of sheet steel door with door clip possible
- Includes PE and N terminals
- Protection class II
- Halogen free according to RoHS
- Rated voltage 400VAC / In=63A
- Ambient temperature: -25° to +60°C
- Glow wire test: 650°C
- Degree of protection IP40, Impact resistance: IK08
- RAL9003 Signal white



Technische Daten

Breedte (mm)	310,00
Hoogte (mm)	650,00


Technische Daten - Fortsetzung

Diepte (mm)	96,00
Nettogewicht (kg)	2,54
EAN CODE	9004840970272
Stroomwarmteverliezen (W)	-36,00
Omgevingstemperatuur min. (°C)	-25
Omgevingstemperatuur max. (°C)	40
Halogeenvrij	Ja
Productgroep	Opbouw zonder deur
Rijen	4
Aantal modules per rij	12
Beschermingsgraad	IP40
Kleur	RAL 9003

Gegevens tabel: Wall-mounting distribution board, 4-row - 48MW, without door

Artikelnummer	A[mm]	B[mm]	C[mm]	D[mm]	E[mm]	Reihen	TE	N-Klemme[mm²]	PE-Klemme[mm²]	Verlustleistung[W]]*
BK003521										
BK003521										
BK003521										
BK003521										
BK003521										
BK003521										
BK003521										
BK003521										

Maattekening: Wall-mounting distribution board, 4-row - 48MW, without door

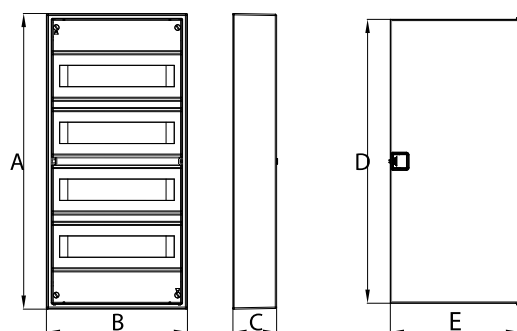

[mm]

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Wall-mounting distribution board, 4-row - 48MW, without door IP40, Protectionclass II, 24+4MW, RAL 9003, H=650, W=310, D=96mm	BK003524
Optionele toebehoren	
Sheet steel door for BK003524, 4-rows	BK003504