


Datenblatt für Artikel: BK0855042K

Media combikast deur metaal, kader en chassis 4HE verticaal

Boven: 2x 12/14MOD; onder: mediadeel (BxHxD) 346x717x45mm IP30 1x stopcontact
RANDAARDE RAL9003 zonder bodem

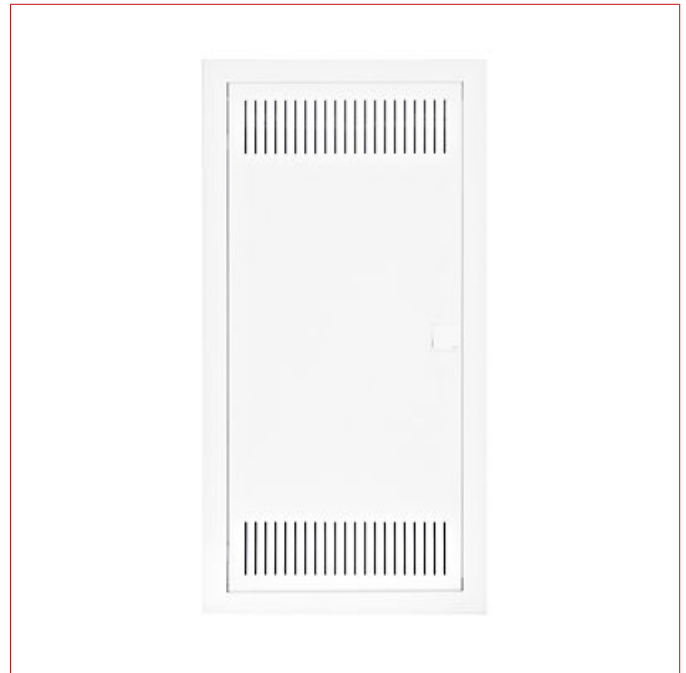

SCHRACK-Info

- Media combi-enclosures for partition wall or solid wall in two versions:
 - **Horizontal 3- to 5-rows** as well as
 - **Vertical 3- to 5-rows**
- **Horizontal designs:**
 - **BK0856032K** : 3x DIN-rails (36+6MW) and 3x mounting plates
 - **BK0856042K** : 4x DIN-rails (48+8MW) and 4x mounting plates
 - **BK0856052K** : 5x DIN-rails (60+10MW) and 5x mounting plates
- For completion, the following articles are necessary:
 - 1x Frame with door and insert (3-, 4- or 5-row)
 - 2x Wall boxes (3-, 4- or 5-row for solid wall or partition wall)
 - 1x Wall box brackets horizontal BK085098-A
- **Vertical designs:**
 - **BK0855032K** : 1x DIN-rail (12+2MW), 2x mounting plates and 1x built-in socket
 - **BK0855042K** : 2x DIN-rails (24+4MW), 2x mounting plates and 1x built-in socket
 - **BK0855053K** : 2x DIN-rails (24+4MW), 3x mounting plates and 1x built-in socket
 - **BK0855052K** : 3x DIN-rails (36+6MW), 2x mounting plates and 1x built-in socket
- For completion, the following articles are necessary:

- 1x Frame with door and insert (3-, 4- or 5-row)
- 1x Wall box (3-, 4- or 5-row for solid wall or partition wall)
- **General information :**
 - WLAN proofed
 - Frames and doors in coated sheet steel, all doors with door clip
 - Horizontal versions: Media door side with ventilation slots
 - Vertical versions: Door with ventilation slots as standard
 - Frame design high (ca. 6 mm)
 - Mounting plates for active and passive components included
 - Glow wire test:
 - Resistant to abnormal heat and fire up to 850 °C for partition wall
 - Resistant to abnormal heat and fire up to 650 °C for solid wall
 - Mounting brackets (included):
 - For partition wall (up to 30 mm wall thickness)
 - For solid wall (Dovetail mounting brackets for front or back panel mounting)
 - Protection class: II
 - Degree of protection: IP30
 - Impact Resistance: IK08
 - Color: RAL9003 (Signal white)



Technische Daten

Breedte (mm)	346,00
Hoogte (mm)	717,00
Diepte (mm)	36,00
Nettogewicht (kg)	3,60
EAN CODE	9004840977783
Stroomwarmteverliezen (W)	-54,00
Omgevingstemperatuur min. (°C)	-25
Omgevingstemperatuur max. (°C)	60
Uitvoering deur	Plaatstaal
Halogeenvrij	Ja
Productgroep	Inbouw met deur
Rijen	2
Aantal modules per rij	12
Beschermingsgraad	IP30
Beschermingsklasse	2
Slagvastheid	IK08
Kleur	RAL 9003

Artikeltabelle

BEZEICHNUNG	NVP (%)	KUPFERGEWICHT (kg/km)	BEST.NR.
Media combikast deur metaal, kader en chassis 4HE verticaal Boven: 2x 12/14MOD; onder: mediadeel (BxHxD) 346x717x45mm IP30 1x stopcontact RANDAARDE RAL9003 zonder bodem			BK0855042K
Noodzakelijke toebehoren			
Inbouwbodem holle wand 4x 12/14MOD RAL9003 wit Prévu pour BK0857, BK0855 (verticaal) ou BK0856 (horizontaal) HxBxD=688x324x87mm			BK0850542A
Inbouwbodem volle muur 4x 12/14MOD RAL9003 wit Prévu pour BK0857, BK0855 (verticaal) ou BK0856 (horizontaal) HxBxD=688x324x87mm			BK0850042A
Optionele toebehoren			
Stopcontactset met randaarde 16A 250VAC Prévu pour BK0857, BK0855 (verticaal) ou BK0856 (horizontaal)			BK085050
Houder datamateriaal mediakasten BK08 Voorzien voor BK0855, BK0856, BK0857, BK0807			BK085094-A
Koppelset verticaal (set= 2stk.) Voor de verticale koppeling van alle inbouwkasten BK085, gemaakt van ABS			BK085095
DIN-Diepteraal dataverdeelkast BK085 Voor plaatsing van toestellen met een grotere montagediepte			BK085099
Halfcilinderslot in metaal sleutel 2233X voor kast BK085.			BK085097
Sleutel 2233X			BK085093
Vervangonderdelen kader en deur			BK085090
Vervangonderdelen inbouwbodem			BK085091
TOOLLESS LINE Adapter DIN-rail 35mm RJ45 keystone SFA/SFB RAL7035			HSERH010GS
TOOLLESS LINE Keystone RJ45 afgeschermd Cat.6a 10GB (SFA) Beschikbaar per stuk			HSEMRJ6GWA
Kabel S/FTP Cat.7 4x2xAWG23/1 1000MHz LS0H-3 Cca 50% blauw Op dit artikel is een kopertoeslag van toepassing, deze wordt zichtbaar door op het info-icoon te klikken. Cca-s1a,d1,a1 blauw	79	28	HSEKP423CB
Single built-in socket for series Gemini enclosures vertical			BK085049