

Datenblatt für Artikel: DSS428020B

DSS Serverkast <1800kg 42HE BxD 800x1200mm IP20 RAL9005

HxBxD 1970x800x1200mm zwart



SCHRACK-Info


- Welded powder-coated sheet steel skeleton 2,0 mm
- Height: 42U
- Width: 800mm
- Other dimensions and Datacenter-version with flat roof for cold-aisle are available upon request.
- Depth: 1.200 mm
- Colour: RAL9005 Black
- Maximum static load: 1.800 kg
- Degree of protection: IP20
- IP54 version with Front Glas-door and rearpanel full-metal available upon request.
- Frontdoor full width, Perforated 80% Permeability with handsome swing handle. Prepared for half-cylinder type locks. Halfcylinder lock (Ordernumber: DV900333), Depth= 40mm, Diameter= 17mm, Fixing= M5 Screw, optional available.
- Doors hinged right. Can be changed to hinging on left.
- Frontdoor can be replaced by optional DSRT doors (Glas, Full metal or Perforated, Full width or Double-wing).
- Removeable and lockable side-panels. Key included.
- Reardoor Double-wing, Perforated 80% Permeability with handsome swing handle. Reardoor can be replaced by optional DSRT doors (Glas, Full metal or Perforated, Full width or Double-wing).
- Heavy-Duty base optional: Height = 120 mm
- 19" rails (4 pcs.) galvanised, continuously depthadjustable. Numbering if Height-Units (U) by laser for easy readability.

- In 800 mm wide DSS enclosures, you can choose to adjust the 19" rails to a width of 21".
- In 1.000 and 1.200mm deep DS enclosures, there is an additional pair of vertical rails installed in half depth. This makes installation of high depth accessories together with standard accessories possible at the same time.
- Space between front vertical 19"-rail and door glass at max. spacing:
 - W600 – 30 mm
 - W800 – 50 mm
- Space between rear vertical 19"-rail and rear panel at max. spacing:
 - W600 – 30 mm
 - W800 – 55 mm
- Maximum distance between vertical rails (19"-rails) in free-standing cabinets:
 - W600 x D800 – 730 mm
 - W600 x D1000 – 930 mm
 - W800 x D800 – 670 mm
 - W800 x D1000 – 870 mm
 - W800 x D1200 – 1070 mm
- Maximum usable depth in free-standing cabinets when installed e.g. on shelves:
 - D800 – 775 mm
 - D1000 – 975 mm
 - D1200 – 1175 mm
- Spacing between vertical 19"-rails: 451 mm
- Roof construction with opening, 19" punched. Flexible covered by removable plates of different heights to allow installation of fan-units and cable-entry panels. Remaining opening can be closed by use of one these plates.
 - D800 - Opening: 10 U, Covering: 2 x 4 U and 1 x 2 U
 - D1000 - Opening: 12 U, Covering: 2 x 4 U and 2 x 2 U
 - D1200 - Opening: 12 U, Covering: 2 x 4 U and 2 x 2 U
- Floor construction with opening, 19" punched. Covered by removable plate in full height.
 - D800 - Opening: 10 U, Covering: 1 x 10 U
 - D1000 - Opening: 12 U, Covering: 1 x 12 U
 - D1200 - Opening: 12 U, Covering: 1 x 12 U
- Roof unit assemblies can also be fitted to floor section. Standard base required.
- Cable entry possible via roof, base and rear panel. Delivered with demountable or break-out blanking plates.
- Brush strip panel for roof (DBK24800) optional.
- Air vents for passive ventilation
- Earthing:
 - M8-Earthing point plus 19"-Earthingset in the rear of the cabinet
 - FastOn-Earthing-connections to all dismountable parts pre-installed
- Included assembly materials:
 - 16 x Cage nuts, bolts and washers M6
 - 4 x Levelling feet
 - 1 x Brush
 - 1 x Edge Protection for cable-entry
- Wide range of available accessories (fan-units, cable entry panels, fixed shelves, patch panels, cable management, PDUs, doors, etc.).
- Enclosure is delivered completely assembled on a disposable pallet.

Technische Daten

Breedte (mm)	800,00
Hoogte (mm)	1.970,00
Diepte (mm)	1.200,00
Nettogewicht (kg)	163,00
Omgevingstemperatuur min. (°C)	0
Omgevingstemperatuur max. (°C)	40
Hoogte eenheden	42HE 1970mm
Kleur	RAL 9005

Maattekening: DSS Serverkast < 1800kg 42HE BxD 800x1200mm IP20 RAL9005

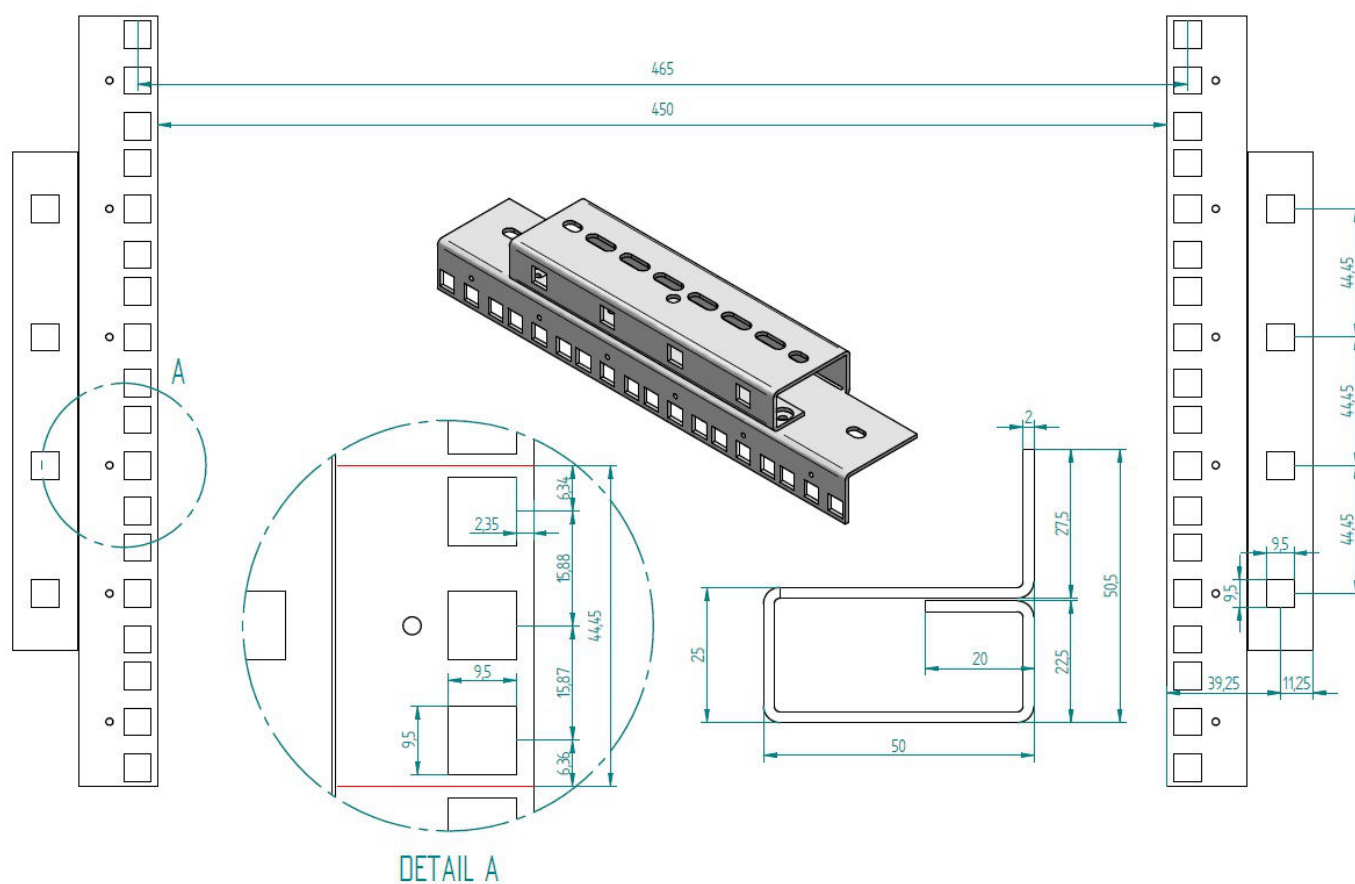

Artikeltabelle

BEZEICHNUNG	BEST.NR.
DSS Serverkast <1800kg 42HE BxD 800x1200mm IP20 RAL9005 HxBxD 1970x800x1200mm zwart	DSS428020B
Optionele toebehoren	
Profielhalfcilinder 40mm 333/ 5333 1 sleutel en schroef M5 Schroef voor plaatsing inbegrepen in de levering	DV900333S
Paneel borstel invoer montage in dak 2HE RAL9005 zwart	DBK24800-B
DS Plaat 19" 2 ventilatoren en thermostaat 4HE RAL9005 zwart Voor kasten DS, DSS en DSZ	DLT44802-B
DSS Sokkel dieptedelen 2stk. D=1200mm RAL9005 Delen met hoeken, RAL9005 zwart	DSSOT1220B
DS Sokkelplaat breedte geperforeerd filter B=800mm RAL9005 Standschrank, RAL9005 Black	DSOF1283-B
S-Rack Paneel 19" 1HE kabelgeleiding 5 ringen 63mm zwart Ring metaal 63mm, bevestigingsmateriaal bij levering inbegrepen	DTBC105R-B
Paneel 19" 5 ringen metaal 80x40mm 1HE RAL9005 zwart	DBC14805-B
Paneel 19" 5 ringen kunststof 40x83mm 1HE RAL9005 zwart	DBK14805-B
Legbord 19" vast D=450mm <80kg 1HE RAL9005 zwart	DFS14845-T
Stopcontactenbalk 19" 9x RANDAARDE 1HE kabel 3m STOPCONTACTEN MET RANDAARDE ZIJN NIET TOEGELATEN IN BELGIE	IU070114-3
Stopcontactenbalk 19" 7x RANDAARDE OSA 1,25HE PVC STOPCONTACTEN MET RANDAARDE ZIJN NIET TOEGELATEN IN BELGIE	IU070113
Stopcontactenbalk 19" 9x RANDAARDE 1HE schakelaar STOPCONTACTEN MET RANDAARDE ZIJN NIET TOEGELATEN IN BELGIE	Q7070114-A
Stopcontactenbalk 19" 7x RANDAARDE 1HE OSA STOPCONTACTEN MET RANDAARDE ZIJN NIET TOEGELATEN IN BELGIE	Q7070113-A
IT METER LINE PDU Passive, IN:CEE 16A Red, OUT: 12xC13, 6xShuko	HSMPP312
IT METER LINE PDU, Power Metering, 36xC13, 6xC19, Eth, Sensoropt.	HSMPP336
DSS/ DST Bevestigingen stopcontactbalk 19" B=600mm/800mm 1HE Set van 2 hoeken met bevestigingsmateriaal, montage op buitenzijde 19" profiel of op kastframe	DSSPDU010
DSS Bevestigingen stopcontactbalken kast B=600mm/800mm 2HE Set van 2 hoeken met bevestigingsmateriaal, montage op kastframe	DSSPDU021
DSS Bevestigingen stopcontactbalken kast B=600mm/800mm 2HE Set van 2 hoeken met bevestigingsmateriaal, montage op kastframe	DSSPDU022
Bevestigingset 19" M6 50x moer/ schroef/ rondel	DSSRA050
S-Rack Montageplaat 19" 14HE geperforeerd Bevestigingsmateriaal inbegrepen in de levering	DMP1914
LED datakastverlichting magnetisch, 230VAC, Deurschakelaar automatisch in werking zodra de deur wordt geopend, externe voedingseenheid	DTLIGHT01

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Optionele toebehoren	
Switch 24xRJ45 10/100/1000, Silent, w/o fan, internal PSU	QLGSW2457
Metal-Chassis, 19"	
TOOLLESS LINE Patchpaneel 19" 24MOD (SFA/B) 1HE RAL9005	HSER0240SP