

Datenblatt für Artikel: DTWH096045

S-RACK Netwerkkast 19" 9HE HxBxD 512x600x450mm RAL9005

Netzwerk wandkast zwart



SCHRACK-Info

Mainly used in offices and office-like environments, such as flats, single-family homes, etc. Suitable as a central distributor in small to medium-sized network installations, but also for use as a floor distributor (sub-distributor) in the horizontal area of structured cabling. The removable side panels allow convenient access to the installed components, even afterwards. For active cooling of the built-in components, optional DTLT fan units with one or two fans can be mounted in the roof


- **Material:** Powder-coated steel sheet housing
- **Material thickness:**
 - Top and bottom chassis: 0.6mm
 - Corner profile: 1.1mm
 - Rails: 1.4mm
 - Front door: 0,6mm
 - Rear panel: 0.5mm
 - Side panel: 0.5mm
- **Colors:**
 - RAL9005 Black
 - Strips: RAL5005 Signal blue
- **Height:** 9U
- **Width:** 600mm
- **Depth:** 450mm

- **Maximum load:** With even distribution: 80kg
- **Degree of protection:** IP20
- **Doors:** Glass door of safety glass 4mm including lock and 2 keys. Door hinged on the right. Conversion to left hinged possible. Opening angle of the door: approx. 230°.
- **Side panels:** Removable and lockable. The side panels are also fitted with a plastic dummy at the locking point of the barrel in the center. Optional accessory kit with 2 cylinders (O-shape/quarter-turn with cam lock) can be installed to provide more security.
- **Rails:** D= 450mm have 2x front 19" rails, galvanised, depth-adjustable, U marking present. A second pair of 19" DTWGPROFxx rails for rear mounting is available as an option. This is required for 4-point mounting of heavy installations.
- **Cable entry options:** In roof, floor and rear wall.
 - The floor, roof and rear panel are provided with a break-out blank cover.
- **Cooling:**
 - Passive cooling through ventilation slots and heat exchange with the outside area.
 - Active cooling by optional DTLT fans, which are easily and quickly inserted into the roof from the outside. This can also be easily done out afterwards.
- **Earthing:** Earthing set is included
- **Accessories:** Numerous accessories available (shelves, PDUs, cable management, blank panels, fan units, etc.)
- **Delivery:** Enclosure is completely assembled and delivered with assembly material


Technische Daten

Breedte (mm)	600,00
Hoogte (mm)	512,00
Diepte (mm)	450,00
Nettogewicht (kg)	13,50
EAN CODE	9004840990898
Omgevingstemperatuur min. (°C)	5
Omgevingstemperatuur max. (°C)	40
Hoogte eenheden	9
Kleur	RAL 9005
Beschermingsgraad	IP20
Maximale belasting (bij gelijkmatige verdeling) (kg)	80
Productgamma	S-RACK


**Maattekening: S-RACK Netwerkkast 19" 9HE HxBxD 512x600x450mm
RAL9005**

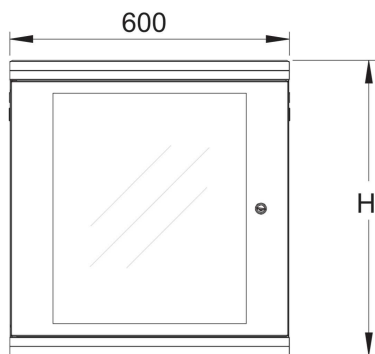


Front view

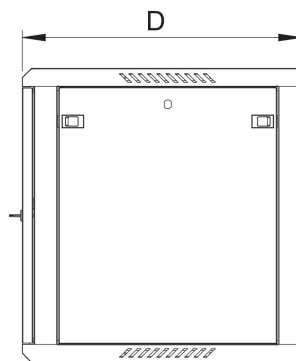


Side view




Bottom view




Top view

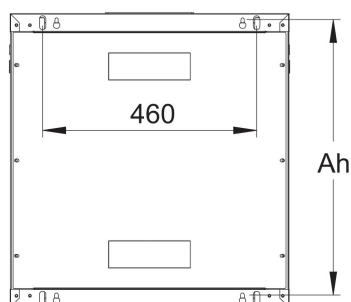


Rear view



Front inside view



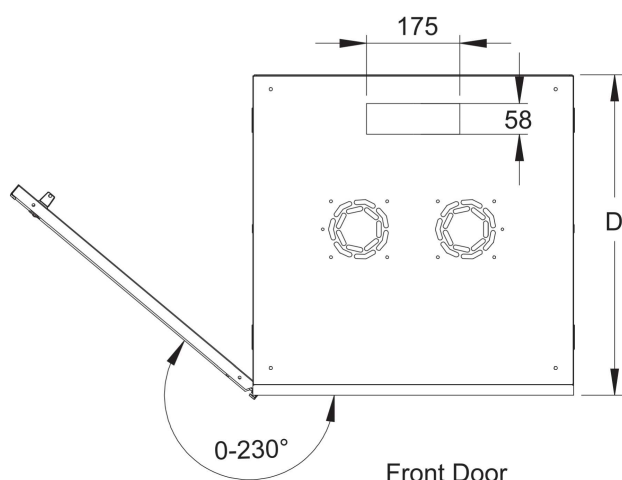


Front Door
Opening Angle

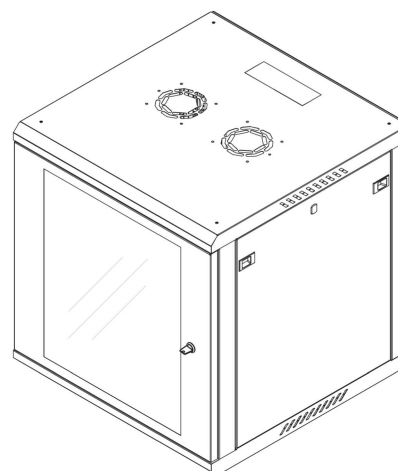

Isometric view


Maattekening: S-RACK Netwerkkast 19" 9HE HxBxD 512x600x450mm RAL9005

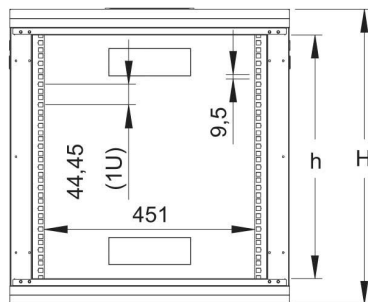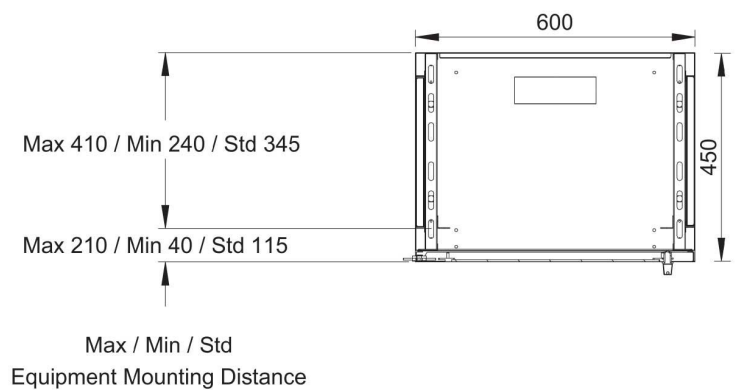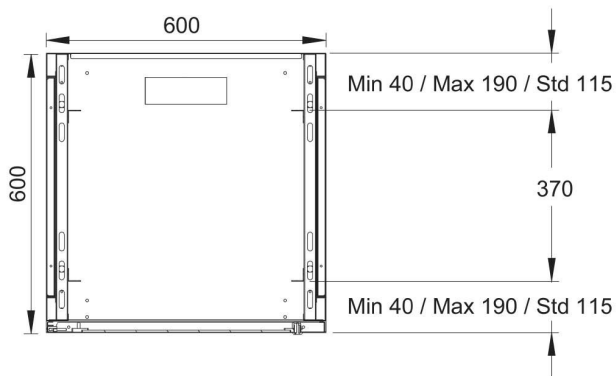

Dimensions in
Width and Height

U Height	Size D	h	H	Ah
4U	450/600	178	290	251
6U	450/600	267	379	340
9U	450/600	400	512	473
12U	450/600	533	645	606
15U	450/600	667	779	740
18U	450/600	800	912	873

Maattekening: S-RACK Netwerkkast 19" 9HE HxBxD 512x600x450mm RAL9005

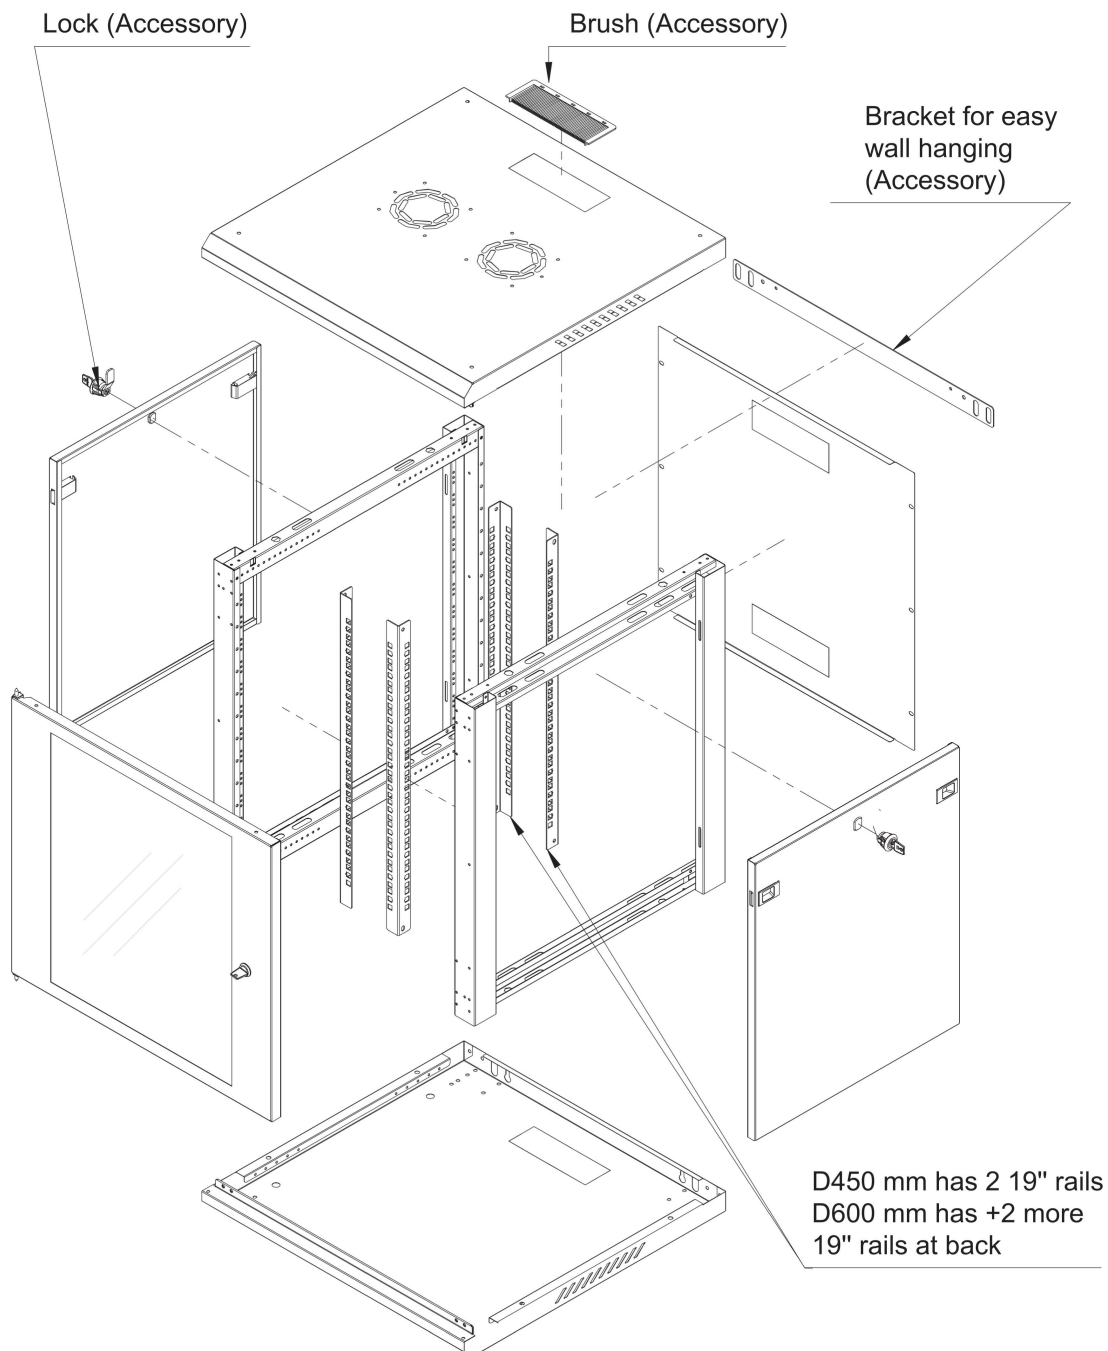

Artikeltabelle

BEZEICHNUNG	BEST.NR.
S-RACK Netwerkkast 19" 9HE HxBxD 512x600x450mm RAL9005 Netwerk wandkast zwart	DTWH096045
Optionele toebehoren	
S-Rack Dakplaat 2 ventilatoren thermostaat analoog RAL9005 Met analoge thermostaat zwart	DTLRO2A-B
S-Rack Dakplaat 1 ventilator thermostaat analoog RAL9005 Met analoge thermostaat zwart	DTLRO1A-B
DTWG/H Profielen verticaal 19" set 2 stuks 9HE Verpakkingseenheid 2stk.	DTWGPROF09
S-Rack Legbord 19" vast D=300mm 1HE <30kg RAL9005 zwart Bevestiging op 2 punten, laag profiel	DTFT1300-B
DTWG/DTWH Set 4 wielen wandkast (2x met, 2x zonder rem) DTWH, max. Load = 80kg	DTZR0006
S-Rack Standaard slot en sleutel rug- en zijpanelen 2stuks Vervanging voor staande kasten DTWG en DTWH	DTZLOCK06
DTWG/H Wandbevestiging RAL9005 2x coated pressed-in nuts, RAL9005 Black	DTZBRACK-B
S-Rack Dakplaat met borstelinvloer 60x176mm RAL7035 Voor DTWG en DTWH	DTZBRUSH04
TOOLLESS LINE Patchpaneel 19" 24MOD (SFA/B) 1HE RAL9005	HSER0240SP
S-Rack Paneel 19" 1HE kabelgeleiding 5 ringen 63mm zwart Ring en metaal 63mm, bevestigingsmateriaal bij levering inbegrepen	DTBC105R-B
Bevestigingset 19" M6 20x moer/ schroef/ rondel	DTSRA020
Switch 24xRJ45 10/100/1000, Silent, w/o fan, internal PSU Metal-Chassis, 19"	QLGSW2457
Stopcontactenbalk 19" 9x RANDAARDE 1HE kabel 2m STOPCONTACTEN MET RANDAARDE ZIJN NIET TOEGELATEN IN BELGIE	IU070114
Stopcontactenbalk 19" 7x RANDAARDE OSA 1,25HE PVC STOPCONTACTEN MET RANDAARDE ZIJN NIET TOEGELATEN IN BELGIE	IU070113
Stopcontactenbalk 19" 9x RANDAARDE 1HE schakelaar STOPCONTACTEN MET RANDAARDE ZIJN NIET TOEGELATEN IN BELGIE	Q7070114-A
Stopcontactenbalk 19" 7x RANDAARDE 1HE OSA STOPCONTACTEN MET RANDAARDE ZIJN NIET TOEGELATEN IN BELGIE	Q7070113-A