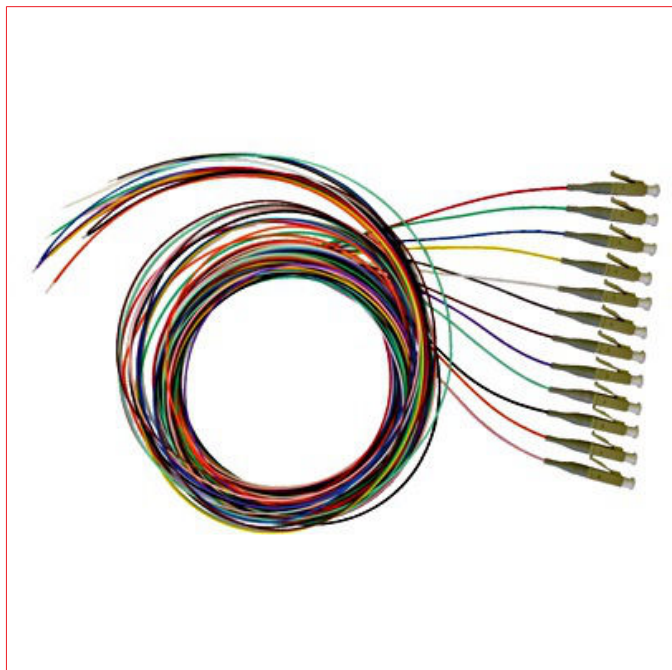


Datenblatt für Artikel: HLP03T002V

FO Pigtail ST 50/ 125µm OM3 2m 12stk. PREMIUM klasse B

**OM3**

Technische Daten

Breedte (mm)	120,00
Hoogte (mm)	15,00
Nettogewicht (kg)	0,12
Productgamma	Pigtails
Variante	Set 12 stuks
Maximale ontmantellengte (mm)	1000
Omgevingstemperatuur min. (°C)	-20
Omgevingstemperatuur max. (°C)	70
Insertion loss typical (dB)	0,12
Return loss typical (dB)	≥ 35
Vezels (µm)	50/125µm OM3 multimode
Primaire coating (µm)	250
Secundaire coating (µm)	900µm
Geleiderkleur (Set van 12) / IEC 60304	rood, groen, geel, wit, grijs, bruin, paars, turquoise, zwart, oranje, roze
Norm glasvezel	IEC 60793-2-10

Technische Daten - Fortsetzung

Type Connector	ST
Connectorkleur	metaal
Diameter adereindhulzen (mm)	2,5
Steekcycli	500
Connector standaard	IEC 61754-2
Treksterkte (N)	5
Normering	IEC 61753-1

Artikeltabelle

BEZEICHNUNG	BEST.NR.
FO Pigtail ST 50/125µm OM3 2m 12stk. PREMIUM klasse B	HLP03T002V