



Datenblatt für Artikel: HLP23LT03F

FO Patchkabel Duplex LC/ST 50/ 125µm OM3 LSOH-3 aqua 3m

LSOH, aqua

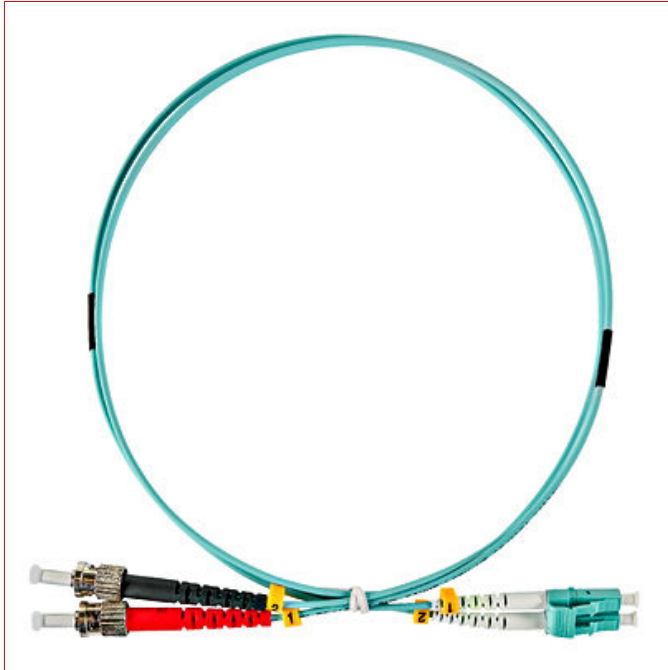

SCHRACK-Info

Multimode patch cords are mainly used for short-distance communication with high transmission rates, for example within a building or on a campus. The multimode patch cords are equipped with an LSOH-jacket. These comply with IEC or EIA-TIA standards. These multimode enhanced patch cords are terminated with optimized connectors which give optimum optical performance.

FEATURES

- LC/UPC - ST/UPC connectors
- Low smoke zero halogen (LSOH) jacket
- 900 µm tight buffer
- Multimode cabled fiber conforms to ITU-T G.651.1, IEC 60793-2-10
- Duplex
- REACH, RoHS and SvHC materials compliant

APPLICATIONS

- CATV / Video
- Passive Optical Network PON
- WDM / DWDM
- FTTH
- Data centers
- Supports high speed multi channel video, data and voice services in metropolitan and access networks


- ATM, SONET and WDM



Technische Daten

Productnormen	IEC 61300-3-4 / IEC 61300-3-6
Connector standaard	IEC 61754
FO aansluitingen	LC/ST
Lengte patchsnoer (m)	3
Type vezels	50/125µm OM3 multimode
Kabelmantel	LS0H
Kleur	Aqua
Insertion loss typical (dB)	≤0,25
Return loss typical (dB)	≥30
Omgevingstemperatuur min. (°C)	-20
Omgevingstemperatuur max. (°C)	60
Breedte (mm)	210,00
Hoogte (mm)	320,00
Nettogewicht (kg)	0,14

Maattekening: FO Patchkabel Duplex LC/ST 50/ 125µm OM3 LS0H-3 aqua 3m

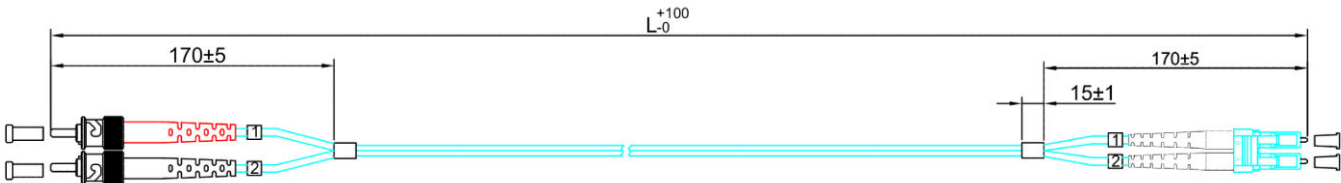

BEZEICHNUNG	BEST.NR.
FO Patchkabel Duplex LC/ST 50/125µm OM3 LS0H-3 aqua 3m LS0H, aqua	HLP23LT03F