



Datenblatt für Artikel: HLP29LL03F

FO Patchkabel Duplex LC/LC 9/ 125µm OS2 LSOH-3 geel 3m

LSOH, yellow

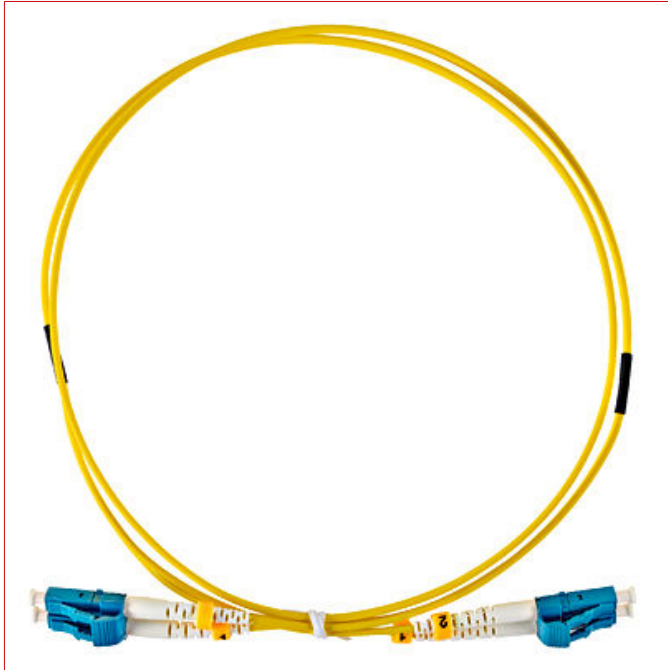

SCHRACK-Info

Single mode patch cords are used for telecom networks and also used for high speed metropolitan and access network. The single-mode patch cables are equipped with an LSOH jacket. These comply with IEC or EIA-TIA standards. These singlemode enhanced patch cords are terminated with optimized connectors which give optimum optical performance.

FEATURES

- LC/UPC - LC/UPC connectors
- Low smoke zero halogen (LSOH) jacket
- 900 µm tight buffer
- Singlemode cabled fiber conforms to ITU-T G.657.A2, IEC 60793-2-50
- Duplex
- REACH, RoHS and SvHC materials compliant

APPLICATIONS

- CATV / Video
- Passive Optical Network PON
- WDM / DWDM
- FTTH
- Data centers
- Supports high speed multi channel video, data and voice services in metropolitan and access networks


- ATM, SONET and WDM



Technische Daten

Productnormen	IEC 61300-3-4 / IEC 61300-3-6
Connector standaard	IEC 61754
FO aansluitingen	LC/LC
Type Connector	LC Hulsdiameter 1,25mm
Lengte patchsnoer (m)	3,0
Type vezels	9/125µm OS2 singlemode
Kabelmantel	LS0H
Kleur	Geel
Diameter (mm)	2 x 2,2
Insertion loss typical (dB)	≤0,25
Return loss typical (dB)	≥50
Omgevingstemperatuur min. (°C)	-20
Omgevingstemperatuur max. (°C)	60
Breedte (mm)	200,00
Hoogte (mm)	300,00
Nettogewicht (kg)	0,11

Maattekening: FO Patchkabel Duplex LC/LC 9/125µm OS2 LS0H-3 geel 3m

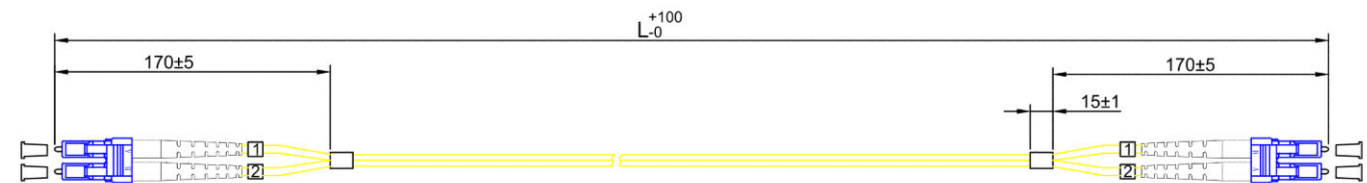

BEZEICHNUNG	BEST.NR.
FO Patchkabel Duplex LC/LC 9/125µm OS2 LS0H-3 geel 3m LS0H, yellow	HLP29LL03F