


Datenblatt für Artikel: HLP2SLL10F

FO Kabel Duplex LC/UPC-LC/UPC 50/ 125µm OM5 LSOH-3 GN 10m

LSOH, lime green



Schrack-Info

Multimode patch cords are mainly used for short-distance communication with high transmission rates, for example within a building or on a campus. The multimode patch cords are equipped with an LSOH-jacket. These comply with IEC or EIA-TIA standards. These multimode enhanced patch cords are terminated with optimized connectors which give optimum optical performance.

FEATURES

- LC/UPC - LC/UPC connectors
- Low smoke zero halogen (LSOH) jacket
- 900 µm tight buffer
- Multimode cabled fiber conforms to ITU-T G.651.1, IEC 60793-2-10
- Duplex
- REACH, RoHS and SvHC materials compliant

APPLICATIONS

- CATV / Video
- Passive Optical Network PON
- WDM / DWDM
- FTTH
- Data centers
- Supports high speed multi channel video, data and voice services in metropolitan and access networks


- ATM, SONET and WDM



Technische Daten

Breedte (mm)	300,00
Hoogte (mm)	350,00
Nettogewicht (kg)	0,53
Productnormen	IEC 61300-3-4 / IEC 61300-3-6
Connector standaard	IEC 61754
FO aansluitingen	LC/LC
Lengte patchsnoer (m)	10
Type vezels	50/125µm OM5 multimode
Kabelmantel	LS0H
Kleur	Limoengroen
Insertion loss typical (dB)	≤0,25
Return loss typical (dB)	≥30
Omgevingstemperatuur min. (°C)	-20
Omgevingstemperatuur max. (°C)	60

Maattekening: FO Kabel Duplex LC/UPC-LC/UPC 50/ 125µm OM5 LS0H-3 GN 10m

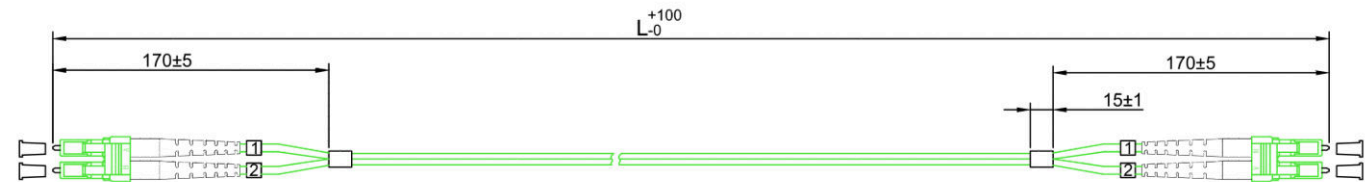

BEZEICHNUNG	BEST.NR.
FO Kabel Duplex LC/UPC-LC/UPC 50/125µm OM5 LS0H-3 GN 10m LS0H, lime green	HLP2SLL10F