

Datenblatt für Artikel: HSATG442M-

SAT Behuizing staal geperf. montageplaat W400xH400xD200

RAL7035



SCHRACK-Info

Mounting plate: with 3 mm diameter openings in a 5 x 5 mm grid.

Technische Daten

Breedte (mm)	400,00
Hoogte (mm)	400,00
Diepte (mm)	200,00

Technische Daten - Fortsetzung

Nettogewicht (kg)	6,50
Omgevingstemperatuur min. (°C)	0
Omgevingstemperatuur max. (°C)	40

Gegevens tabel: SAT Behuizing staal geperfd. montageplaat W400xH400xD200

A [mm]

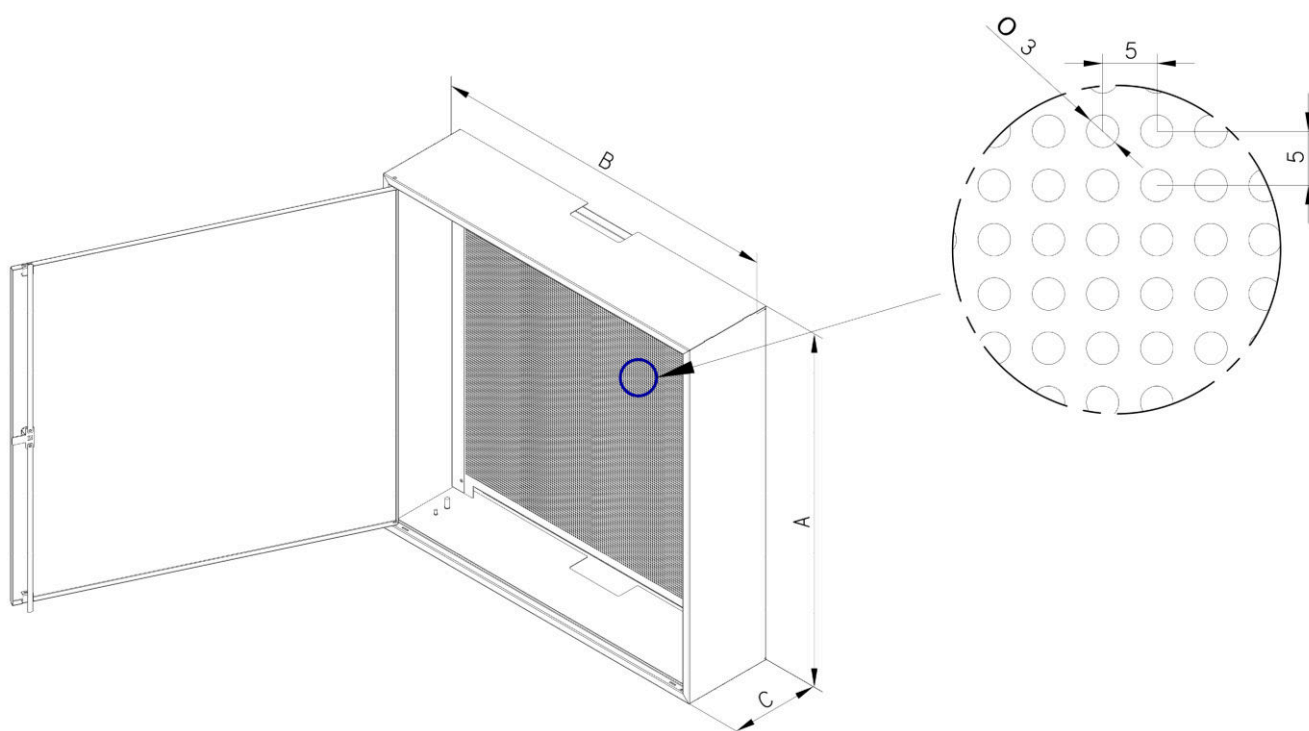
B [mm]

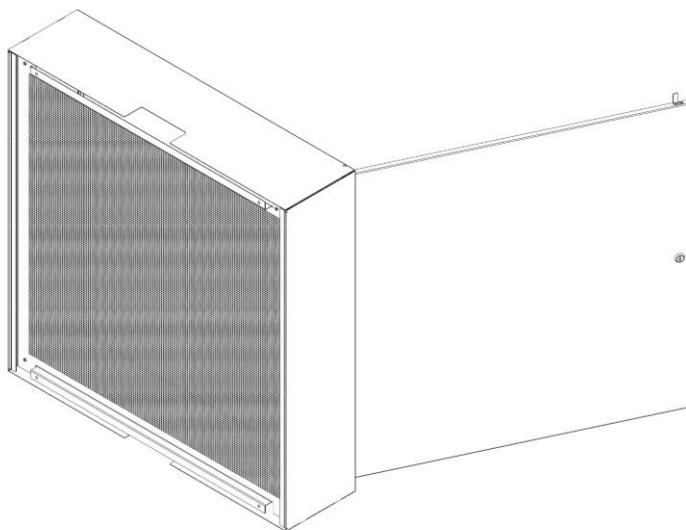
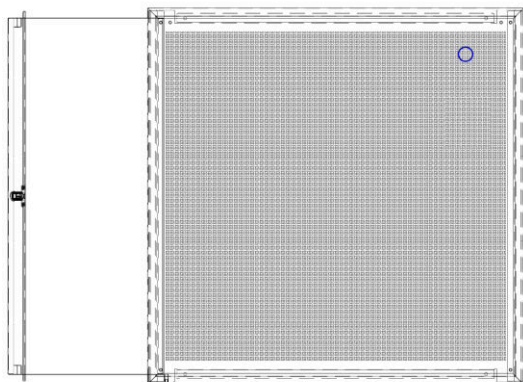
C [mm]

Gewicht netto [kg]

Gewicht bruto [kg]

Maattekening: SAT Behuizing staal geperfd. montageplaat W400xH400xD200



Maattekening: SAT Behuizing staal geperf. montageplaat W400xH400xD200

Artikeltabelle

BEZEICHNUNG	BEST.NR.
SAT Behuizing staal geperf. montageplaat W400xH400xD200 RAL7035	HSATG442M
Optionele toebehoren	
Borstel invoer datakast DW/HSATG 300x70mm zwart	HDZA0003
SAT Multiswitch 5 IN 8 OUT, cascadeable, SPU 58-09N	HSATS508KN
SAT Multiswitch 5 IN 16 OUT, cascadeable, SPU 516-09N	HSATS516KN
SAT Earthing angle with surge protection, 5xF, QEW 5-10N	HSZUEU05AN
SAT Multiswitch 9 IN 12 OUT, cascadeable, SPU 912-09S	HSATS912KS
SAT Earthing angle with surge protection 9xF QEW 9-10	HSZUEU09A
SAT Earthing angle with surge protection, 9xF, QEW 9-10S	HSZUEU09S