


Datenblatt für Artikel: HSELS084LR

FO Splicebox DIN-rail 8x pigtails LC

50/125µm OM4



RAL7035, incl. Pigtails, incl. couplers, CLASSIC

**OM4** **DIN rail**

Technische Daten

Breedte (mm)	126,00
Hoogte (mm)	35,20
Diepte (mm)	155,65
Nettogewicht (kg)	0,59
Type vezels	50/125µm OM4 multimode
Kleur	RAL 7035
Insertion loss typical (dB)	≤0,2
Return loss typical (dB)	≥35
Omgevingstemperatuur min. (°C)	-10
Omgevingstemperatuur max. (°C)	70
Aantal glasvezels	8
Glasvezelaansluiting	LC

Maattekening: FO Splicebox DIN-rail 8x pigtails LC 50/125µm OM4

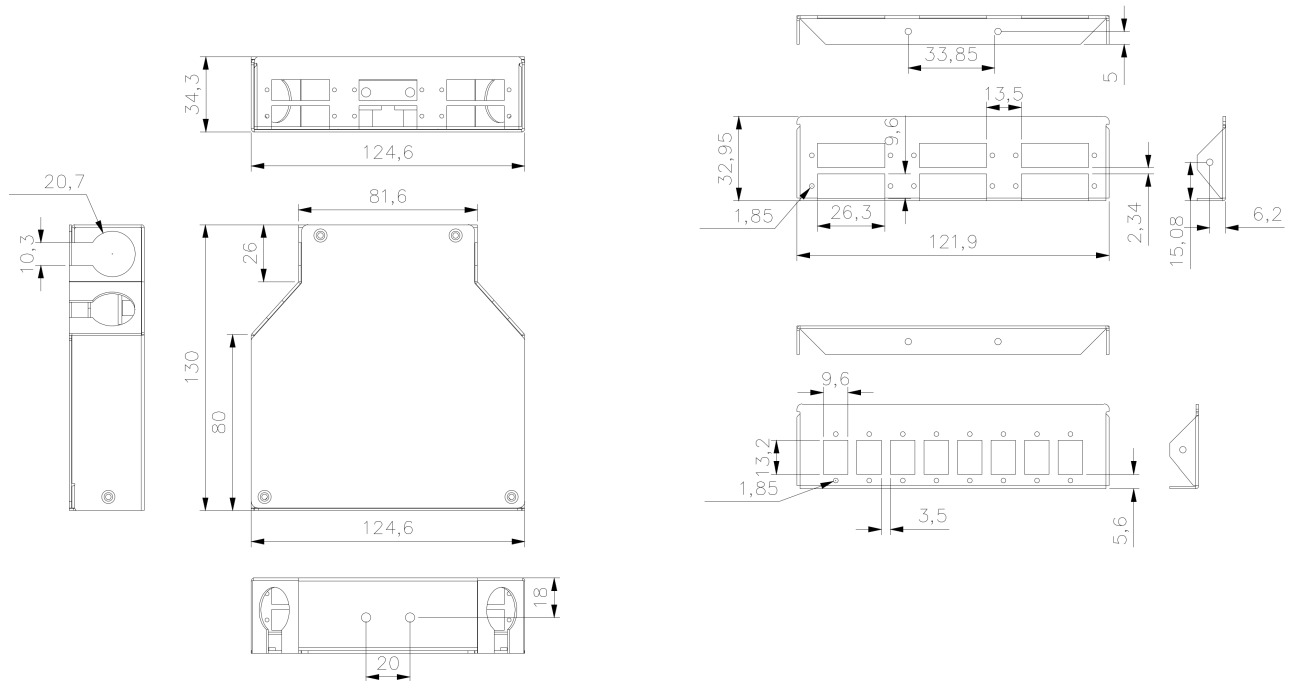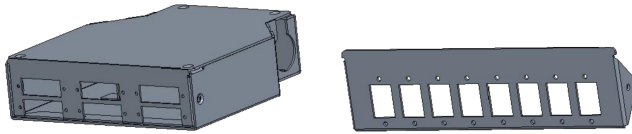

Artikeltabelle

BEZEICHNUNG	BEST.NR.
FO Splicebox DIN-rail 8x pigtails LC 50/125µm OM4 RAL7035, incl. Pigtails, incl. couplers, CLASSIC	HELS084LR
Optionele toebehoren	
FO Splice lasbescherming 60mm (verpakking 10stk.)	HELSP00011
FO Splice lasbescherming 45mm (verpakking 10stk.)	HELSP00010
Glasvezelreinigingsstift LC en MU Suitable for UPC and APC connectors. More than 1,000 cleaning cycles.	HELSZT001
OPM200 Glasvezeltester voor vermogensmeting	HELSZT003
FO Patchkabel Duplex LC/LC 50/125µm OM4 LSOH-3 violet 2m LSOH, heather violet	HLP24LL02F
FO Patchkabel Duplex LC/LC 50/125µm OM4 LSOH-3 violet 5m LSOH, heather violet	HLP24LL05F
FO Patchkabel Duplex LC/SC 50/125µm OM4 LSOH-3 violet 2m LSOH, heather violet	HLP24LC02F
FO Patchkabel Duplex LC/SC 50/125µm OM4 LSOH-3 violet 5m LSOH, heather violet	HLP24LC05F