


Datenblatt für Artikel: HSELS124LR

FO Splicebox DIN-rail 12x pigtails LC

50/125µm OM4



RAL7035, incl. Pigtails, incl. couplers, CLASSIC



Technische Daten

Breedte (mm)	126,00
Hoogte (mm)	35,20
Diepte (mm)	155,65
Nettogewicht (kg)	0,59
Type vezels	50/125µm OM4 multimode
Kleur	RAL 7035
Insertion loss typical (dB)	≤0,2
Return loss typical (dB)	≥35
Omgevingstemperatuur min. (°C)	-10
Omgevingstemperatuur max. (°C)	70
Aantal glasvezels	12
Glasvezelaansluiting	LC

Maattekening: FO Splicebox DIN-rail 12x pigtails LC 50/ 125µm OM4

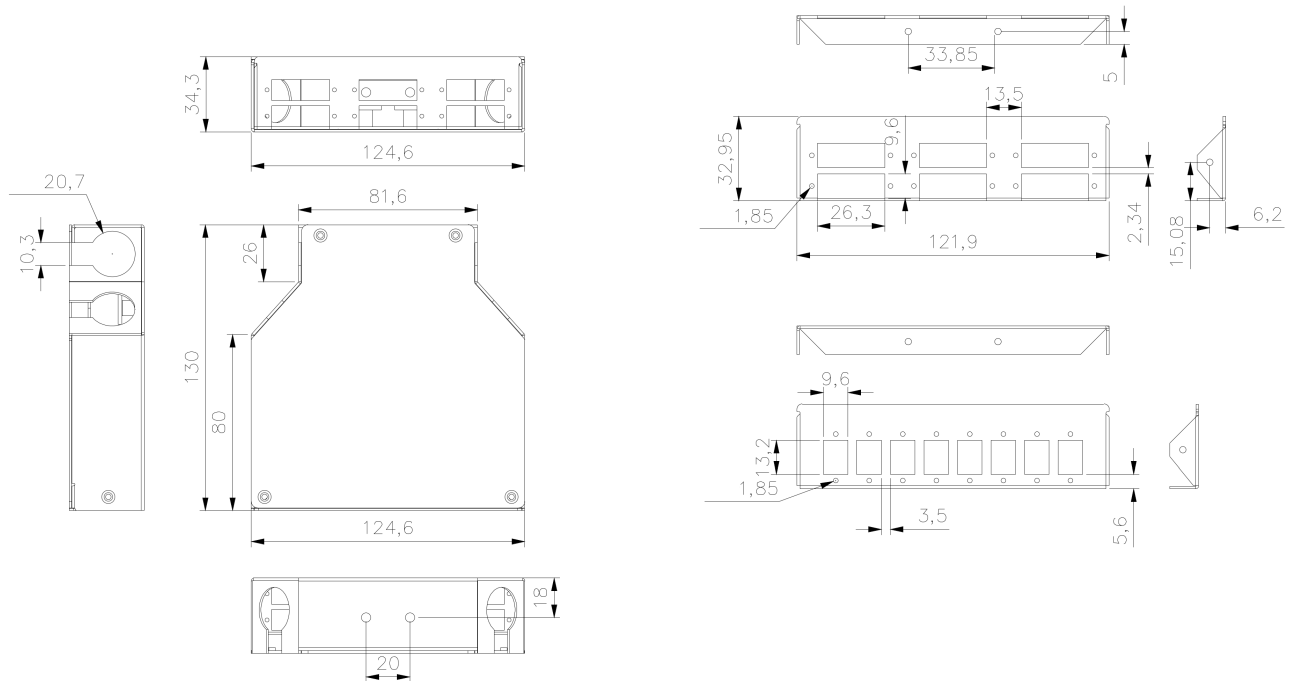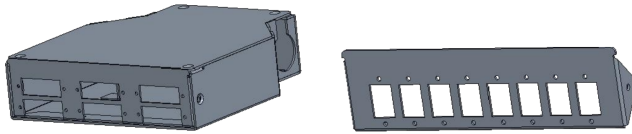

Artikeltabelle

BEZEICHNUNG	BEST.NR.
FO Splicebox DIN-rail 12x pigtails LC 50/125µm OM4 RAL7035, incl. Pigtails, incl. couplers, CLASSIC	HSLS124LR
Optionele toebehoren	
FO Splice lasbescherming 60mm (verpakking 10stk.)	HELSP00011
FO Splice lasbescherming 45mm (verpakking 10stk.)	HELSP00010
Glasvezelreinigingsstift LC en MU Suitable for UPC and APC connectors. More than 1,000 cleaning cycles.	HSLSZT001
OPM200 Glasvezeltester voor vermogensmeting	HSLSZT003
FO Patchkabel Duplex LC/LC 50/125µm OM4 LS0H-3 violet 2m LS0H, heather violet	HLP24LL02F
FO Patchkabel Duplex LC/LC 50/125µm OM4 LS0H-3 violet 5m LS0H, heather violet	HLP24LL05F
FO Patchkabel Duplex LC/SC 50/125µm OM4 LS0H-3 violet 2m LS0H, heather violet	HLP24LC02F
FO Patchkabel Duplex LC/SC 50/125µm OM4 LS0H-3 violet 5m LS0H, heather violet	HLP24LC05F