




Datenblatt für Artikel: HSELS480CS

PREMIUM FO Splicebox 19" 1HE leeg 24 SC-duplex koppelingen

PREMIUM



SCHRACK-Info

These spliceboxes comprise an upper enclosure section, a pull-out tray and 2 depth-adjustable 19" brackets. Pull-out trays are locked via two knurled screws for 24 SC Duplex couplers

Cable-entry:

- Four break-away style openings for M20 cable-gland
- One break-away style opening for optional available cable strain-relief (HSELSFTTDM)

Material: zinc-coated steel

Installation: 19", 1U



Dimensions WxHxD: 483x44x240mm

Color: black

Technische Daten

Breedte (mm)	482,50
Hoogte (mm)	43,60
Diepte (mm)	211,50
Nettogewicht (kg)	2,70
Kleur	RAL 9005
Omgevingstemperatuur min. (°C)	-10
Omgevingstemperatuur max. (°C)	70
Productgamma	Behuizingen

Afmetingen (mm)

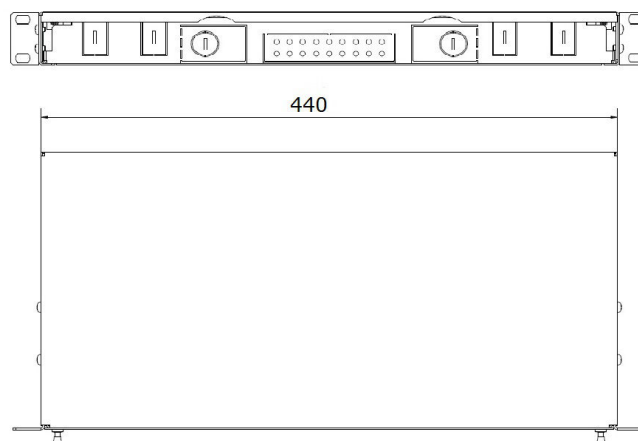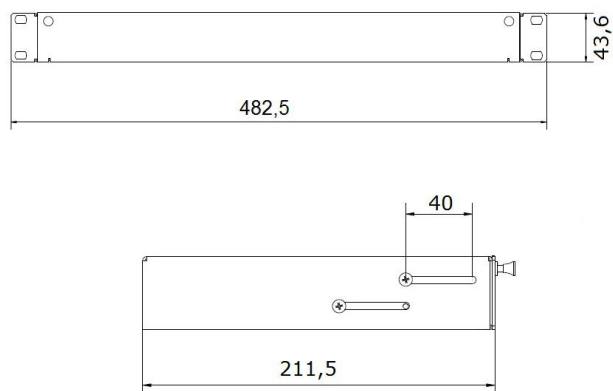

Artikeltabelle

BEZEICHNUNG	BEST.NR.
PREMIUM FO Splicebox 19" 1HE leeg 24 SC-duplex koppelingen PREMIUM	HSELS480CS
Optionele toebehoren	
FO Splicecassette zonder deksel of organiser Cassettes zijn stapelbaar met HSELSZSK04	HSELSZSK01
FO Lashouder 6 krimplasbeschermers (HELSP0001x) Voor gebruik met HSELSZSK01	HSELSZSK02
FO Deksel voor splicecassette HSELSZSK01 wit Voor gebruik met HSELSZSK01	HSELSZSK03
Scharnier voor splicecassette per 100stk. blauw Voor gebruik met HSELSZSK01	HSELSZSK04
FO Lashouder 12 krimplasbeschermers (HELSP0001x) Voor gebruik met HSELSZSK01	HSELSZSK05
FO Splice lasbescherming 60mm (verpakking 10stk.)	HELSP00011
Kabelwartel M20 LVZZKVS20	HELSP00012
Wartel M20 x1,5 RAL7035 polyamide Kabeldiameter 7mm- 12mm	M270020
Tegenmoer M20 x1,5 RAL7035 polyamide	M271020
Koppeling SC-Duplex SM kunststof brons flens grijs	HMOL000059
Koppeling SC-Duplex SM kunststof zirconia flens blauw	HMOL000054
FO Pigtail SC 50/125µm OM3 2m 4stks. aqua	HLP03C002E
FO Pigtail SC 9/125µm OS2 2m 4stks. colored according to IEC 60304, CLASSIC	HLP09C042P
FO Pigtail SC 9/125µm OS2 2m 12stks. colored according to IEC 60304, CLASSIC	HLP09C122P
FO Pigtail SC 50/125µm OM4 2m 4stks. colored according to IEC 60304, CLASSIC	HLP04C042P