


Datenblatt für Artikel: HSELSK09MR

FFTH Glasvezelkoppeling LC/APC-Simplex plastiek OS2


without flange, green, dustcover-shutter, CLASSIC

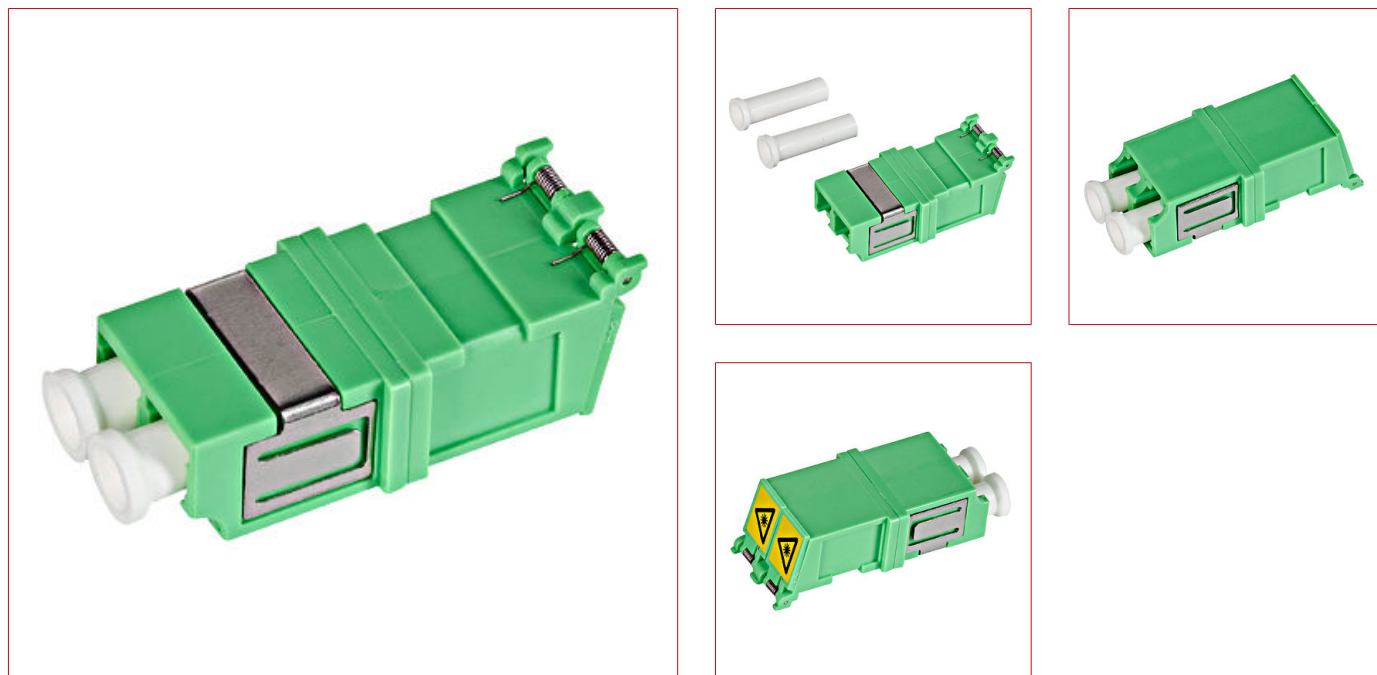

Technische Daten

Breedte (mm)	19,00
Hoogte (mm)	10,00
Nettogewicht (kg)	0,01
FO aansluitingen	LC/APC
Type vezels	9/125µm OS2 Singlemode/ G.657.A2
Kleur	Groen
Insertion loss typical (dB)	≤0,2
Omgevingstemperatuur min. (°C)	-40
Omgevingstemperatuur max. (°C)	75
Productgamma	Koppeling

Afmetingen (mm)

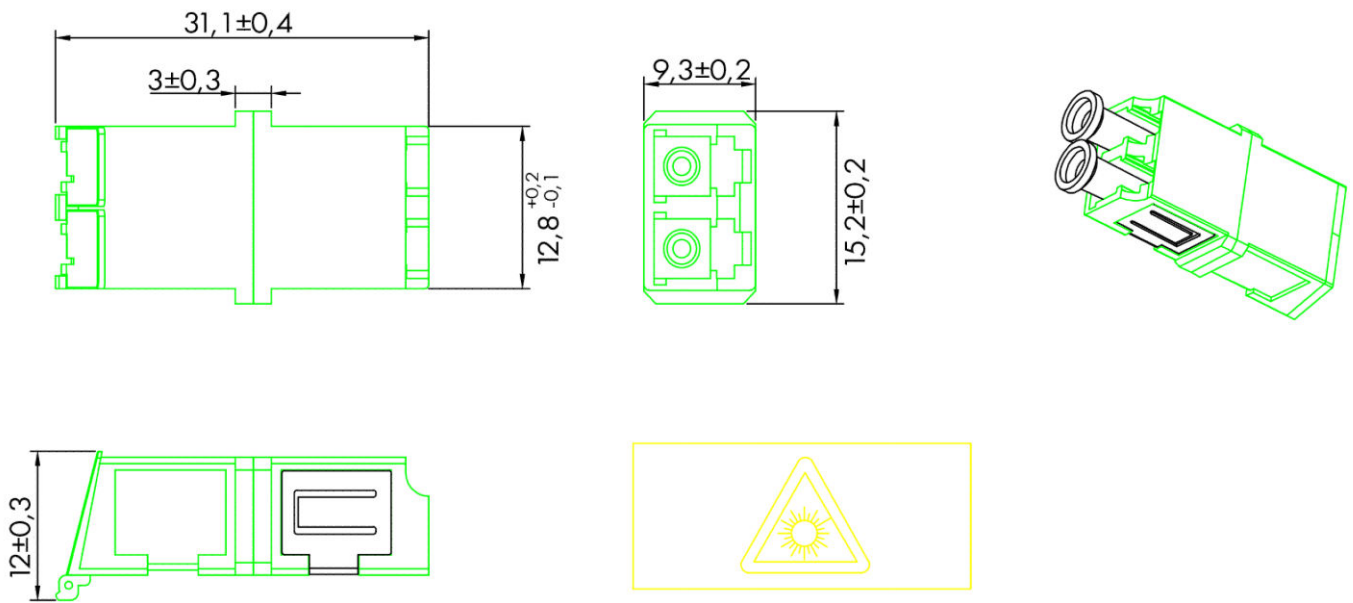

[mm]

Artikeltabelle

BEZEICHNUNG	BEST.NR.
FTTH Glasvezelkoppeling LC/APC-Simplex plastic OS2 without flange, green, dustcover-shutter, CLASSIC	HSELSK09MR
Optionele toebehoren	
FTTH Opbouwbehuizing 80x80x28mm leeg voor 4-fibers wit RAL9010 Pure white, also suitable for DIN-rail installation	HSELDA40WP
FTTH Pigtaills LC/APC 8° OS2 9/125µm G657.A2 l=1m 4 stuks Easy Strip, colored according to IEC 60304, CLASSIC	HLP09M041P
FO Pigtail LC/APC 9/125µm OS2 2m 4stks. colored according to IEC 60304, CLASSIC	HLP09M042P
FO Pigtail LC/APC 9/125µm OS2 2m 8stks. colored according to IEC 60304, CLASSIC	HLP09M082P
FO Pigtail LC/APC 9/125µm OS2 2m 12stks. colored according to IEC 60304, CLASSIC	HLP09M122P