


Datenblatt für Artikel: HSLMGOL-02

preLink SL RJ45 Shielded Cat.6a PU:24

without Cable Termination, CKPAO101

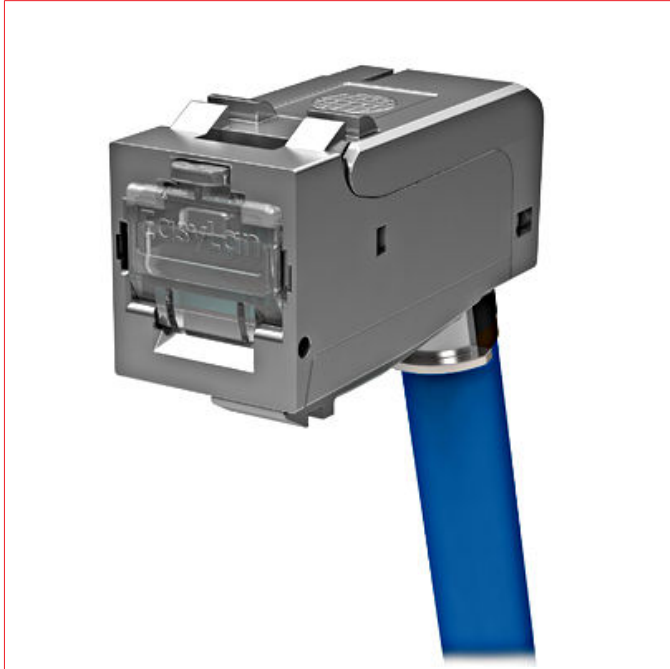

Technische Daten

Netto lengte (mm)	38,00
Hoogte (mm)	20,80
Diepte (mm)	12,30
Nettogewicht (kg)	0,03
Omgevingstemperatuur min. (°C)	-30
Omgevingstemperatuur max. (°C)	70

Artikeltabelle

BEZEICHNUNG	BEST.NR.
preLink SL RJ45 Shielded Cat.6a PU:24 without Cable Termination, CKPAO101	HSLMGOL-02