


Datenblatt für Artikel: IL0062182F

Modul 2000 Opbouwkader met deur 2A-18 2-flenzen

Sheet steel, RAL7035, 1 gland plate above and below

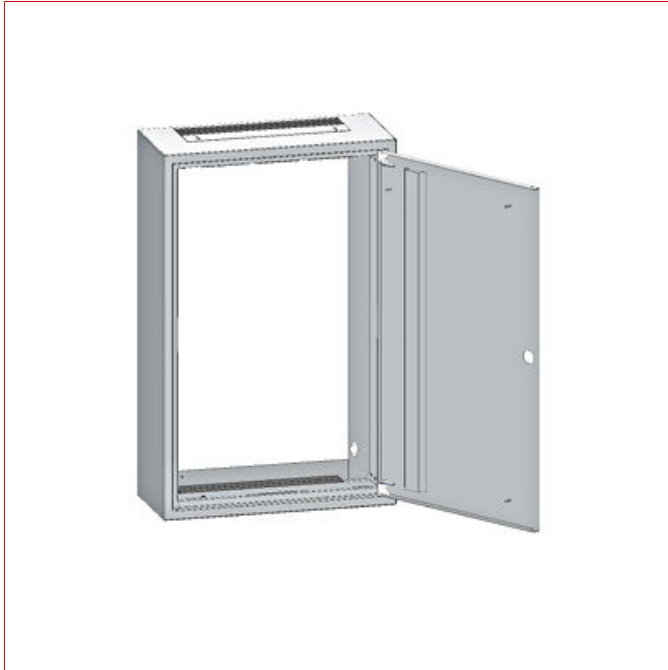

SCHRACK-Info


- Modular designed wall-mounted frame with door
- Material: 1.25 mm powder coated sheet steel
- Phosphated, plastic powder-coated sheet steel enclosure tested and certified according to EN 62208:2011 and EN 60529:1991, protection class I suitable for TT/TN and IT network form, protection insulated according to ÖVE-IM 12
- Standard version of door with flush plastic thumbturn operated via integrated double-bit lock
- rated voltage U_e : 230/400V/50Hz
- rated insulation voltage U_i : 1000V
- rated impulse withstand voltage U_{imp} : 6kV
- rated short time withstand current I_{cw} : 25kA / 1s
- rated peak withstand current I_{pk} : 54kA
- rated conditional short-circuit current I_{cc} : 25kA
- Protective earth connection: Welded bolt M6, $I^2t=3,6 \times 10^6 \text{ A}^2\text{s}$
- Protection class: I
- Ambient temperature: -5 to +40°C
- Relative humidity: 50% at +40°C
- Max. allowed load capacity: Use 150kg floor-mounted / Use 80kg wall-mounted (without additional supports) / door 10kg
- EMV: EMV Environment 1
- Distribution board Insert width D: 500mm / Height E: 830mm



Technische Daten

Breedte (mm)	590,00
Hoogte (mm)	915,00
Diepte (mm)	250,00
Nettogewicht (kg)	26,00
EAN CODE	9004840670271
Stroomwarmteverliezen (W)	-264,00
Product	Opbouw
Kleur	RAL 7035
Breedte kast	2
Hoogte eenheden	18
Beschermingsgraad	IP20C
Basisbeschrijving	Chassis

Afmetingen (mm)

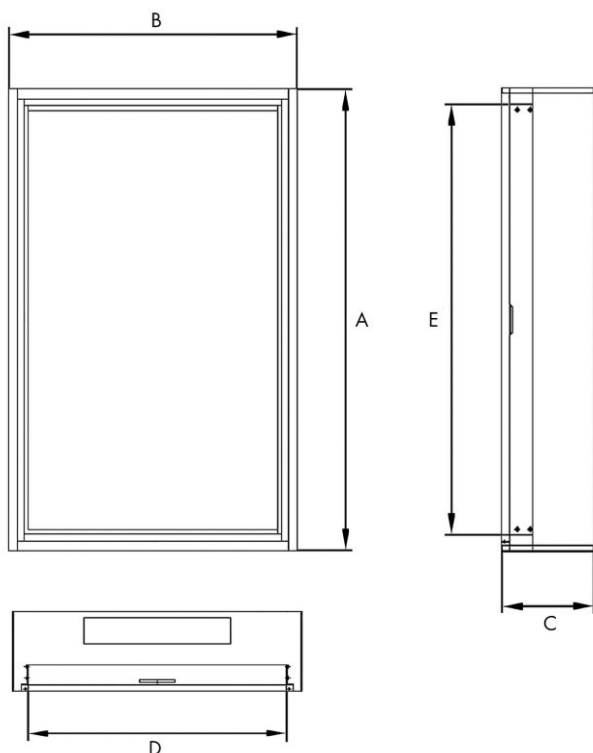

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Modul 2000 Opbouwkader met deur 2A-18 2-flenzen Sheet steel, RAL7035, 1 gland plate above and below	IL0062182F
Optionele toebehoren	
Modul 2000 Plaat met rubber doorvoeringen 440x130x15mm IP20C Breedte 2, 3, 4, 5	IL900105
Modul 2000 Plaat met rubber doorvoeringen 426x130x15mm IP20C Doorvoeringen 28x 13mm, 16x 17mm, 4x 30mm	IL900102