


Datenblatt für Artikel: IL146542-A

Metering insert 5-42G compl. 10 cou. pl. front pl. st. Wien

Frontblende Stahlblech, komplett

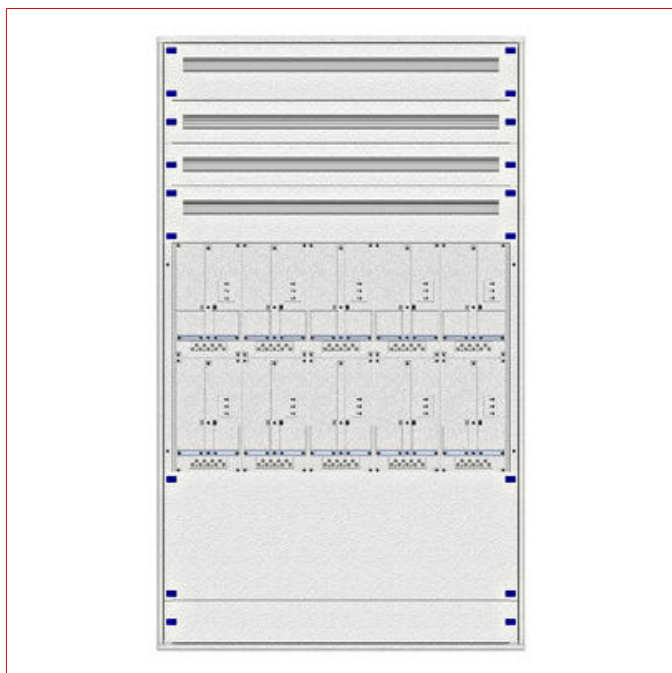

Technische Daten

Breedte (mm)	1.140,00
Hoogte (mm)	1.935,00
Diepte (mm)	150,00
EAN CODE	9004840961836
Product	Tellerverdeelinzet
Provincie	Wien
Chassisdelen	Frontplaten staal
Kleur	RAL 7035
Breedte kast	5
Hoogte eenheden	42
Aantal rijen	2
Tellerplaatsen	10
Secundaire rijen	6
Materiaal frontplaten	Plaatstaal
Basisbeschrijving	Inzet
Breedte in modules	342

Artikeltabelle

BEZEICHNUNG	KUPFERGEWICHT (kg/km)	BEST.NR.
Metering insert 5-42G compl. 10 cou. pl. front pl. st. Wien Frontblende Stahlblech, komplett		IL146542-A
Optionele toebehoren		
Aardingsverbinding 300mm 6mm ²		IL900099
Plug-in counter bar 50A for Vienna, Tyrol and Styria Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from coated Copper, RoHS konform, OVE R21:2019		IL900189
Plug-in counter bar 50A, PU = 64 Pieces Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189-A
Plug-in counter bar pins 63A, 44mm, PU=7 pieces		IL900190
Cover for Plug-in counter bars		IL900191
Meter Connection Terminal 50A for Czech Republic, wired 1,3m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	975	IL901816
Meter Connection Terminal 50A for Czech Republic, wired 1,8m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1350	IL901820
Meter Connection Terminal 50A for Czech Republic, wired 2,3m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1725	IL901824