


Tiwag insert 3EK28-T25 counter bar

vorverdrahtet mit Hauptabzweigklemme 5 x 35mm² isoliert, Überspannungsableiter Vartec 255V / 20kA TN-C Set, Tarifschalter 20-32A, Zählerschleife 10mm² + Zähleranschlussklemme 4-pol. montiert, FI-Schalter 40A, 4-polig, 30mA, vsf., Bauart G, Typ A, PE-Schiene 16mm² + Nullungsverbindung Ym 16mm²

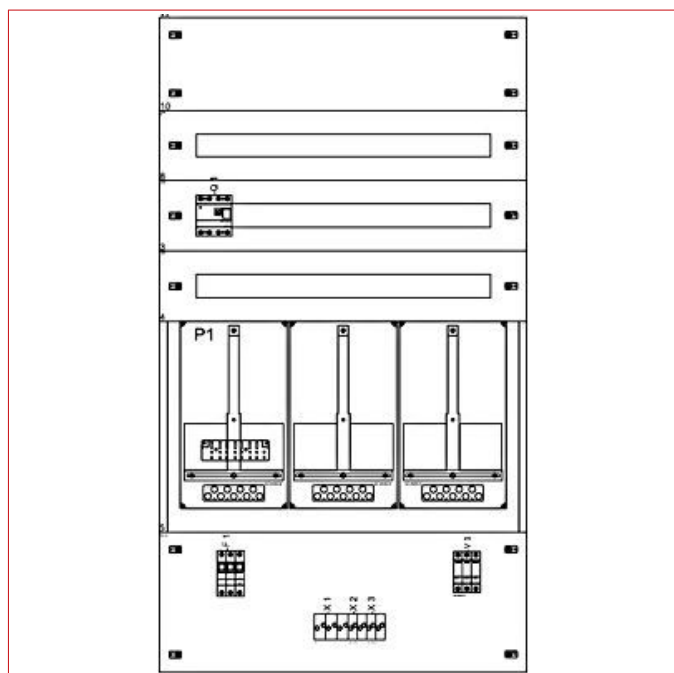

Technische Daten

EAN CODE	9004840966619
Provincie	Tirol
Breedte kast	3
Hoogte eenheden	28
Aantal rijen	1
Tellerplaatsen	3
Secundaire rijen	4
Materiaal frontplaten	Plaatstaal
Basisbeschrijving	Inzet
Breedte in modules	132

Artikeltabelle

BEZEICHNUNG	KUPFERGEWICHT (kg/km)	BEST.NR.
Tiwag insert 3EK28-T25 counter bar vorverdrahtet mit Hauptabzweigklemme 5 x 35mm ² isoliert, Überspannungsableiter Vartec 255V / 20kA TN-C Set, Tarifschalter 20-32A, Zählerschleife 10mm ² + Zähleranschlussklemme 4-pol. montiert, FI-Schalter 40A, 4-polig, 30mA, vsf., Bauart G, Typ A, PE-Schiene 16mm ² + Nullungsverbindung Ym 16mm ²		IL190028-A
Optionele toebehoren		
Aardingsverbinding 300mm 6mm ²		IL900099
Plug-in counter bar 50A for Vienna, Tyrol and Styria Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from coated Copper, RoHS konform, OVE R21:2019		IL900189
Plug-in counter bar 50A, PU = 64 Pieces Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189-A
Plug-in counter bar pins 63A, 44mm, PU=7 pieces		IL900190
Cover for Plug-in counter bars		IL900191
Meter Connection Terminal 50A for Czech Republic, wired 1,3m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	975	IL901816
Meter Connection Terminal 50A for Czech Republic, wired 1,8m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1350	IL901820
Meter Connection Terminal 50A for Czech Republic, wired 2,3m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1725	IL901824