


Datenblatt für Artikel: IL433545-A

# Zählerverteiler Einsatz 5-45M, 15 Zählerplätze, Tirol

Frontblende Stahlblech, komplett

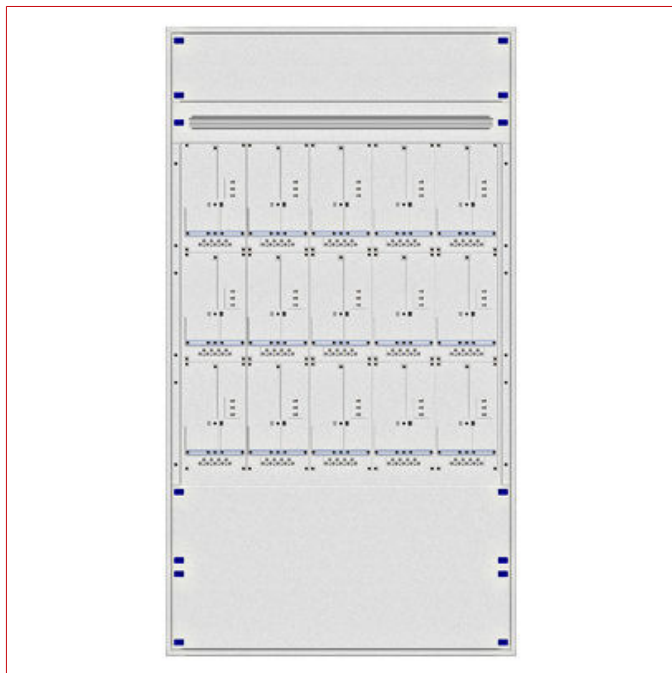

## Technische Daten

|                       |                    |
|-----------------------|--------------------|
| Breedte (mm)          | 1.140,00           |
| Hoogte (mm)           | 2.070,00           |
| Diepte (mm)           | 150,00             |
| EAN CODE              | 9004840967241      |
| Product               | Tellerverdeelinzet |
| Provincie             | Tirol              |
| Chassisdelen          | Frontplaten staal  |
| Kleur                 | RAL 7035           |
| Breedte kast          | 5                  |
| Hoogte eenheden       | 45                 |
| Aantal rijen          | 3                  |
| Tellerplaatsen        | 15                 |
| Secundaire rijen      | 1                  |
| Materiaal frontplaten | Plaatstaal         |
| Basisbeschrijving     | Inzet              |
| Breedte in modules    | 57                 |



## Artikeltabelle

| BEZEICHNUNG                                                                                                                                                                                                                                                                                                                                                    | KUPFERGEWICHT (kg/km) | BEST.NR.   |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|------------|
| Zählerverteiler Einsatz 5-45M, 15 Zählerplätze, Tirol<br>Frontblende Stahlblech, komplett                                                                                                                                                                                                                                                                      |                       | IL433545-A |
| <b>Optionele toebehoren</b>                                                                                                                                                                                                                                                                                                                                    |                       |            |
| Aardingsverbinding 300mm 6mm <sup>2</sup>                                                                                                                                                                                                                                                                                                                      |                       | IL900099   |
| Plug-in counter bar 50A for Vienna, Tyrol and Styria<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from coated Copper, RoHS konform, OVE R21:2019                |                       | IL900189   |
| Plug-in counter bar 50A, PU = 64 Pieces<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019                      |                       | IL900189-A |
| Plug-in counter bar pins 63A, 44mm, PU=7 pieces                                                                                                                                                                                                                                                                                                                |                       | IL900190   |
| Cover for Plug-in counter bars                                                                                                                                                                                                                                                                                                                                 |                       | IL900191   |
| Meter Connection Terminal 50A for Czech Republic, wired 1,3m<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 975                   | IL901816   |
| Meter Connection Terminal 50A for Czech Republic, wired 1,8m<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1350                  | IL901820   |
| Meter Connection Terminal 50A for Czech Republic, wired 2,3m<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1725                  | IL901824   |