


Installation terminal block PTI 16 NLS-FI BU

Push-in connection, cross section: 0.5 mm² - 25 mm², AWG: 20 - 4, width: 12.2 mm, color: blue, NS 35/7.5, NS 35/15

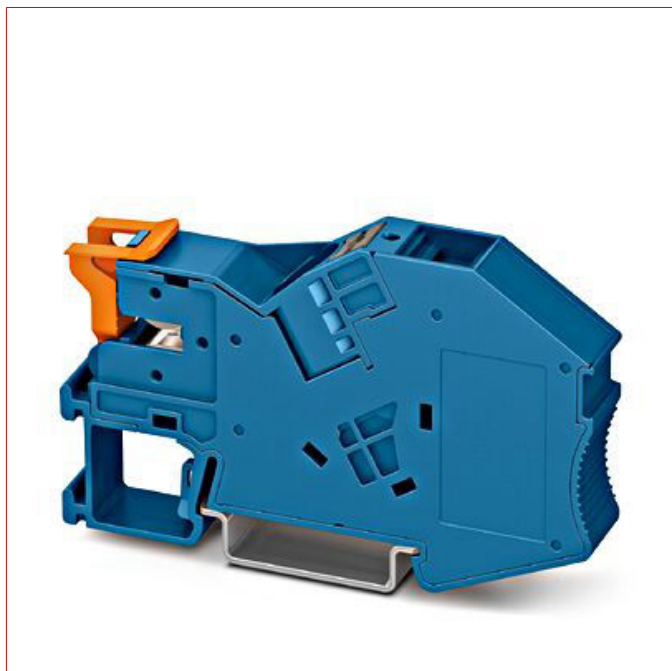

Technische Daten

Diepte (mm)	48,50
Breedte (mm)	12,20
Hoogte (mm)	81,90
Nettogewicht (kg)	0,03
EAN CODE	4055626532479
Stroomwarmteverliezen (W)	2,43
Omgevingstemperatuur min. (°C)	-60
Omgevingstemperatuur max. (°C)	110
Basisbeschrijving	Klemmen
Systeem	Push-In
Productgamma	PT
Productgroep	Klemmen
Maximale aansluitcapaciteit vaste geleiders (mm ²)	25
Maximale aansluitcapaciteit soepele geleiders (mm ²)	16
Maximale aansluitcapaciteit soepele geleiders met adereindhulzen (mm ²)	16
Minimale aansluitcapaciteit vaste geleiders (mm ²)	0,50
Minimale aansluitcapaciteit soepele geleiders (mm ²)	0,50

Technische Daten - Fortsetzung

Minimale aansluitcapaciteit soepele geleiders met adereindhulzen (mm ²)	0,50
Aansluitcapaciteit (mm ²)	16
Kleur	Blauw
Nominale stroom (A)	70

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Installation terminal block PTI 16 NLS-FI BU	IP1030131
Push-in connection, cross section: 0.5 mm² - 25 mm², AWG: 20 - 4, width: 12.2 mm, color: blue, NS 35/7.5, NS 35/15	
Optionele toebehoren	
End bracket CLIPFIX 15, to be snapped onto NS 15 DIN rail	IP3022263
Snap-on end bracket, color: gray	
End bracket CLIPFIX 35-5, for NS 35/7,5 or NS 35/15	IP3022276
Quick mounting end clamp, with marking option, width: 5.15 mm, color: gray	
End bracket CLIPFIX 35, for NS 35/7,5 DIN rail or NS 35/15	IP3022218
Quick mounting end clamp, with marking option, width: 9.5 mm, color: gray	
End bracket E/UK	IP1201442
End clamp, Width: 9.5 mm, Height: 35.3 mm, Length: 50.5 mm, Color: gray	
End bracket E/UK 1	IP1201413
End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray	
End bracket E/MBK	IP1401637
End clamp, width: 6.2 mm, color: gray	
End bracket E/MK 1	IP1421659
End clamp width: 6 mm, color: gray	
End bracket E/NS 35 N	IP0800886
End clamp, width: 9.5 mm, color: gray	
Zack marker strip ZB 5, consecutive numbers 1-10	IP10500171
Strip, white, snap into tall marker groove, for terminal width: 5.15 mm, lettering field: 5.15 x 10.5 mm	
Zack marker strip ZB 5, consecutive numbers 11-20	IP10500172
Strip, white, snap into tall marker groove, for terminal width: 5.15 mm, lettering field: 5.15 x 10.5 mm	
Zack marker strip ZB 5, consecutive numbers 21-30	IP10500173
Strip, white, snap into tall marker groove, for terminal width: 5.15 mm, lettering field: 5.15 x 10.5 mm	

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Optionele toebehoren	
Zack marker strip ZB 5, consecutive numbers 31-40	IP10500174
Strip, white, snap into tall marker groove, for terminal width: 5.15 mm, lettering field: 5.15 x 10.5 mm	
Zack marker strip ZB 5, consecutive numbers 41-50	IP10500175
Strip, white, snap into tall marker groove, for terminal width: 5.15 mm, lettering field: 5.15 x 10.5 mm	
Zack marker strip ZB 5, consecutive numbers 51-60	IP10500176
Strip, white, snap into tall marker groove, for terminal width: 5.15 mm, lettering field: 5.15 x 10.5 mm	
Zack marker strip ZB 5, consecutive numbers 61-70	IP10500177
Strip, white, snap into tall marker groove, for terminal width: 5.15 mm, lettering field: 5.15 x 10.5 mm	
Zack marker strip ZB 5, consecutive numbers 71-80	IP10500178
Strip, white, snap into tall marker groove, for terminal width: 5.15 mm, lettering field: 5.15 x 10.5 mm	
Zack marker strip ZB 5, consecutive numbers 81-90	IP10500179
Strip, white, snap into tall marker groove, for terminal width: 5.15 mm, lettering field: 5.15 x 10.5 mm	
Zack marker strip ZB 5, consecutive numbers 91-100	IP1050017H
Strip, white, snap into tall marker groove, for terminal width: 5.15 mm, lettering field: 5.15 x 10.5 mm	
Zack marker strip flat ZBF 5, consecutive numbers 1-10	IP08086711
Strip, white, snap into flat marker groove, for terminal width: 5 mm, lettering field: 5 x 5.2 mm	
Zack marker strip flat ZBF 5, consecutive numbers 11-20	IP08086712
Strip, white, snap into flat marker groove, for terminal width: 5 mm, lettering field: 5 x 5.2 mm	
Zack marker strip flat ZBF 5, consecutive numbers 21-30	IP08086713
Strip, white, snap into flat marker groove, for terminal width: 5 mm, lettering field: 5 x 5.2 mm	
Zack marker strip flat ZBF 5, consecutive numbers 31-40	IP08086714
Strip, white, snap into flat marker groove, for terminal width: 5 mm, lettering field: 5 x 5.2 mm	
Zack marker strip flat ZBF 5, consecutive numbers 41-50	IP08086715
Strip, white, snap into flat marker groove, for terminal width: 5 mm, lettering field: 5 x 5.2 mm	
Zack marker strip flat ZBF 5, consecutive numbers 51-60	IP08086716
Strip, white, snap into flat marker groove, for terminal width: 5 mm, lettering field: 5 x 5.2 mm	
Zack marker strip flat ZBF 5, consecutive numbers 61-70	IP08086717
Strip, white, snap into flat marker groove, for terminal width: 5 mm, lettering field: 5 x 5.2 mm	
Zack marker strip flat ZBF 5, consecutive numbers 71-80	IP08086718
Strip, white, snap into flat marker groove, for terminal width: 5 mm, lettering field: 5 x 5.2 mm	
Zack marker strip flat ZBF 5, consecutive numbers 81-90	IP08086719
Strip, white, snap into flat marker groove, for terminal width: 5 mm, lettering field: 5 x 5.2 mm	
Zack marker strip flat ZBF 5, consecutive numbers 91-100	IP0808671H
Strip, white, snap into flat marker groove, for terminal width: 5 mm, lettering field: 5 x 5.2 mm	
End cover D-PTI/3	IP3213975
End cover, length: 101 mm, width: 2.2 mm, height: 48.2 mm, color: grey	
Support bracket AB-PTI/3	IP3213974
Bracket for busbars, set every 20 cm, modular dimensions: 200 x 103 mm, 2 mm x 46 mm, poles: 1, blue	

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Optionele toebehoren	
Plug-in bridge FBS 2-5	IP3030161
Plug-in bridge, pitch: 5.2 mm, length: 22.7 mm, width: 9 mm, poles: 2, color: red	
Plug-in bridge FBS 3-5	IP3030174
Plug-in bridge, pitch: 5.2 mm, length: 22.7 mm, width: 14.2 mm, poles: 3, color: red	
Plug-in bridge FBS 4-5	IP3030187
Plug-in bridge, pitch: 5.2 mm, length: 22.7 mm, width: 19,4 mm, poles: 4, color: red	
Plug-in bridge FBS 5-5	IP3030190
Plug-in bridge, pitch: 5.2 mm, length: 22.7 mm, width: 24.6 mm, poles: 5, color: red	
Plug-in bridge FBS 10-5	IP3030213
Plug-in bridge, pitch: 5.2 mm, length: 22.7 mm, width: 50.6 mm, poles: 10, color: red	
Plug-in bridge FBS 20-5	IP3030226
Plug-in bridge, pitch: 5.2 mm, poles: 20, color: red	
Plug-in bridge FBSR 2-5	IP3033702
Plug-in bridge, pitch: 5.2 mm, poles: 2, color: red	
Plug-in bridge FBSR 3-5	IP3001591
Plug-in bridge, pitch: 5.2 mm, poles: 3, color: red	
Plug-in bridge FBSR 5-5	IP3001593
Plug-in bridge, pitch: 5.2 mm, poles: 5, color: red	
Test adapter PAI-4-N GY	IP3032871
Test adapter, color: grey	
Screwdriver 0.6 x 3.5 (SZF 1-0.6X3.5)	IP1204517
Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip	