


Datenblatt für Artikel: IP3211867-

## Ground modular terminal block PTS 2,5-PE

Push-in connection, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, width: 5.2 mm, green-yellow, NS 35/7.5, NS 35/15

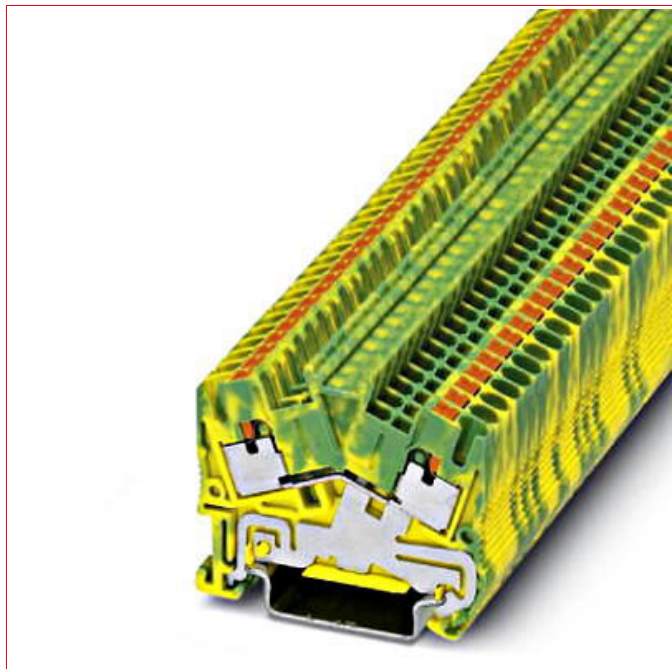

### Technische Daten

|                                                                                     |               |
|-------------------------------------------------------------------------------------|---------------|
| Diepte (mm)                                                                         | 43,00         |
| Breedte (mm)                                                                        | 5,20          |
| Hoogte (mm)                                                                         | 49,00         |
| Nettogewicht (kg)                                                                   | 0,01          |
| EAN CODE                                                                            | 4046356499507 |
| Omgevingstemperatuur min. (°C)                                                      | -40           |
| Omgevingstemperatuur max. (°C)                                                      | 120           |
| Basisbeschrijving                                                                   | Klemmen       |
| Systeem                                                                             | Push-In       |
| Productgamma                                                                        | PT            |
| Productgroep                                                                        | Aardingsklem  |
| Maximale aansluitcapaciteit vaste geleiders (mm <sup>2</sup> )                      | 4             |
| Maximale aansluitcapaciteit soepele geleiders (mm <sup>2</sup> )                    | 2,50          |
| Maximale aansluitcapaciteit soepele geleiders met adereindhulzen (mm <sup>2</sup> ) | 2,50          |
| Minimale aansluitcapaciteit vaste geleiders (mm <sup>2</sup> )                      | 0,14          |
| Minimale aansluitcapaciteit soepele geleiders (mm <sup>2</sup> )                    | 0,14          |

## Technische Daten - Fortsetzung

|                                                                                     |       |
|-------------------------------------------------------------------------------------|-------|
| Minimale aansluitcapaciteit soepele geleiders met adereindhulzen (mm <sup>2</sup> ) | 0,14  |
| Aansluitcapaciteit (mm <sup>2</sup> )                                               | 2,5   |
| Kleur                                                                               | Groen |

## Artikeltabelle

| BEZEICHNUNG                                                                                                                                                                              | BEST.NR.   |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Ground modular terminal block PTS 2,5-PE<br>Push-in connection, cross section: 0.14 mm <sup>2</sup> - 4 mm <sup>2</sup> , AWG: 26 - 12, width: 5.2 mm, green-yellow, NS 35/7.5, NS 35/15 | IP3211867  |
| <b>Optionele toebehoren</b>                                                                                                                                                              |            |
| End bracket CLIPFIX 15, to be snapped onto NS 15 DIN rail<br>Snap-on end bracket, color: gray                                                                                            | IP3022263  |
| End bracket CLIPFIX 35-5, for NS 35/7.5 or NS 35/15<br>Quick mounting end clamp, with marking option, width: 5.15 mm, color: gray                                                        | IP3022276  |
| End bracket CLIPFIX 35, for NS 35/7.5 DIN rail or NS 35/15<br>Quick mounting end clamp, with marking option, width: 9.5 mm, color: gray                                                  | IP3022218  |
| End bracket E/UK<br>End clamp, Width: 9.5 mm, Height: 35.3 mm, Length: 50.5 mm, Color: gray                                                                                              | IP1201442  |
| End bracket E/UK 1<br>End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray                                                     | IP1201413  |
| End bracket E/MBK<br>End clamp, width: 6.2 mm, color: gray                                                                                                                               | IP1401637  |
| End bracket E/MK 1<br>End clamp width: 6 mm, color: gray                                                                                                                                 | IP1421659  |
| End bracket E/NS 35 N<br>End clamp, width: 9.5 mm, color: gray                                                                                                                           | IP0800886  |
| Zack marker strip ZB 5, consecutive numbers 1-10<br>Strip, white, snap into tall marker groove, for terminal width: 5.15 mm, lettering field: 5.15 x 10.5 mm                             | IP10500171 |
| Zack marker strip ZB 5, consecutive numbers 11-20<br>Strip, white, snap into tall marker groove, for terminal width: 5.15 mm, lettering field: 5.15 x 10.5 mm                            | IP10500172 |
| Zack marker strip ZB 5, consecutive numbers 21-30<br>Strip, white, snap into tall marker groove, for terminal width: 5.15 mm, lettering field: 5.15 x 10.5 mm                            | IP10500173 |
| Zack marker strip ZB 5, consecutive numbers 31-40<br>Strip, white, snap into tall marker groove, for terminal width: 5.15 mm, lettering field: 5.15 x 10.5 mm                            | IP10500174 |

## Artikeltabelle

| BEZEICHNUNG                                                                                                                                                                                     | BEST.NR.   |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| <b>Optionele toebehoren</b>                                                                                                                                                                     |            |
| Zack marker strip ZB 5, consecutive numbers 41-50<br>Strip, white, snap into tall marker groove, for terminal width: 5.15 mm, lettering field: 5.15 x 10.5 mm                                   | IP10500175 |
| Zack marker strip ZB 5, consecutive numbers 51-60<br>Strip, white, snap into tall marker groove, for terminal width: 5.15 mm, lettering field: 5.15 x 10.5 mm                                   | IP10500176 |
| Zack marker strip ZB 5, consecutive numbers 61-70<br>Strip, white, snap into tall marker groove, for terminal width: 5.15 mm, lettering field: 5.15 x 10.5 mm                                   | IP10500177 |
| Zack marker strip ZB 5, consecutive numbers 71-80<br>Strip, white, snap into tall marker groove, for terminal width: 5.15 mm, lettering field: 5.15 x 10.5 mm                                   | IP10500178 |
| Zack marker strip ZB 5, consecutive numbers 81-90<br>Strip, white, snap into tall marker groove, for terminal width: 5.15 mm, lettering field: 5.15 x 10.5 mm                                   | IP10500179 |
| Zack marker strip ZB 5, consecutive numbers 91-100<br>Strip, white, snap into tall marker groove, for terminal width: 5.15 mm, lettering field: 5.15 x 10.5 mm                                  | IP1050017H |
| Zack marker strip flat ZBF 5, consecutive numbers 1-10<br>Strip, white, snap into flat marker groove, for terminal width: 5 mm, lettering field: 5 x 5.2 mm                                     | IP08086711 |
| Zack marker strip flat ZBF 5, consecutive numbers 11-20<br>Strip, white, snap into flat marker groove, for terminal width: 5 mm, lettering field: 5 x 5.2 mm                                    | IP08086712 |
| Zack marker strip flat ZBF 5, consecutive numbers 21-30<br>Strip, white, snap into flat marker groove, for terminal width: 5 mm, lettering field: 5 x 5.2 mm                                    | IP08086713 |
| Zack marker strip flat ZBF 5, consecutive numbers 31-40<br>Strip, white, snap into flat marker groove, for terminal width: 5 mm, lettering field: 5 x 5.2 mm                                    | IP08086714 |
| Zack marker strip flat ZBF 5, consecutive numbers 41-50<br>Strip, white, snap into flat marker groove, for terminal width: 5 mm, lettering field: 5 x 5.2 mm                                    | IP08086715 |
| Zack marker strip flat ZBF 5, consecutive numbers 51-60<br>Strip, white, snap into flat marker groove, for terminal width: 5 mm, lettering field: 5 x 5.2 mm                                    | IP08086716 |
| Zack marker strip flat ZBF 5, consecutive numbers 61-70<br>Strip, white, snap into flat marker groove, for terminal width: 5 mm, lettering field: 5 x 5.2 mm                                    | IP08086717 |
| Zack marker strip flat ZBF 5, consecutive numbers 71-80<br>Strip, white, snap into flat marker groove, for terminal width: 5 mm, lettering field: 5 x 5.2 mm                                    | IP08086718 |
| Zack marker strip flat ZBF 5, consecutive numbers 81-90<br>Strip, white, snap into flat marker groove, for terminal width: 5 mm, lettering field: 5 x 5.2 mm                                    | IP08086719 |
| Zack marker strip flat ZBF 5, consecutive numbers 91-100<br>Strip, white, snap into flat marker groove, for terminal width: 5 mm, lettering field: 5 x 5.2 mm                                   | IP0808671H |
| Screwdriver 0.6 x 3.5 ( SZF 1-0.6X3.5)<br>Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip | IP1204517  |