


# Feed-through terminal block PTS 1,5/S-TWIN

Push-in connection, cross section: 0.14 mm<sup>2</sup> - 1.5 mm<sup>2</sup>, AWG: 26 - 14, width: 3.5 mm, height: 37 mm, grey

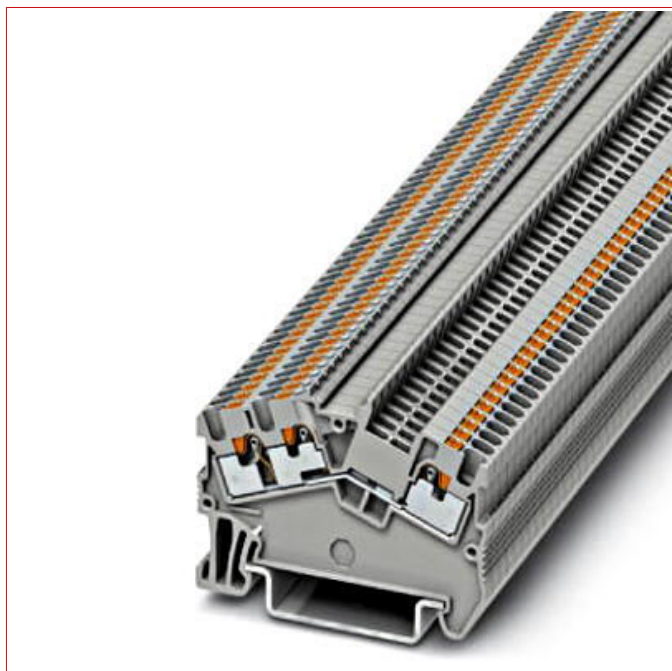

## Technische Daten

|                                                                                     |               |
|-------------------------------------------------------------------------------------|---------------|
| Diepte (mm)                                                                         | 37,00         |
| Breedte (mm)                                                                        | 3,50          |
| Hoogte (mm)                                                                         | 50,70         |
| Nettogewicht (kg)                                                                   | 0,01          |
| EAN CODE                                                                            | 4046356616324 |
| Stroomwarmteverliezen (W)                                                           | 0,56          |
| Omgevingstemperatuur min. (°C)                                                      | -40           |
| Omgevingstemperatuur max. (°C)                                                      | 120           |
| Basisbeschrijving                                                                   | Klemmen       |
| Systeem                                                                             | Push-In       |
| Productgamma                                                                        | PT            |
| Productgroep                                                                        | Klemmen       |
| Maximale aansluitcapaciteit vaste geleiders (mm <sup>2</sup> )                      | 1,50          |
| Maximale aansluitcapaciteit soepele geleiders (mm <sup>2</sup> )                    | 1,50          |
| Maximale aansluitcapaciteit soepele geleiders met adereindhulzen (mm <sup>2</sup> ) | 1             |
| Minimale aansluitcapaciteit vaste geleiders (mm <sup>2</sup> )                      | 0,14          |
| Minimale aansluitcapaciteit soepele geleiders (mm <sup>2</sup> )                    | 0,14          |

## Technische Daten - Fortsetzung

|                                                                                     |       |
|-------------------------------------------------------------------------------------|-------|
| Minimale aansluitcapaciteit soepele geleiders met adereindhulzen (mm <sup>2</sup> ) | 0,14  |
| Aansluitcapaciteit (mm <sup>2</sup> )                                               | 1,5   |
| Kleur                                                                               | Grijs |
| Nominale stroom (A)                                                                 | 17,50 |

## Artikeltabelle

| BEZEICHNUNG                                                                                                    | BEST.NR.   |
|----------------------------------------------------------------------------------------------------------------|------------|
| Feed-through terminal block PTS 1,5/S-TWIN                                                                     | IP3214589  |
| Push-in connection, cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, width: 3.5 mm, height: 37 mm, grey        |            |
| Optionele toebehoren                                                                                           |            |
| End bracket CLIPFIX 15, to be snapped onto NS 15 DIN rail                                                      | IP3022263  |
| Snap-on end bracket, color: gray                                                                               |            |
| End bracket CLIPFIX 35-5, for NS 35/7,5 or NS 35/15                                                            | IP3022276  |
| Quick mounting end clamp, with marking option, width: 5.15 mm, color: gray                                     |            |
| End bracket CLIPFIX 35, for NS 35/7,5 DIN rail or NS 35/15                                                     | IP3022218  |
| Quick mounting end clamp, with marking option, width: 9.5 mm, color: gray                                      |            |
| End bracket E/UK                                                                                               | IP1201442  |
| End clamp, Width: 9.5 mm, Height: 35.3 mm, Length: 50.5 mm, Color: gray                                        |            |
| End bracket E/UK 1                                                                                             | IP1201413  |
| End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray |            |
| End bracket E/MBK                                                                                              | IP1401637  |
| End clamp, width: 6.2 mm, color: gray                                                                          |            |
| End bracket E/MK 1                                                                                             | IP1421659  |
| End clamp width: 6 mm, color: gray                                                                             |            |
| End bracket E/NS 35 N                                                                                          | IP0800886  |
| End clamp, width: 9.5 mm, color: gray                                                                          |            |
| Zack marker strip ZB 3,5, blank                                                                                | IP0829414  |
| Strip, white, snap into tall marker groove, for terminal width: 3.5 mm, lettering field: 3.5 x 10.5 mm         |            |
| Zack marker strip ZB 3,5, consecutive numbers 1-10                                                             | IP08014041 |
| Strip, white, snap into tall marker groove, for terminal width: 3.5 mm, lettering field: 3.5 x 10.5 mm         |            |
| Zack marker strip ZB 3,5, consecutive numbers 11-20                                                            | IP08014042 |
| Strip, white, snap into tall marker groove, for terminal width: 3.5 mm, lettering field: 3.5 x 10.5 mm         |            |

## Artikeltabelle

| BEZEICHNUNG                                                                                                                                                         | BEST.NR.   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| <b>Optionele toebehoren</b>                                                                                                                                         |            |
| Zack marker strip ZB 3,5, consecutive numbers 21-30<br>Strip, white, snap into tall marker groove, for terminal width: 3.5 mm, lettering field: 3.5 x 10.5 mm       | IP08014043 |
| Zack marker strip ZB 3,5, consecutive numbers 31-40<br>Strip, white, snap into tall marker groove, for terminal width: 3.5 mm, lettering field: 3.5 x 10.5 mm       | IP08014044 |
| Zack marker strip ZB 3,5, consecutive numbers 41-50<br>Strip, white, snap into tall marker groove, for terminal width: 3.5 mm, lettering field: 3.5 x 10.5 mm       | IP08014045 |
| Zack marker strip ZB 3,5, consecutive numbers 51-60<br>Strip, white, snap into tall marker groove, for terminal width: 3.5 mm, lettering field: 3.5 x 10.5 mm       | IP08014046 |
| Zack marker strip ZB 3,5, consecutive numbers 61-70<br>Strip, white, snap into tall marker groove, for terminal width: 3.5 mm, lettering field: 3.5 x 10.5 mm       | IP08014047 |
| Zack marker strip ZB 3,5, consecutive numbers 71-80<br>Strip, white, snap into tall marker groove, for terminal width: 3.5 mm, lettering field: 3.5 x 10.5 mm       | IP08014048 |
| Zack marker strip ZB 3,5, consecutive numbers 81-90<br>Strip, white, snap into tall marker groove, for terminal width: 3.5 mm, lettering field: 3.5 x 10.5 mm       | IP08014049 |
| Zack marker strip ZB 3,5, consecutive numbers 91-100<br>Strip, white, snap into tall marker groove, for terminal width: 3.5 mm, lettering field: 3.5 x 10.5 mm      | IP0801404H |
| Zack marker strip flat ZBF 3,5, blank<br>Strip, white, snap into flat marker groove, for terminal width: 3.5 mm, lettering field: 3.5 x 5.2 mm                      | IP0829392  |
| Zack marker strip flat ZBF 3,5, consecutive numbers 1-10<br>Strip, white, snap into flat marker groove, for terminal width: 3.5 mm, lettering field: 3.5 x 5.2 mm   | IP08014061 |
| Zack marker strip flat ZBF 3,5, consecutive numbers 11-20<br>Strip, white, snap into flat marker groove, for terminal width: 3.5 mm, lettering field: 3.5 x 5.2 mm  | IP08014062 |
| Zack marker strip flat ZBF 3,5, consecutive numbers 21-30<br>Strip, white, snap into flat marker groove, for terminal width: 3.5 mm, lettering field: 3.5 x 5.2 mm  | IP08014063 |
| Zack marker strip flat ZBF 3,5, consecutive numbers 31-40<br>Strip, white, snap into flat marker groove, for terminal width: 3.5 mm, lettering field: 3.5 x 5.2 mm  | IP08014064 |
| Zack marker strip flat ZBF 3,5, consecutive numbers 41-50<br>Strip, white, snap into flat marker groove, for terminal width: 3.5 mm, lettering field: 3.5 x 5.2 mm  | IP08014065 |
| Zack marker strip flat ZBF 3,5, consecutive numbers 51-60<br>Strip, white, snap into flat marker groove, for terminal width: 3.5 mm, lettering field: 3.5 x 5.2 mm  | IP08014066 |
| Zack marker strip flat ZBF 3,5, consecutive numbers 61-70<br>Strip, white, snap into flat marker groove, for terminal width: 3.5 mm, lettering field: 3.5 x 5.2 mm  | IP08014067 |
| Zack marker strip flat ZBF 3,5, consecutive numbers 71-80<br>Strip, white, snap into flat marker groove, for terminal width: 3.5 mm, lettering field: 3.5 x 5.2 mm  | IP08014068 |
| Zack marker strip flat ZBF 3,5, consecutive numbers 81-90<br>Strip, white, snap into flat marker groove, for terminal width: 3.5 mm, lettering field: 3.5 x 5.2 mm  | IP08014069 |
| Zack marker strip flat ZBF 3,5, consecutive numbers 91-100<br>Strip, white, snap into flat marker groove, for terminal width: 3.5 mm, lettering field: 3.5 x 5.2 mm | IP0801406H |

## Artikeltabelle

| BEZEICHNUNG                                                                                                                                          | BEST.NR.  |
|------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| <b>Optionele toebehoren</b>                                                                                                                          |           |
| End cover D-PTS 1,5/S                                                                                                                                | IP3214576 |
| End cover, length: 50.7 mm, width: 2.2 mm, height: 37 mm, color: grey                                                                                |           |
| Plug-in bridge FBS 2-3,5                                                                                                                             | IP3213014 |
| Plug-in bridge, pitch: 3.5 mm, poles: 2, color: red                                                                                                  |           |
| Plug-in bridge FBS 3-3,5                                                                                                                             | IP3213027 |
| Plug-in bridge, pitch: 3.5 mm, poles: 3, color: red                                                                                                  |           |
| Plug-in bridge FBS 4-3,5                                                                                                                             | IP3213030 |
| Plug-in bridge, pitch: 3.5 mm, poles: 4, color: red                                                                                                  |           |
| Plug-in bridge FBS 5-3,5                                                                                                                             | IP3213043 |
| Plug-in bridge, pitch: 3.5 mm, poles: 5, color: red                                                                                                  |           |
| Plug-in bridge FBS 10-3,5                                                                                                                            | IP3213056 |
| Plug-in bridge, pitch: 3.5 mm, poles: 10, color: red                                                                                                 |           |
| Plug-in bridge FBS 20-3,5                                                                                                                            | IP3213069 |
| Plug-in bridge, pitch: 3.5 mm, poles: 20, color: red                                                                                                 |           |
| Plug-in bridge FBS 20-3,5                                                                                                                            | IP3213069 |
| Plug-in bridge, pitch: 3.5 mm, poles: 20, color: red                                                                                                 |           |
| Screwdriver 0.4 x 2.5 ( SZF 0-0.4X2.5)                                                                                                               | IP1204504 |
| Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.4 x 2.5 x 75 mm, 2-component grip, with non-slip grip |           |
| Test plug MPS-MT                                                                                                                                     | IP0201744 |
| Test plug, color: silver                                                                                                                             |           |
| Insulation sleeve MPS-IH RD                                                                                                                          | IP0201676 |
| Insulation sleeve, color: red                                                                                                                        |           |