

POWERTEC PF 25kA +H, T1 275, 3+1, pluggable, integr. fuse



Technische Daten


Schakeling	3+1
Max. continue spanning AC (VAC)	275VAC (L-PE)/ 305VAC (N-PE)
Bliksemstroomcapaciteit (kA)	25(L-N)/100(N-PE)
Nominale afleiderstroom (kA)	25(L-N)/100(N-PE)
Afleiderstroom max. (kA)	65(L-N)/150(N-PE)
Overspanningsbescherming (kV)	1900(L-PE)/1500(N-PE)
Modules	8
Hulpcontact	ja
Nominale spanning	240VAC
Kortsluitvastheid	100
Specifieke energie (kJ/Ω)	156,20
Lading (As)	12,5(L-N)/50(N-PE)
Aanspreektijd (ns)	<100
Overstroombeveiliging (max) (A gG)	nicht notwendig
$U_{t\</sub\>}$ (TOV tijdelijke overspanning) vastheid 120min (L-N) (V)	442
$U_{t\</sub\>}$ (TOV tijdelijke overspanning) vastheid 200ms (N-PE) (V)	1200
Onderbreekcapaciteit, volgstroom doofvermogen (A)	100
Open-circuit spanning gecombineerde stoot (1,2/50μs) (kV)	6

Technische Daten - Fortsetzung


Nominale ontladingsstroom (8/20 μ s) (kA)

3

Schema

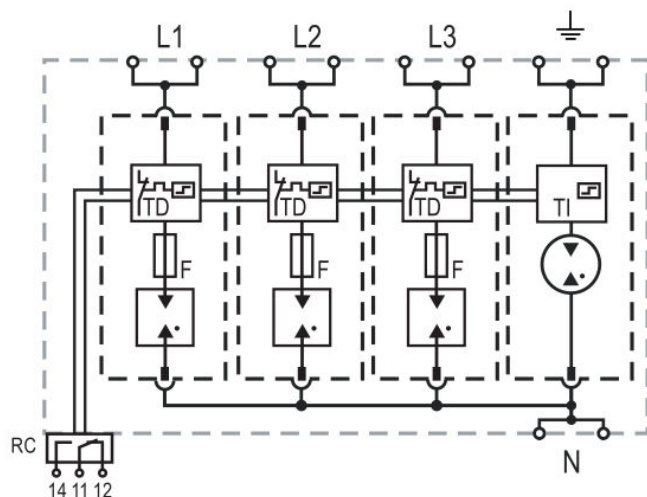

Afmetingen [mm/inch]

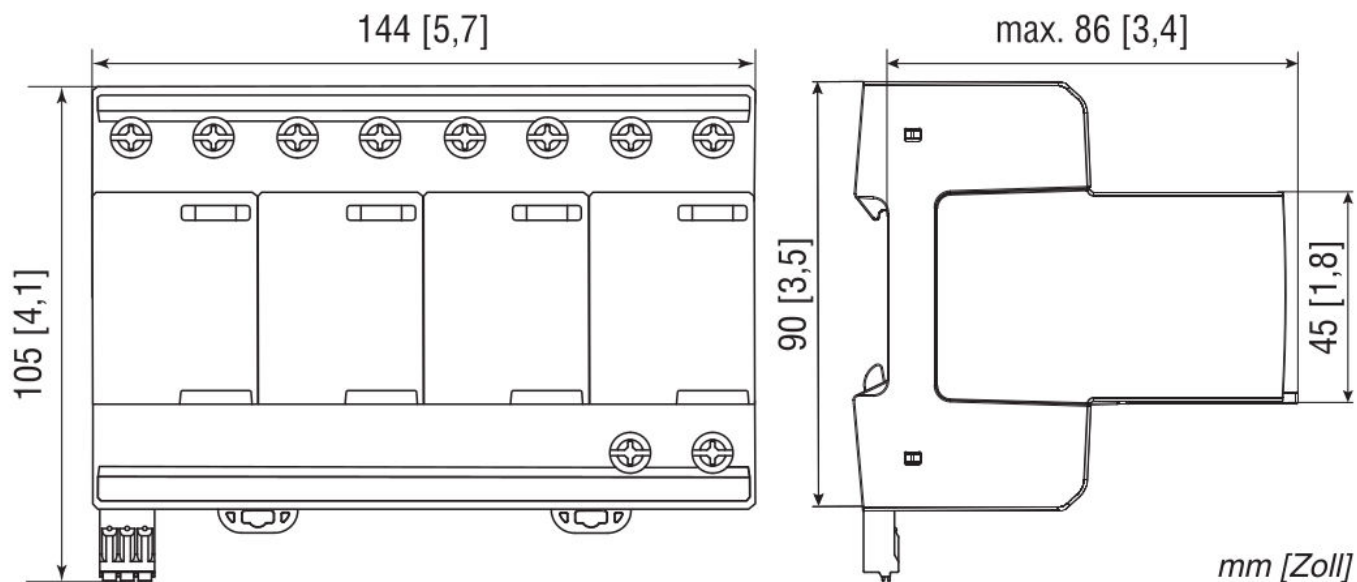

BEZEICHNUNG	BEST.NR.
POWERTEC PF 25kA +H, T1 275, 3+1, pluggable, integr. fuse	IS010131