

Datenblatt für Artikel: IUKTI6301A

Cooling unit 1500W, partially recessed mounting, Series DTI

400V, Installation depth=72mm, IP55, RAL 7035



SCHRACK-Info

General:

- Cooling unit for partially recessed mounting (=DTI)
- For door or side mounting
- Compact design for smaller enclosures or to cool hot spots
- Technical design with a standard controller
- Color: RAL 7035 (Light grey)


IUKTI6301:

- Cooling performance: 1500W
- Rated voltage: 400V
- Very high energy efficiency ratio (EER)
- Service friendly due to direct access to the PCB and the fans, thus 80 % shorter repair times
- Type of connection: Spring-type terminal included with plug
- Installation depth: 62mm
- Degree of protection IP55: Towards the enclosure
- Degree of protection IP34: Towards the surroundings


Technische Daten

Breedte (mm)	418,00
Hoogte (mm)	962,00
Diepte (mm)	244,00
Nettogewicht (kg)	45,00
Omgevingstemperatuur min. (°C)	15
Omgevingstemperatuur max. (°C)	55
Beschermingsgraad	IP55
Beschermingsklasse	I
Nominale spanning	400VAC
Product	Koeltoestel
Koelvermogen (W)	1500

Kennlinien Kühlleistung

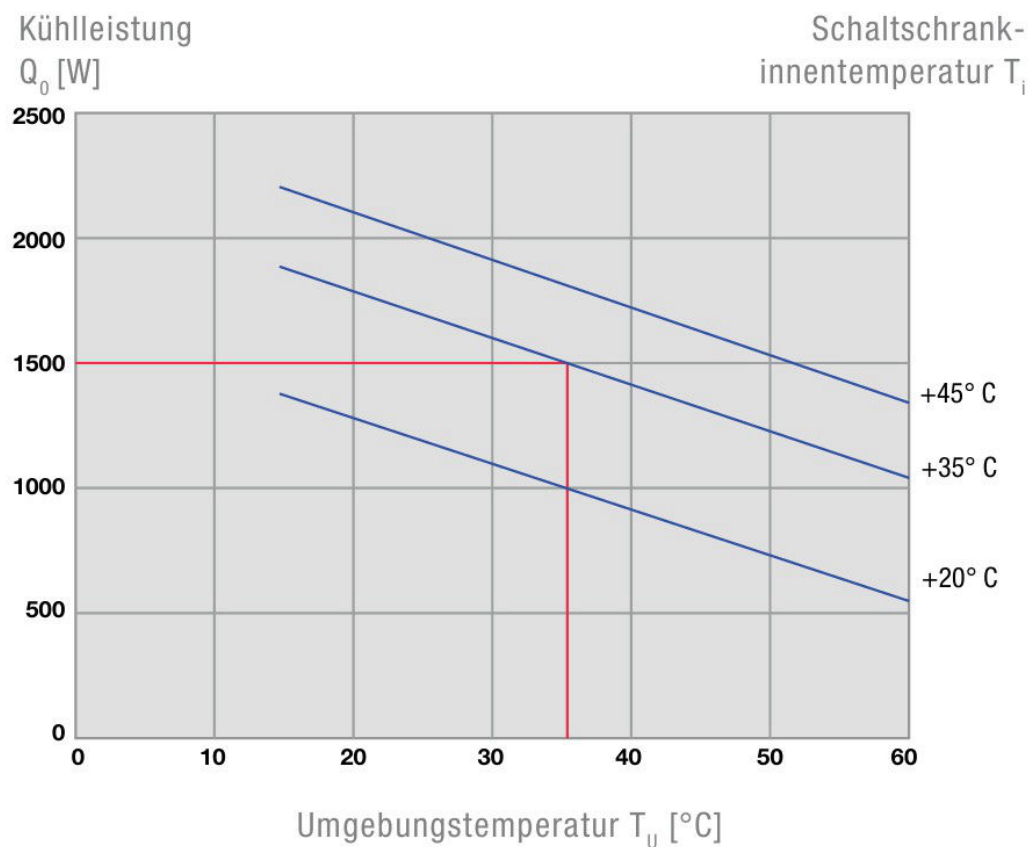

Dimensions and Cutout IUKTI6201A

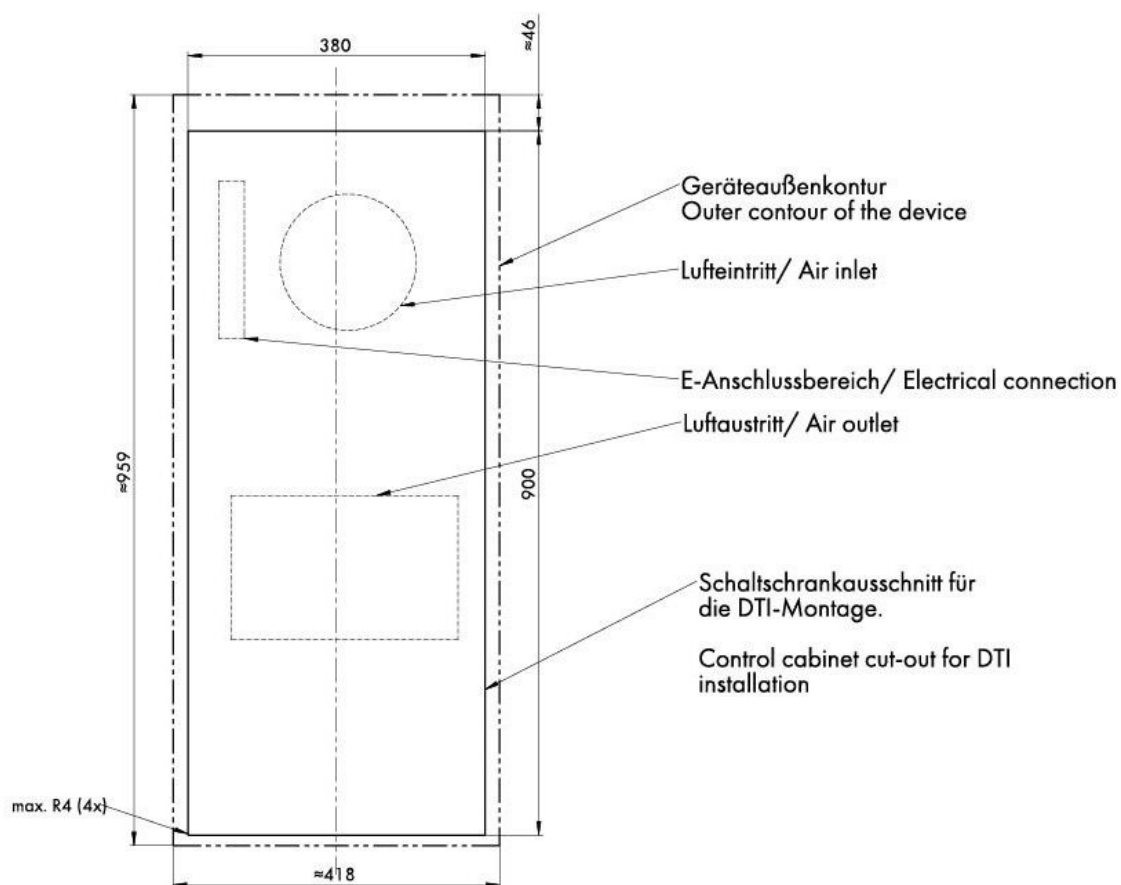

BEZEICHNUNG	BEST.NR.
Cooling unit 1500W, partially recessed mounting, Series DTI 400V, Installation depth=72mm, IP55, RAL 7035	IUKTI6301A