

Datenblatt für Artikel: KCOX201040

KCOX Kast INOX AISI304 1D

2000x1000x400mm montageplaat IP55

In INOX, met uitgangsfILTER en bescherming spatwater



SCHRACK-Info

- **Material :**
 - Frame: 1,5 mm stainless steel
 - Doors: 2 mm stainless steel
 - Rear panel: 1.5 mm stainless steel
 - Roof panel: 1.5 mm stainless steel
- **Mounting plate :** 3 mm galvanised sheet steel. Double folded, mounted in the enclosure, fully adjustable in depth in 25 mm increments with depth adjustment brackets ACMPD002. As insertion aid of the mounting plate we recommend the use of slide-in

rails ACCLT400 (for depth 400 mm). The slide-in rails are inserted in the floor, after sliding and fixing of the mounting plate they can be removed and reused in the next enclosure

- **Bottom plates** : 1 mm galvanised sheet steel, divided in two parts
- **Frame** : Folded and seam welded reversed open profile with 25 mm hole pattern according to DIN 43660. Including inside circumferential hole pattern
- **Door** : On single door enclosures, the door is mounted on four double-sided hinges allowing left- or right-hand opening. On double door enclosures, hinges are not reversible. Doors for left-hand opening have to be ordered separately. All door panels include the door mounting frame with 25 mm hole pattern. The left Z-wing is locked separately with an inner three-point lock
- **Lock** : Four-point rod lock with push-pull handle with spring adjustment and 5 mm DIN double-bit key lock (DDB), does not slide inward. The standard lock can be exchanged for profile half cylinder (DIN cylinder) and other inserts from the range of accessories. Double doors are designed with a left-side inner pivot lever
- **Rear panel** : Mounted with M6 torx screws. Replacement against additional door from the back side is possible. For 1600 mm wide enclosures the rear panel is divided
- **Roof panel** : Removable
- **Earthing** : All panels are earthed through their fittings and are equipped with a separate earthing stud
- **Degree of protection** : Single door and double door IP55
- **Impact resistance** : IK10
- **Finish** : Textured powder coating with UV protection
- **Color** : RAL7035 (Light grey)
- **Delivery includes** : Enclosure with door, rear panel, closed roof panel, bottom plates and mounting plate. Delivered on a pallet.


Technische Daten

Breedte (mm)	1.000,00
Hoogte (mm)	2.000,00
Diepte (mm)	400,00
Nettogewicht (kg)	225,00
Omgevingstemperatuur min. (°C)	-40
Omgevingstemperatuur max. (°C)	80
Beschermingsgraad	IP55
Beschermingsklasse	I
Uitvoering	INOX 1.4016 (AISI 430)
Kleur	RAL 7035
Breedte (mm)	1000
Hoogte (mm)	2000
Diepte (mm)	400
Kast plaatdikte (mm)	1
Montageplaat	Plaatstaal gegalvaniseerd
Montageplaat dikte (mm)	3
Montageplaat breedte (mm)	897
Montageplaat hoogte (mm)	1891
Deur dikte (mm)	2
Bodemplaten aantal	2
Draagvermogen per deur (kg)	100
Aantal deuren	1

Technische Daten - Fortsetzung

Breedte bodemplaat (mm)	857
Dikte dakplaat (mm)	1,50
Dikte rugwand (mm)	1,50
Corrosieklasse	C3-M
Product	Compact kast
Draagvermogen montageplaat (kg)	700
Stroomwarmteverliezen (W)	-756,00

**Maattekening: KCOX Kast INOX AISI304 1D 2000x1000x400mm
montageplaat IP55**

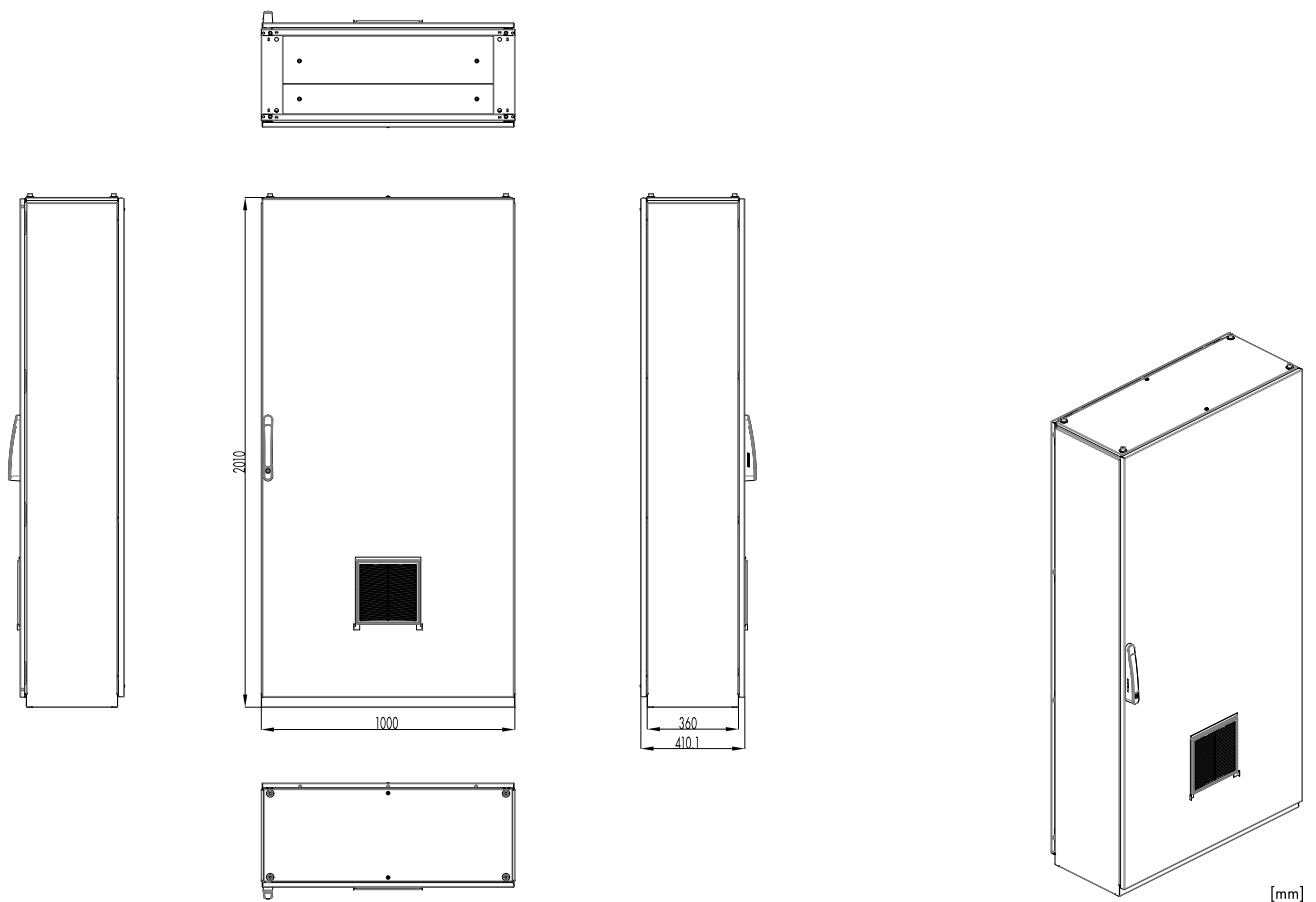

Artikeltabelle

BEZEICHNUNG	BEST.NR.
KCOX Kast INOX AISI304 1D 2000x1000x400mm montageplaat IP55 In INOX, met uitgangsfILTER en bescherming spatwater	KCOX201040
Optionele toebehoren	
KC Sokkelplaten breedte (set 2stk.) BxH 1000x100mm RAL7046 Set 2 panelen voor en achter	KCSOBX1001
KC Sokkel dieptedelen en hoeken DxH 400x100mm RAL7046 Levering set 2 platen en hoeken gemonteerd	KCSOTX0401
KC Regendak aluminium ventilator 540m ³ /h BxD 1000x400mm Aluminium RAL7035, in functie van breedte en diepte van de kast te bestellen	KCRC1040F
KC Regendak aluminium uitgangsfILTER BxD 1000x400mm Aluminium RAL7035, in functie van breedte en diepte van de kast te bestellen	KCRC1040E
Glijrails voor plaatsing montageplaat kast 400mm (set 2stk.)	ACCLT400
AC Hijsogen verzinkt M12 (set 4stk.)	ACLE9301
AC Handgreep verend zonder sluiting zwart without insert	ACLSC502
AC/ KC Adaptermodule voor plaatsing halfcilinderslot	ASLS2100
AC/ KC Afdekking drukknopinsert handgreep	ASLSS1537
AC Kooimoer universeel M6 (10stk.)	ACCNM615
AC Schroeven M6x16mm ISO7380 (10stk.)	ACCNK006
AC Kooimoer universeel M8 (10stk.)	ACCNM815
AC Schroeven M8x16mm ISO7380 (10stk.)	ACCNK008
Sleutel dubbelbaard 5mm	DV903532