


Datenblatt für Artikel: LI1003773-

NUMINOS S DL 8,6W 720lm 2700K 40° 250mA LED zwart/wit

Recessed ceiling luminaire, cardanic rotating and pivoting, Note: LED driver must be ordered separately!

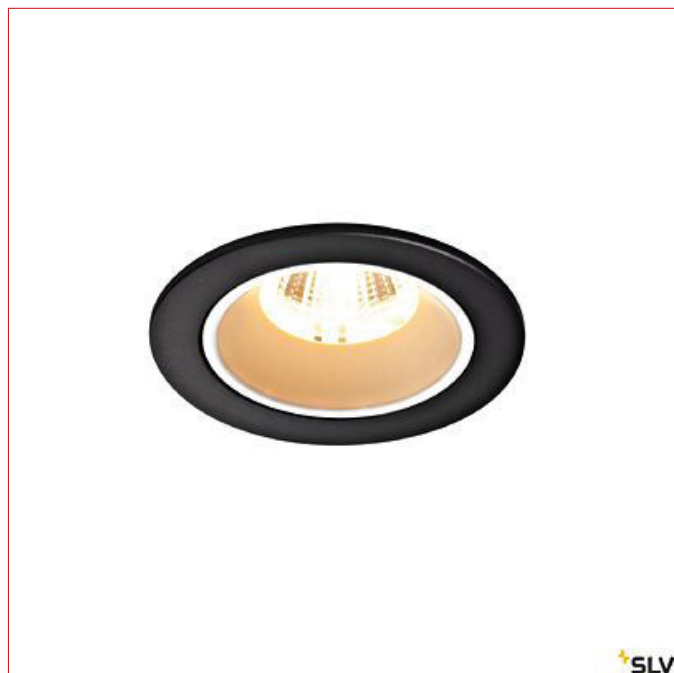

Produktinfo

NUMINOS is the optimal coordinated lighting system from SLV, combining function, design and technology. So you can experience thousands of lighting possibilities with different down- and spotlights. Like with the NUMINOS® DL S recessed ceiling light, which is distinguished by its high-quality processing- and light quality. Ideal for a discreet, modern and space-saving lighting, which directs the focus on objects or the room. The recessed ceiling light can be powered with a power consumption of 8.6 Watt, light output of 720 Lumens, color temperature of 2700 Kelvin and a high color rendering index of over 90. The installation is designed to be turned by hand. When do you decide for NUMINOS from SLV – the modular variety awaits you.

Technische Daten

Lichtstroom (lm)	720
Lichtkleur	Comfort warmwit
Kleurtemperatuur (K)	2700
Kleurweergave-index (Ra)	≥90
Levensduur	50.000h
Regelen lichtintensiteit	Afhankelijk van driver Ja

Technische Daten - Fortsetzung

Beschermingsklasse	III
Beschermingsgraad	IP20
Type verlichting	Inbouw plafondverlichting
Lichtmiddel inbegrepen	Inbegrepen
Lampvoet	LED
Stralingshoek (°)	120
Vermogen (W)	8,60
Bedrijfsstroom mA (mA)	250
Boring voor inbouw (mm)	Ø 68
Inbouw diepte (mm)	55
Afwerking	Wit Zwart
Uitvoering	Aluminium Polycarbonaat
Lengte (mm)	80
Breedte (mm)	80
Hoogte (mm)	52
Diameter (mm)	80
Optionele toebehoren	LI1004055-;LI1004058-;LI1004067-;LI1004786-;LI1004787-;LI1004788-;LI1004789-;LI1006135-;LI1006136-;LI1006137-;LI1006138-
LxBxH (mm)	80x80x52
ØxH (mm)	80x52
Uitsnijding (mm)	Ø 68

Artikeltabelle

BEZEICHNUNG	BEST.NR.
NUMINOS S DL 8,6W 720lm 2700K 40° 250mA LED zwart/wit	LI1003773
Recessed ceiling luminaire, cardanic rotating and pivoting, Note: LED driver must be ordered separately!	
Optionele toebehoren	
LED Driver 65-10W 250mA PHASE	LI1004055
LED Driver	
LED Treiber, 10W 250mA	LI1004058
LED Driver	
LED Driver 12-20W 250/350/500/700mA DALI	LI1004067
LED Driver	
NUMINOS S Diffusor Ellipse	LI1004786

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Optionele toebehoren	
NUMINOS S Diffusor Prisma W LED IP20 transparant	LI1004787
NUMINOS S Diffusor Frosted W LED IP20 frosted	LI1004788
NUMINOS S Diffusor Wabe W LED IP20 zwart	LI1004789
Numinos® XS montage frame, rond 160/70mm zwart Mounting frame/socket	LI1006135
Numinos® XS montage frame, rond 160/70mm wit Mounting frame/socket	LI1006136
Numinos® XS montage frame, vierk. 160/70mm zwart Mounting frame/socket	LI1006137
Numinos® XS montage frame, vierk. 160/70mm wit Mounting frame/socket	LI1006138