


Datenblatt für Artikel: LI1009820-

# NUMINOS MOVE L Deckeneinbaul. 2700K

## 20° IP20 rund ws

recessed ceiling light

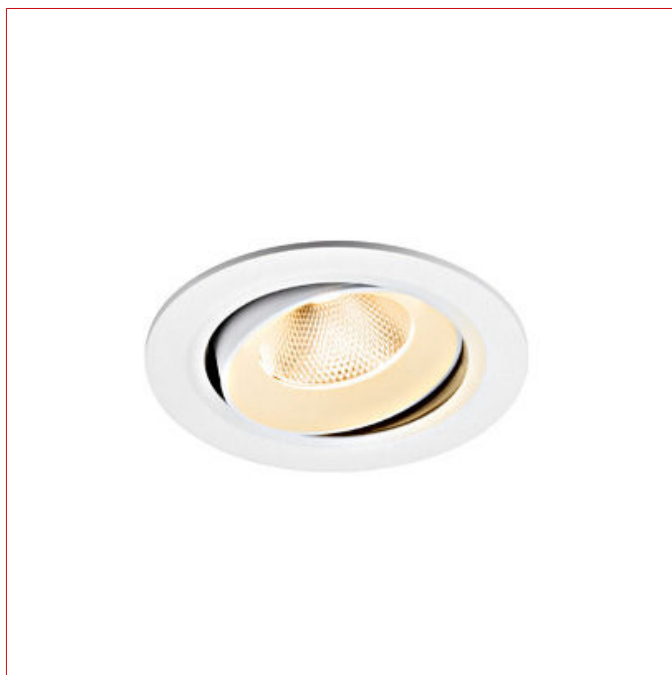

### Technische Daten

|                          |           |
|--------------------------|-----------|
| Netto lengte (mm)        | 160,00    |
| Breedte (mm)             | 160,00    |
| Hoogte (mm)              | 93,00     |
| Netto diameter (mm)      | 160,00    |
| Nettogewicht (kg)        | 0,51      |
| Kleur                    | Wit       |
| Uitvoering               | Aluminium |
| Stralingshoek (°)        | 20        |
| Verblindingsfactor (UGR) | 19        |
| Vermogen (W)             | 17        |
| Kleurtemperatuur (K)     | 2700      |
| Kleurweergave-index (Ra) | 90        |
| Lichtstroom (lm)         | 2400      |
| Levensduur               | 50000     |
| Beschermingsklasse       | III       |
| Beschermingsgraad        | IP20      |
| ØxH (mm)                 | 160x93    |

## Technische Daten - Fortsetzung

LxBxH (mm)

| 160x160x93

| BEZEICHNUNG                                                                    | BEST.NR.  |
|--------------------------------------------------------------------------------|-----------|
| NUMINOS MOVE L Deckeneinbaul. 2700K 20° IP20 rund ws<br>recessed ceiling light | LI1009820 |