

Datenblatt für Artikel: LI115231--

COB LED MODULE, silver-grey, 12°, CRI90+, 4200K

for AIXLIGHT PRO installation frame




Technische Daten

Net height (mm)	130,00
Net diameter (mm)	135,00
Net weight (kg)	0,51
Mounting	recessed mounting ceiling
Colour	Silver grey Black
Material	Aluminum Glass
Manufacturer	03-SLV
Operation current mA (mA)	700
Colour temperature (K)	4200
Colour rendering index (Ra)	90
Luminous flux (lm)	1950
Live time	30.000h
Protection class	III
Energy efficiency class	A++ A+ A
Illuminant incl.	yes

Technische Daten - Fortsetzung

Diameter (mm)	135
ØxH mm	135x130

Dimensioned drawing: COB LED MODULE, silver-grey, 12°, CRI90+, 4200K

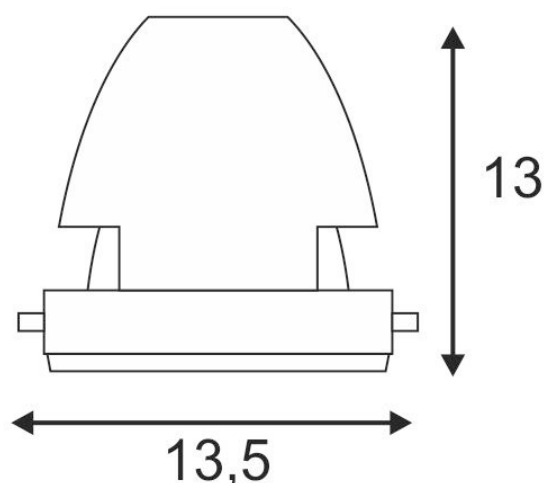

Artikeltabelle

BEZEICHNUNG	BEST.NR.
COB LED MODULE, silver-grey, 12°, CRI90+, 4200K for AIXLIGHT PRO installation frame	LI115231
Optional Accessories	
LED Driver 36W, 700mA, dimmable	LI1001267
Structure glass for AIXLIGHT PRO fitting housing	LI115170
AIXLIGHT PRO ZIERRING, aluminium, white	LI115600
TCI LED-Driver 50VA, 350-1050mA Dip-Switch, DALI- dimmable inkl. Cable relief	LI464032
LED-Driver, 40W, 700mA, incl. strain relief	LI464168
LED-Driver, 40W, 700mA, incl. strain relief, dimmable	LI464174
LED Driver 36W, 700mA, dimmable	LI464803