

Datenblatt für Artikel: LI115900--

ILU, Spot, LED 50mm, 3000K, black, 350mA, 1.2W




Technische Daten

Net height (mm)	91,00
Net diameter (mm)	60,00
Net weight (kg)	0,10
Cut-out size (mm)	Ø50
Mounting	recessed mounting ceiling
Colour	Black
Material	Aluminum Plastic
Manufacturer	03-SLV
Operation current mA (mA)	350
Watt (W)	1,20
System efficiency (lm/W)	46
Colour temperature (K)	3000
Colour rendering index (Ra)	80
Luminous flux (lm)	55
Live time	25.000h
Protection class	III
Energy efficiency class	A++ A+ A

Technische Daten - Fortsetzung

Mounting depth (mm)	65
Illuminant incl.	yes
Diameter (mm)	60
ØxH mm	60x91
Cut-out size mm	Ø50

Dimensioned drawing: ILU, Spot, LED 50mm, 3000K, black, 350mA, 1.2W

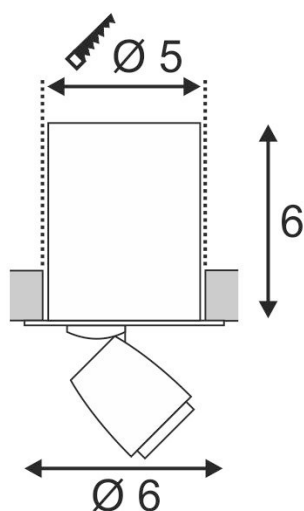

Artikeltabelle

BEZEICHNUNG	BEST.NR.
ILU, Spot, LED 50mm, 3000K, black, 350mA, 1.2W	LI115900
Optional Accessories	
Plug connector x3 with two bridges for LED, max. 350mA	LI111850
LED-DRIVER, 3VA, 350mA, with AMP plug, incl. stress relief	LI464107