

Datenblatt für Artikel: LI158419--

HELIA 45, pendant, LED, 3000K, round, brushed copper, 9W


flat canopy



Technische Daten

Pendant length (mm)	1500
Mounting	recessed mounting ceiling
Colour	Copper brushed
Material	Aluminum
Manufacturer	03-SLV
Watt (W)	9
System efficiency (lm/W)	80
Colour temperature (K)	3000
Colour rendering index (Ra)	90
Luminous flux (lm)	720
Live time	30.000h
Protection class	III
Energy efficiency class	A++ A+ A
Mounting depth (mm)	20
Illuminant incl.	yes

Dimensioned drawing: HELIA 45, pendant, LED, 3000K, round, brushed copper, 9W

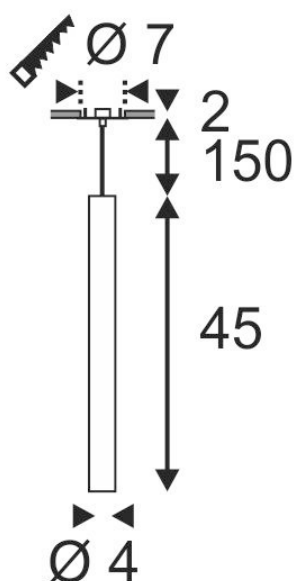

Artikeltabelle

BEZEICHNUNG	BEST.NR.
HELIA 45, pendant, LED, 3000K, round, brushed copper, 9W	LI158419
flat canopy	
Optional Accessories	
SMART LIGHT SWITCH BOX, TRIAC Dim	LI420012
LED-DRIVER, 9VA, 500mA, incl. stress relief	LI464091
LED DRIVER 15W, dimmable, 500mA, incl. stress relief	LI464144