


Datenblatt für Artikel: LI158743--

I-VIDUAL, 3000K, silver-grey, L/W 59.5/59.5 cm

LED panel for grid ceilings

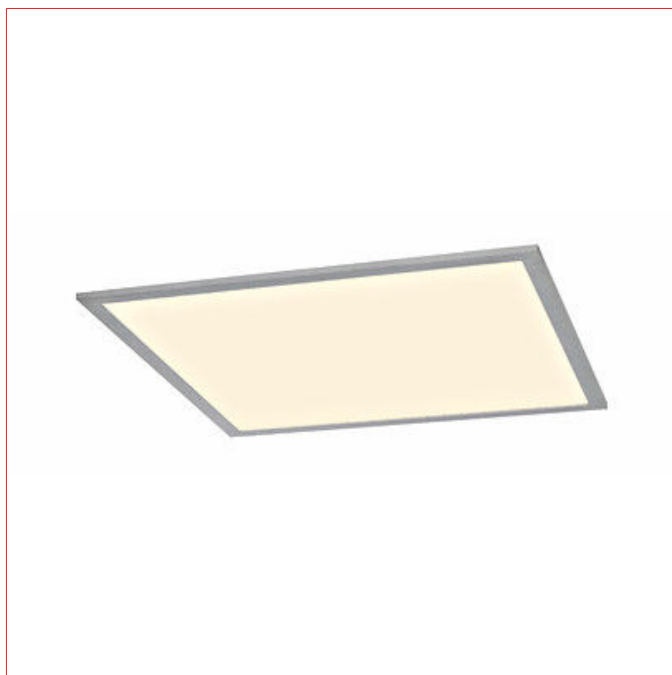


Technische Daten

Net length (mm)	595,00
Net width (mm)	595,00
Net height (mm)	13,00
Net weight (kg)	3,96
Mounting	recessed mounting ceiling
Colour	Silver grey
Material	Aluminum Acrylic
Manufacturer	03-SLV
Operation current mA (mA)	1050
Colour temperature (K)	3000
Colour rendering index (Ra)	80
Luminous flux (lm)	3250
Live time	30.000h
Protection class	III
Energy efficiency class	A++ A+ A
Mounting depth (mm)	50

Technische Daten - Fortsetzung

Illuminant incl.	yes
LxWxH mm	595x595x13

Dimensioned drawing: I-VIDUAL, 3000K, silver-grey, L/W 59.5/59.5 cm

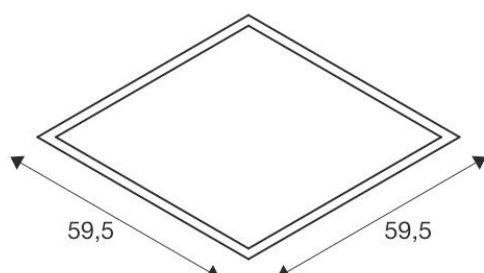

Artikeltabelle

BEZEICHNUNG	BEST.NR.
I-VIDUAL, 3000K, silver-grey, L/W 59.5/59.5 cm	LI158743
LED panel for grid ceilings	
Optional Accessories	
Universal-frame for LED-Panel, 595x595mm, white	LI158762
INSTALLATION FRAME, silver-grey, L/W 60.5/60.5 cm	LI158764
for I-VIDUAL LED panel	
rosette, 10,3cm x 22cm x 5,1cm, matt white	LI158791
Suspension set for LED Panel	LI158799
TCI LED-Driver 50VA, 350-1050mA Dip-Switch, DALI- dimmable	LI464032
inkl. Cable relief	
LED-Driver, 40W, 1000mA, incl. strain relief	LI464170
LED-Driver, 40W, 1000mA, incl. strain relief, dimmable	LI464176