


Datenblatt für Artikel: LI162793--

SENDER LED recessed PANEL, 6W, 3000K, angular, silvergrey

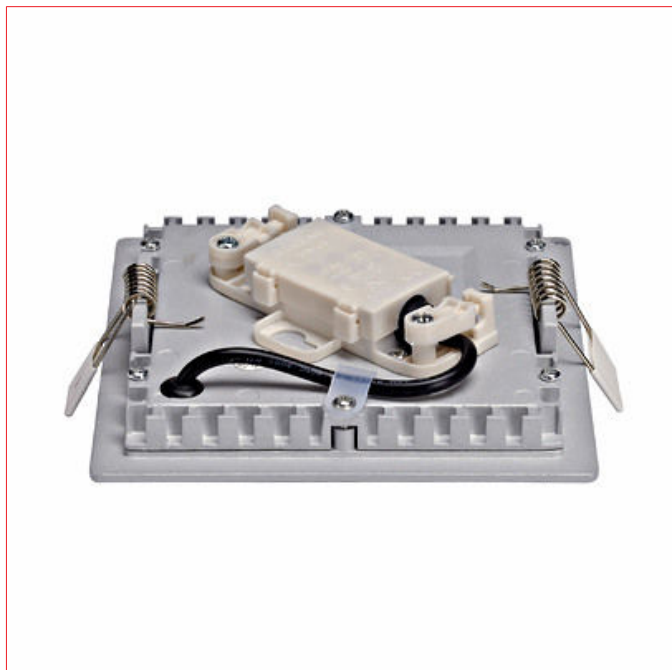

Technische Daten

Net length (mm)	120,00
Net width (mm)	120,00
Net height (mm)	30,00
Net weight (kg)	0,28
Cut-out size (mm)	112x112
Luminaire type	Recessed ceiling luminaire
Mounting	recessed mounting ceiling
Colour	Silver grey
Material	Aluminum
Manufacturer	03-SLV
Emission angle (°)	120
Controller	without LED Driver
Input current (A)	0,35
Light source	SMD LED
Lamp holder	LED Platine
Watt (W)	6
System efficiency (lm/W)	40
Light colour	warm white

Technische Daten - Fortsetzung

Colour temperature (K)	3000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	240
Number of lamps	1
Live time	30.000h
Protection class	III
Energy efficiency class	A++ A+ A
Mounting depth (mm)	40
Illuminant incl.	yes
LxWxH mm	120x120x30
Cut-out size mm	112x112

Artikeltabelle

BEZEICHNUNG	BEST.NR.
SENDER LED recessed PANEL, 6W, 3000K, angular, silvergrey	LI162793
Optional Accessories	
LED DRIVER 10W, dimmable, 350mA, incl. stress relief	LI464140