


Data Sheet for Article: LI29001080

Led Panel 42W, 3600lm, 830, M600, 1050mA, excl. Driver



Light distribution curve




Technical Data

Mounting	recessed mounting ceiling
Colour	White
Material	Plastic Metal
Cover	mikroprismatic
Manufacturer	O2-Schrack
Emission angle (°)	90
Glare factor (UGR)	<19
Operating voltage DC (V)	30-42
Operation current mA (mA)	1050
Light source	SMD LED
Lamp holder	LED Platine

Technical Data - continued

Watt (W)	42
System efficiency (lm/W)	86
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥85
Luminous flux (lm)	3600
Live time (h)	50000
Dimmable	no
IP Rating	IP20
LxWxH mm	597x597x9

Dimensioned drawing: Led Panel 42W, 3600lm, 830, M600, 1050mA, excl. Driver

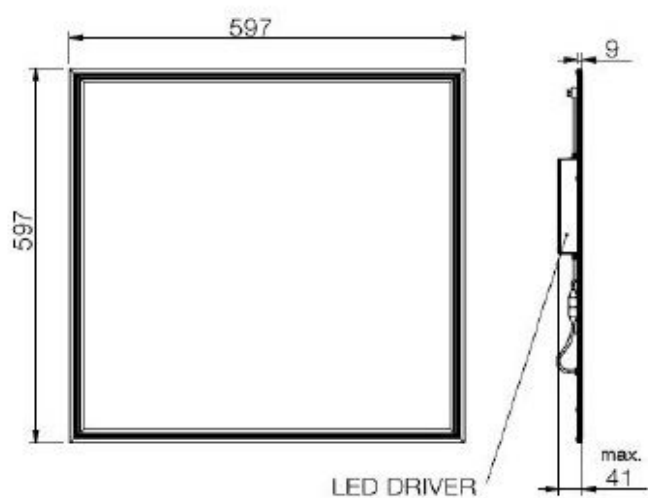

Article Table

DESCRIPTION	Order No.
Led Panel 42W, 3600lm, 830, M600, 1050mA, excl. Driver	LI29001080
Optional Accessories	
Led Driver 47W, 100-240V CC 1050mA 30-42V DC	LI19001000
Led Driver 46W, 220-240V CC 1050mA 21-48V DC Dali	LI29001075
Led Driver 47W, 220-240V CC 1050mA 4-48V DC 1-10V	LI29001076
Led Panel Surface Mounting Kit for M600 Serie Ledon	LI29001062
Led Panel Wall Bracket for Surface Mounting Kit Serie Ledon	LI29001097
Led Panel Flush Mounting Kit for M600 Serie Ledon	LI29001063
Led Panel Suspension Kit 4x1M, Serie Ledon	LI29001064
Led Panel Suspension Kit 4x2M, Serie Ledon	LI29001096
Led Backlight 120 800lm, 110°, 840, 1050mA	LI29001142
3-way connection box, IP20, Quick Fix	LID15379