

Datenblatt für Artikel: LI43920134

LED-Lamp RL-T8 58 24W 830 2550lm G13

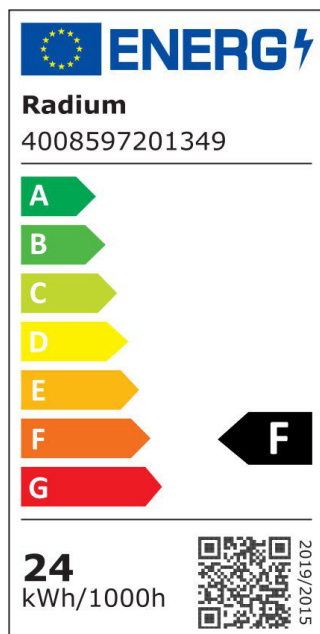
190° mat UN 1500mm

LED retrofit tube for 230V direct connection, operation with a magnetic ballast or suitable ECG; including starter



Technische Daten

Omgevingstemperatuur min. (°C)	-20
Omgevingstemperatuur max. (°C)	45
Lichtstroom (lm)	2550
Kleurtemperatuur (K)	3000
Kleurweergave-index (Ra)	≥80
Regelen lichtintensiteit	Neen
Energielabels 01.09.2021	F
Lampvoet	G13
Stralingshoek (°)	190
Nominale werkspanning AC (V)	230
Afwerking	Opaal
Uitvoering	Glas
Bouwworm	Buisvorm
Lengte (mm)	1500
Diameter (mm)	28

**Energie effizienzienklasse: LED-Lamp RL-T8 58 24W 830 2550lm G13 190° mat
UN 1500mm**

BEZEICHNUNG	BEST.NR.
LED-Lamp RL-T8 58 24W 830 2550lm G13 190° mat UN 1500mm LED retrofit tube for 230V direct connection, operation with a magnetic ballast or suitable ECG; including starter	LI43920134