



Datenblatt für Artikel: LI99001719

CAPRI LED SYM 100W 13500lm, 5000K, Ra>70, IP65, black

LED Floodlight, symmetric, 110°

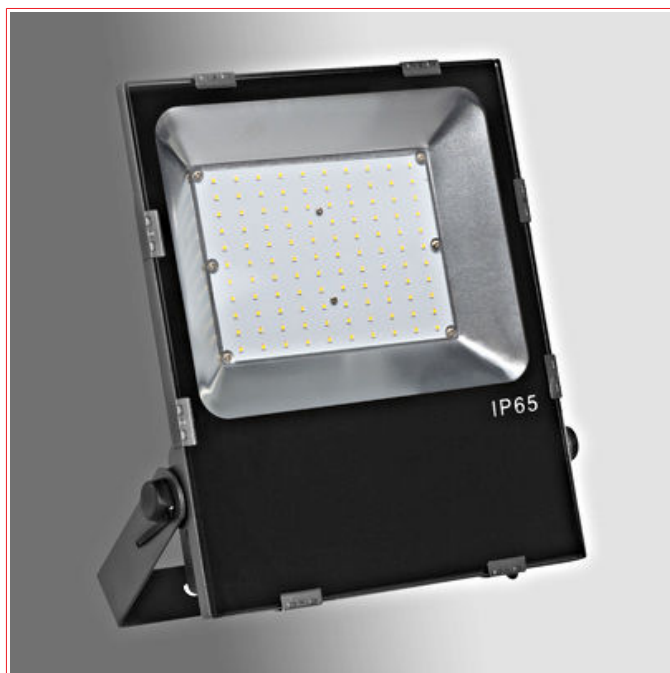

Light distribution curve



Technische Daten

Net length (mm)	325,00
Net width (mm)	60,00
Net height (mm)	380,00
Net weight (kg)	4,60
Luminaire type	Floodlight
Mounting	surface mounting ceiling surface mounting wall floor mounting

Technische Daten - Fortsetzung

Colour	Black
Material	Hardened glass Die-cast aluminum
Cover	Clear
Manufacturer	01-Schrack-Trinity
Operating voltage AC (V)	220 - 240
Light source	LED
Lamp holder	LED Platine
Watt (W)	100
Light colour	cool white
Colour temperature (K)	5000
Colour rendering index (Ra)	>70
Luminous flux (lm)	13050
Live time	50.000h / L70 / B50
Dimmable	no
Protection class	I
IP Rating	IP65
Energy efficiency class	A A++ A+
Shock strength	IK08
Illuminant incl.	yes
Temperature range - Operation (°C)	-30 to +35
LxWxH mm	325x60x380

Artikeltabelle

BEZEICHNUNG	BEST.NR.
CAPRI LED SYM 100W 13500lm, 5000K, Ra>70, IP65, black LED Floodlight, symmetric, 110°	LI99001719