


Data Sheet for Article: LID10226--

# Sutil-R LED 12W 6000K 827lm, IP40, grey

Recessed downlight, complete with driver

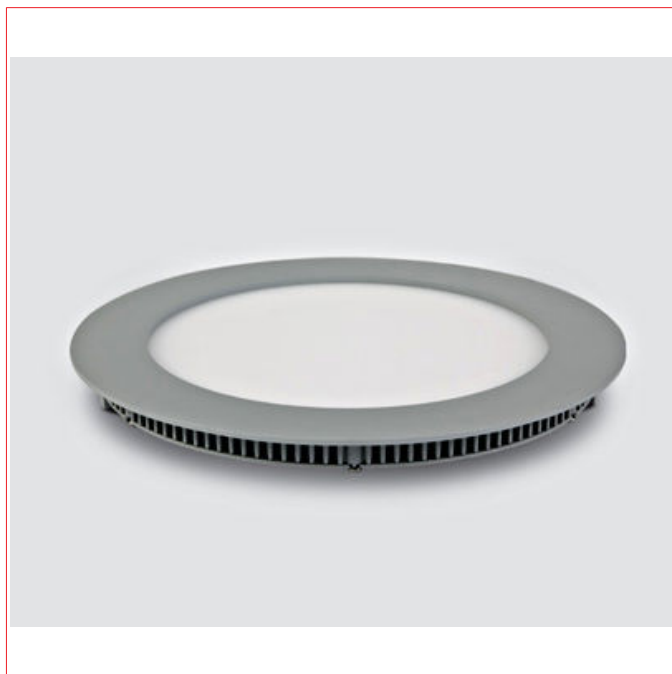

## Technical Data

|                             |                                    |
|-----------------------------|------------------------------------|
| Luminaire type              | Recessed ceiling luminaire         |
| Mounting                    | recessed mounting ceiling          |
| Colour                      | Gray                               |
| Material                    | Aluminum                           |
| Manufacturer                | 06-One Light                       |
| Emission angle (°)          | 120                                |
| Operating voltage AC (V)    | 100-240                            |
| Light source                | SMD LED                            |
| Lamp holder                 | LED Platine                        |
| Watt (W)                    | 12                                 |
| Light colour                | daylight                           |
| Colour temperature (K)      | 6000                               |
| Colour rendering index (Ra) | ≥80                                |
| Luminous flux (lm)          | 827                                |
| Number of lamps             | 1                                  |
| Dimmable                    | yes with optional, dimmable driver |
| Protection class            | II                                 |
| IP Rating                   | IP40                               |
| Mounting depth (mm)         | 40                                 |

## Technical Data - continued

ØxH mm

178x20

## Article Table

| DESCRIPTION                                                                                          | Order No. |
|------------------------------------------------------------------------------------------------------|-----------|
| Sutil-R LED 12W 6000K 827lm, IP40, grey<br>Recessed downlight, complete with driver                  | LID10226  |
| <b>Optional Accessories</b>                                                                          |           |
| 89045L LED DRIVER DALI, Push, 1-10V, output 350-1100mA, 230V<br>Adjustable output using DIP switches | LID14224  |
| LED Driver, 1-10V & Push to dimm, 250-700mA 12-24V DC 8-16W                                          | LID13671  |
| 89045L LED DRIVER DALI, Push, 1-10V, output 350-1100mA, 230V<br>Adjustable output using DIP switches | LID14224  |