


Datenblatt für Artikel: LID12981 --

Lumo Round LED downlight, 24W, 3000K, 1400lm, IP44, white **ECONOMY**



Light distribution curve




Technische Daten

Cut-out size (mm)	Ø210
Luminaire type	Recessed ceiling luminaire Recessed wall luminaire
Mounting	recessed wall mounting recessed mounting ceiling
Colour	White
Material	Aluminum
Cover	mat
Manufacturer	O6-One Light

Technische Daten - Fortsetzung

Emission angle (°)	120
Controller	LED driver
Operating voltage AC (V)	100-240
Input voltage AC (V)	100-240
Output voltage AC (V)	12-30
Output current (A)	0,35
Light source	SMD LED
Lamp holder	LED Platine
Watt (W)	24
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	1400
Number of lamps	1
Live time	30000
Dimmable	yes
Protection class	II
IP Rating	IP44
Energy efficiency class	A
Mounting depth (mm)	40
Illuminant incl.	yes
ØxH mm	238x151
Cut-out size mm	Ø210

Dimensioned drawing: Lumo Round LED downlight, 24W, 3000K, 1400lm, IP44, white

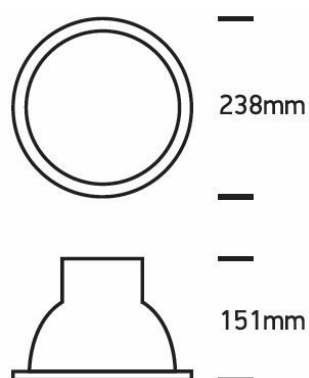

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Lumo Round LED downlight, 24W, 3000K, 1400lm, IP44, white	LID12981