



Data Sheet for Article: LID13843--

Sutil Round2 LED 3W, 3000K, 180lm, 120°, IP40, grey **ECONOMY**

Recessed downlight, complete with driver

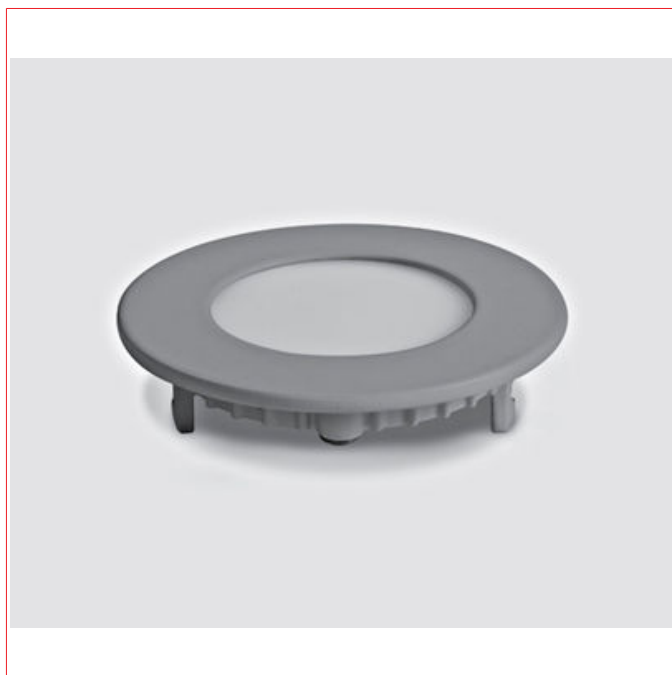

Technical Data

Cut-out size (mm)	Ø70
Luminaire type	LED Panel
Mounting	recessed mounting ceiling
Colour	Gray
Material	Aluminum
Manufacturer	One Light
Emission angle (°)	120
Controller	LED driver
Operating voltage AC (V)	230
Light source	SMD LED
Lamp holder	LED Platine
Watt (W)	3
Light colour	warm white
Colour temperature (K)	3000

Technical Data - continued

Colour rendering index (Ra)	≥80
Luminous flux (lm)	180
Number of lamps	1
Dimmable	no
Protection class	II
IP Rating	IP40
Energy efficiency class	A
Illuminant incl.	yes
ØxH mm	85x22
Cut-out size mm	Ø70
System efficiency (lm/W)	60
Diameter (mm)	85

Article Table

DESCRIPTION	Order No.
Sutil Round2 LED 3W, 3000K, 180lm, 120°, IP40, grey Recessed downlight, complete with driver	LID13843
Optional Accessories	
89045L LED DRIVER DALI, Push, 1-10V, output 350-1100mA, 230V Adjustable output using DIP switches	LID14224
LED Driver, 1-10V & Push to dimm, 250-700mA 12-24V DC 8-16W	LID13671
89045L LED DRIVER DALI, Push, 1-10V, output 350-1100mA, 230V Adjustable output using DIP switches	LID14224