


Datenblatt für Artikel: LID17291--

# Kor-L 40W 3600-4000lm 3000-5700K CRI80 UGR19 IP20 230V zwart

complete with 1000mA driver; 14 PLAFO

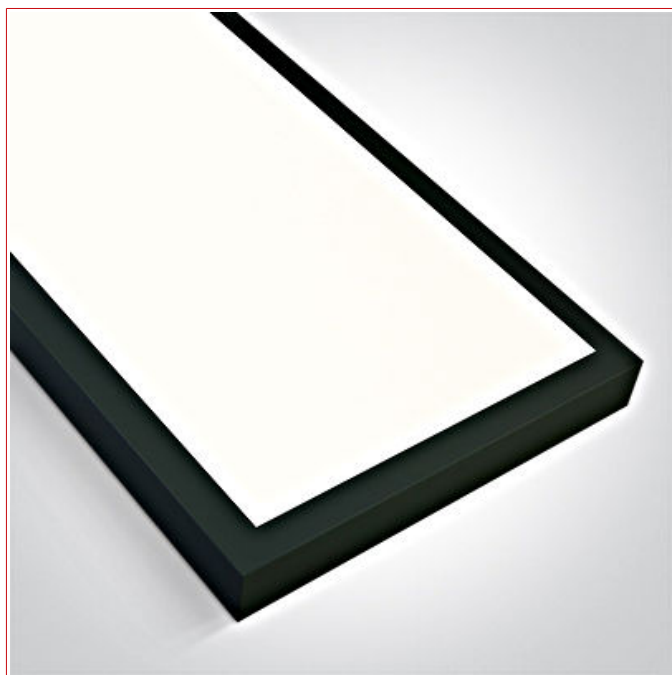

## Produktinfo

30x120cm adjustable CCT surface mounted backlit LED panel with microprismatic diffuser. Uniform lighting, ideal for commercial applications. Complete with 1000mA driver. Complies with standard EN60598-1 and any other specific standards.

## Technische Daten

|                          |                                |
|--------------------------|--------------------------------|
| Lichtstroom (lm)         | 3600/4000/3800                 |
| Lichtkleur               | Koudwit<br>Warmwit<br>Daglicht |
| Kleurtemperatuur (K)     | 3000;4000;5700                 |
| Kleurweergave-index (Ra) | ≥80                            |
| Verblindingsfactor (UGR) | <19                            |
| Levensduur               | 50.000h                        |
| Regelen lichtintensiteit | Neen                           |
| Beschermingsklasse       | II                             |
| Beschermingsgraad        | IP20                           |
| Lichtmiddel inbegrepen   | Inbegrepen                     |

## Technische Daten - Fortsetzung

|                              |                |
|------------------------------|----------------|
| Lampvoet                     | LED            |
| Lichtrendement (lm/W)        | 90             |
| Vermogen (W)                 | 40             |
| Voedingen                    | LED Driver     |
| Nominale werkspanning AC (V) | 220-240        |
| Ingangsspanning AC (V)       | 220-240        |
| Bedrijfsstroom mA (mA)       | 1000           |
| Frequentie (Hz)              | 50/60          |
| Bevestiging                  | Plafondmontage |
| Afwerking                    | Zwart          |
| Uitvoering                   | Aluminium      |
|                              | Staal          |
| Lengte (mm)                  | 1200           |
| Breedte (mm)                 | 300            |
| Hoogte (mm)                  | 42             |
| Optionele toebehoren         | LID 16949--    |
| LxBxH (mm)                   | 1200x300x42    |

## Artikeltabelle

| BEZEICHNUNG                                                                                           | BEST.NR. |
|-------------------------------------------------------------------------------------------------------|----------|
| Kor-L 40W 3600-4000lm 3000-5700K CRI80 UGR19 IP20 230V zwart<br>complete with 1000mA driver; 14 PLAFO | LID17291 |
| <b>Optionele toebehoren</b>                                                                           |          |
| Schroefloze klem 32A 6-aansluitingen<br>26 ACCES&GADGETS                                              | LID16949 |