

Datenblatt für Artikel: LID17438--

Sutil Round2 LED 8W 640lm 3K/4K/5,7K IP20 230V 120° wit

Recessed downlight, Compleet met driver



Produktinfo

CCT Variable 8W slim downlight LED, IP20, ideal for commercial applications such as offices, galleries and showrooms. Supplied with 200mA non-dimmable LED driver. Complies with standard EN60598-1 and any other specific standards.


Technische Daten

Hoogte (mm)	22,00
Netto diameter (mm)	120,00
Type verlichting	Inbouw plafondverlichting
Kleur	Wit
Uitvoering	Acryl Aluminium gegoten
Afdekkingen	Acryl
Stralingshoek (°)	120
Voedingen	LED Driver
Nominale werkspanning AC (V)	220-240
Ingangsspanning AC (V)	220-240
Nominale uitgangsspanning AC (V)	25-42
Bedrijfsstroom mA (mA)	200

Technische Daten - Fortsetzung

Primaire stroom (A)	0,20
Lampvoet	LED
Lichtrendement (lm/W)	80
Vermogen (W)	8
Lichtkleur	Koudwit Warmwit Neutraalwit
Kleurtemperatuur (K)	4000 3000 5700
Kleurweergave-index (Ra)	≥80
Lichtstroom (lm)	640
Levensduur	36.000h / L70 / B50
Regelen lichtintensiteit	Neen
Beschermingsklasse	II
Beschermingsgraad	IP20
Inbouw diepte (mm)	50
Lichtmiddel inbegrepen	Inbegrepen
Diameter (mm)	120
ØxH (mm)	120x22
Boring voor inbouw (mm)	Ø 108
Uitsnijding (mm)	Ø 108

Maattekening: Sutil Round2 LED 8W 640lm 3K/4K/5,7K IP20 230V 120° wit

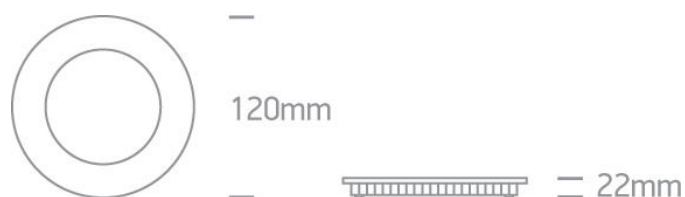

BEZEICHNUNG	BEST.NR.
Sutil Round2 LED 8W 640lm 3K/4K/5,7K IP20 230V 120° wit	LID17438
Recessed downlight, Compleet met driver	