


Datenblatt für Artikel: LIFS002009

LED Flexstrip 48 geel 11W/m 240lm/m 24VDC IP44 l=5m

LED Flexstrip voor gebruik binnen

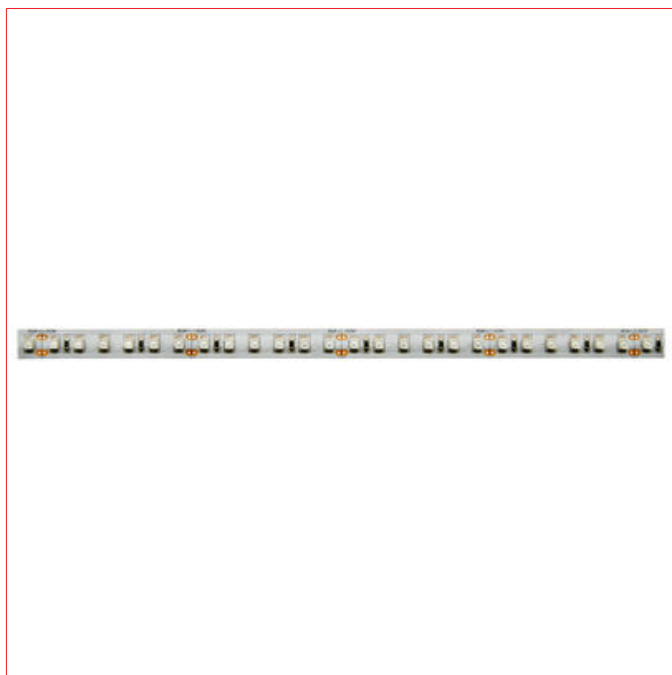


Technische Daten

Vermogen per meter (W/m)	9,70
Lichtstroom per meter (lm/m)	257
Lichtkleur	Geel
Regelen lichtintensiteit	Afhankelijk van driver Ja
Beschermingsklasse	III
Beschermingsgraad	IP44
Type verlichting	LED Strip
Lichtmiddel inbegrepen	Inbegrepen
Stralingshoek (°)	120
Nominale werkspanning DC (V)	24
Bevestiging	Wandaanbouw Plafondopbouw
Lengte (mm)	5000
Breedte (mm)	10,50
Hoogte (mm)	3

Technische Daten - Fortsetzung

Optionele toebehoren	LIAP006001;LIAP006003;LIAP006002;LIAP006004;LIAP006005;LIAP001003;LIAP001008;LIAP001001;LIAP001005;LIAP001002;LIAP001006;LIAP001004;LIAP001007;LIAP005003;LIAP005001;LIAP003002;LIAP003004;LIAP003003;LIAP003001;LIAP003005;LIAP003100;LIAP003200;LIAP004001;LIAP002006;LIAP002001;LIAP002003;LIAP002002;LIAP002004;LIAP002005
Noodzakelijke toebehoren	LILPV6024-;LINT244100;LINT924100;LILPV10024
LxBxH (mm)	5000x11x3
Type lamp	LED

Maattekening: LED Flexstrip 48 geel 11W/m 240lm/m 24VDC IP44 l=5m

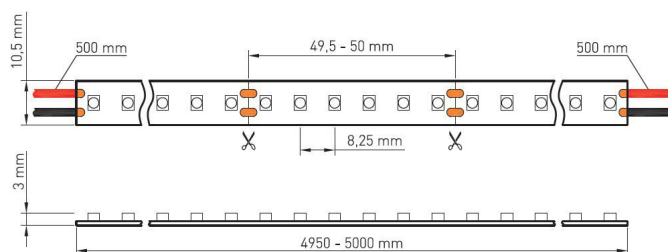

Artikeltabelle

BEZEICHNUNG	BEST.NR.
LED Flexstrip 48 geel 11W/m 240lm/m 24VDC IP44 l=5m	LIFS002009
LED Flexstrip voor gebruik binnen	
Noodzakelijke toebehoren	
LPV LED Voeding 60W 24VDC IP67 In=2,5A	LILPV6024
TD LED Voeding 100W 24VDC DALI/ drukknop MM IP20	LINT244100
TALEXdriver Tridonic, dimmable 24 V constant voltage LED driver	
FW LED Driver 100W/24V constant spanning MM IP20	LINT924100
LPV LED Voeding 100W 24VDC IP67 In=4,2A	LILPV10024
Optionele toebehoren	
Aluminiumprofiel CLF randloos LxBxH 2000x35x15mm	LIAP006001
Aluminiumprofiel CLI met rand 2000x45x35mm	LIAP006003
Aluminiumprofiel CLR randloos 2000x35x35mm	LIAP006002
Aluminiumprofiel CLU met rand 2000x45x17mm	LIAP006004
Aluminium wandprofiel CLW up/down 2000x35x90mm	LIAP006005
Aluminium hoekprofiel 45° LBE 2000x24x24mm	LIAP001003
Aluminium hoekprofiel 45° LBE 30/60 2000x19,3x21,6mm	LIAP001008
LBF Aluminiumprofiel randloos 2000x19x8mm	LIAP001001
Aluminiumprofiel LBI inbouw met rand LxBxD 2000x29x19mm Breedte Inbouwgleuf 19mm	LIAP001005
Aluminiumprofiel LBR randloos 2000x19x19mm	LIAP001002
Aluminiumprofiel LBS richtbaar 2000xØ29,9mm	LIAP001006
LBU Aluminiumprofiel met rand 2000x29x8mm	LIAP001004
Aluminium wandprofiel LBV up/side 2000x22x65mm	LIAP001007
Aluminiumprofiel MFI inbouwmontage 2000x55x55mm	LIAP005003
Aluminiumprofiel MFR pendelmontage 2000x60x45mm	LIAP005001
Aluminiumprofiel SLA randloos 2000x60x36mm	LIAP003002
Aluminiumprofiel SLH pendelmontage 2000x60x80mm	LIAP003004
Aluminiumprofiel SLI met rand 2000x70x36mm	LIAP003003
Aluminiumprofiel SLR pendelmontage 2000x60x50mm	LIAP003001
Aluminiumprofiel SLT met rand 2000x70x70mm	LIAP003005
Aluminium profiel wandinbouw SLW glad 2000x20,5x58,6mm	LIAP003100
Aluminium profiel wandinbouw SLW geribbeld 2000x20,5x58,6mm	LIAP003200
Aluminium hoekprofiel 45° SP 2000x25x25mm	LIAP004001
Aluminium hoekprofiel 45° TBE 2000x30x30mm	LIAP002006
Aluminiumprofiel TBF randloos 2000x25x12,5mm	LIAP002001

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Optionele toebehoren	
Aluminiumprofiel TBI met rand 2000x35x27mm	LIAP002003
Aluminiumprofiel TBR randloos 2000x25x25mm	LIAP002002
Aluminiumprofiel TBU met rand 2000x35x14,5mm	LIAP002004
Aluminium wandprofiel TBW up/down 2000x26,3x80mm	LIAP002005