


Datenblatt für Artikel: LIN1022739

KARO LED 18W, 3000K, 1620lm, Opal, PMMA, IP44



Light distribution curve




Technische Daten

Net height (mm)	105,00
Net diameter (mm)	360,00
Net weight (kg)	0,69
Mounting	surface mounting ceiling surface mounting wall
Colour	White
Material	PMMA sheetsteel
Manufacturer	O2-Schrack
Controller	LED driver
Operating voltage AC (V)	220-240
Light source	LED

Technische Daten - Fortsetzung

Lamp holder	LED Platine
Watt (W)	18
System efficiency (lm/W)	90
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	80
Luminous flux (lm)	1620
Live time	40000
Dimmable	no
Protection class	I
IP Rating	IP44
Illuminant incl.	yes
ØxH mm	360x105

Dimensioned drawing: KARO LED 18W, 3000K, 1620lm, Opal, PMMA, IP44

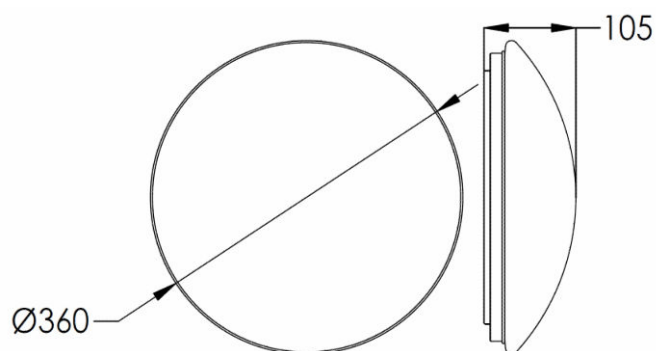

Artikeltabelle

BEZEICHNUNG	BEST.NR.
KARO LED 18W, 3000K, 1620lm, Opal, PMMA, IP44	LIN1022739
Optional Accessories	
Replacement cover for Karo II LED, 18W, Ø360mm	LIIM0027