

Multi-tone siren, 8 tones, 230-240VAC

Base required, only mountable as top modul, Productgroep Multi-toon, Bouwvorm Module, Bediening Dip schakelaars, Nominale spanning 230VAC- 240VACV



Technische Daten

Productgamma	MA 230V
Productgroep	Multi-toon
Nominale spanning (V)	230VAC- 240VAC
Bouwvorm	Module
Bediening	Dip schakelaars
Beschermingsgraad	IP66
Diameter (mm)	70
Invoeringen	Afhankelijk van basis
Noodzakelijke toebehoren	MAIB0001 --;
Optionele toebehoren	MAIB0002--;MAIR0001 --
Lens	Polycarbonaat, Fresnel lens
Bevestiging	Vrije oriëntatie
Levensduur	100000
Temperatuurbereik - Werking (°C)	-30°C tot +60
Nominale stroom (A)	0,04


Technische Daten - Fortsetzung

Geluidssterkte (dB)	100
Geluidsfrequentie (Hz)	500-2700
Maximum aantal modules	5
Inbouwdiameter (mm)	70
Inschakelduur (% ED)	100
Lekstroom	3mA [bruikbaar PLC]

Sound Chart

Dip Switch	Tone Stage	Ton Type	Frequency	Pictogram	Repeat Rate	Application	dB
	Tone 01	Continuous	2700Hz	—			100
	Tone 02	Continuous	1350Hz	—			100
	Ton 03	Intermittent	2700Hz	— — —	250ms on, 250ms off		100
	Ton 04	Intermittent	1350Hz	— — —	250ms on, 250ms off		100
	Ton 05	Sweeping	1200 - 500Hz		1Hz	Evacuation Germany DIN 33404-3	98
	Ton 06	Sweeping	500 - 1200Hz		rising in 3s, 0.5s off	Netherlands NEN 2575:2000	98
	Ton 07	Alternating	800 - 1000Hz		2Hz		94
	Ton 08	Pulsating	500 - 1500Hz		10Hz		94

Dimension

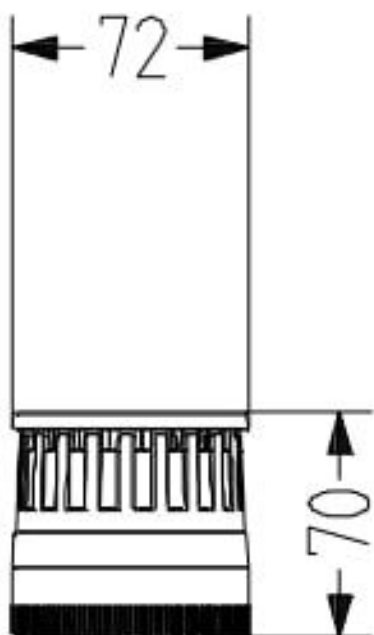

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Multi-tone siren, 8 tones, 230-240VAC Base required, only mountable as top modul, Productgroep Multi-toon, Bouwvorm Module, Bediening Dip schakelaars, Nominale spanning 230VAC- 240VACV	MAIA3200
Noodzakelijke toebehoren	
Standard Base for Signal Towers modular, Black 1 to max. 5 modules per base mountable, including end cap, usable for all modules (230-240VAC and 24V AC/DC), Productgroep Toebehoren, Bouwvorm Lege sokkel, Type klemmen Veerklemmen	MAIB0001
Optionele toebehoren	
Vertical Base for Signal Towers modular, Black 1 to max. 5 modules per base mountable, including end cap, usable for all modules (230-240VAC and 24V AC/DC), Productgroep Toebehoren, Bouwvorm Lege sokkel, Type klemmen Veerklemmen	MAIB0002
Tube base for Signal Towers, Alu-tube with plastic foot, 100mm 1 to max. 5 modules per base mountable, with plastic base 100mm, including end cap, usable for all modules (230-240VAC and 24V AC/DC), Productgroep Toebehoren, Bouwvorm Lege sokkel, Type klemmen Veerklemmen	MAIR0001