

Datenblatt für Artikel: MAIM4100F-

LED flashing light module, 24V AC/DC, yellow

Base required, Productgroep Knipperen, Bouwvorm Module, Bediening Constant, Nominale spanning 24VAC/DCV




Technische Daten

Productgamma	MA 24V
Productgroep	Knipperen
LED-Kleur	Geel
Nominale spanning (V)	24VAC/DC
Bouwvorm	Module
Bediening	Constant
Beschermingsgraad	IP66
Diameter (mm)	70
Invoeringen	Afhankelijk van basis
Optionele toebehoren	MAIB0001--;MAIB0002--;MAIR0001--;MAIA3100--
Type lamp	LED
Lens	Polycarbonaat, Fresnel lens
Bevestiging	Vrije oriëntatie

Technische Daten - Fortsetzung

Levensduur	100000
Temperatuursbereik - Werking (°C)	-30°C tot +60
Slagvastheid	IK08
Nominale stroom (A)	0,133
Knipper frequentie (Hz)	1,40
Maximum aantal modules	5
Inbouwdiameter (mm)	70
Inschakelduur (% ED)	100
Lekstroom	3mA [bruikbaar PLC]

Dimension

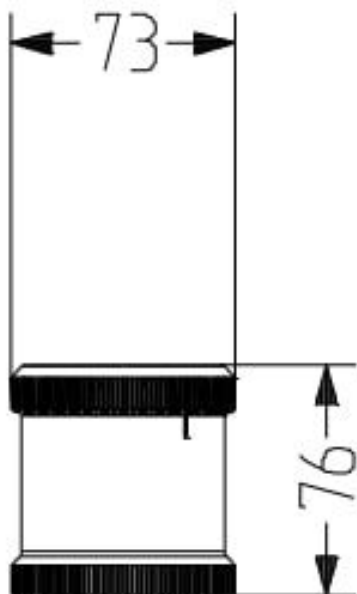

Artikeltabelle

BEZEICHNUNG	BEST.NR.
LED flashing light module, 24V AC/DC, yellow	
Base required, Productgroep Knipperen, Bouwvorm Module, Bediening Constant, Nominale spanning 24VAC/DCV	MAIM4100F
Optionele toebehoren	
Standard Base for Signal Towers modular, Black	
1 to max. 5 modules per base mountable, including end cap, usable for all modules (230-240VAC and 24V AC/DC),	MAIB0001
Productgroep Toebehoren, Bouwvorm Lege sokkel, Type klemmen Veerklemmen	
Vertical Base for Signal Towers modular, Black	
1 to max. 5 modules per base mountable, including end cap, usable for all modules (230-240VAC and 24V AC/DC),	MAIB0002
Productgroep Toebehoren, Bouwvorm Lege sokkel, Type klemmen Veerklemmen	
Tube base for Signal Towers, Alu-tube with plastic foot, 100mm	
1 to max. 5 modules per base mountable, with plastic base 100mm, including end cap, usable for all modules (230-240VAC and 24V AC/DC),	MAIR0001
Productgroep Toebehoren, Bouwvorm Lege sokkel, Type klemmen Veerklemmen	
Multi-tone siren, 8 tones, 24V AC/DC	
Base required, only mountable as top modul, Productgroep Multi-toon, Bouwvorm Module, Bediening Dip schakelaars, Nominale spanning 24VAC/DCV	MAIA3100