

Datenblatt für Artikel: MG059500--

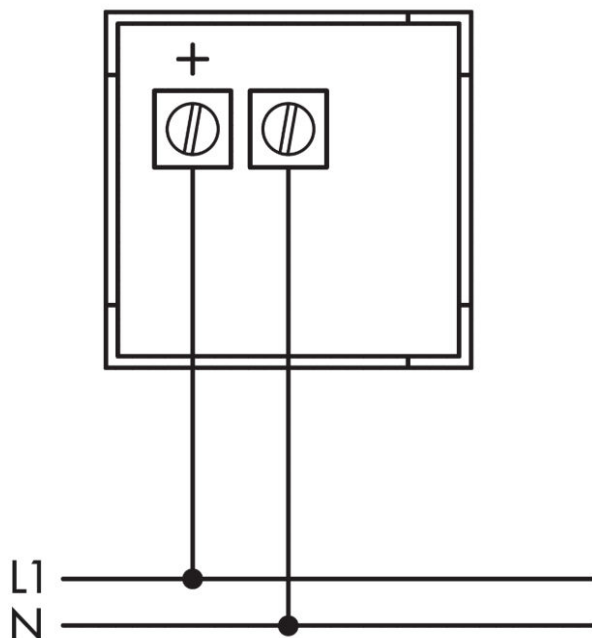
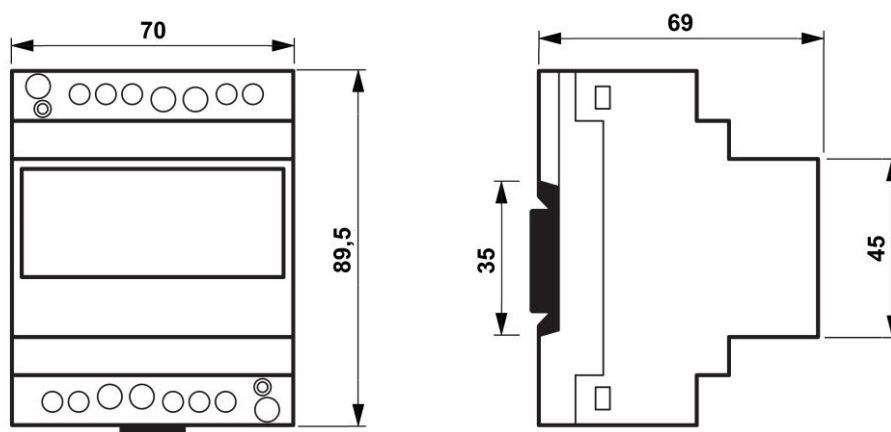
Mod. analoge voltmeter 500VAC direct

Uitvoering Modulair 45mm, Type toestel Voltmeter AC, Meetbereik 500V



Technische Daten

Uitvoering	Modulair 45mm
Meetbereik	500V
Aanduiding	Analoog
Normen	IEC 51 VDE 0410 EN 60051
Nauwkeurigheid	1,5%
Overbelasting (continu)	1,2x U_n
Overbelasting (korte duur)	2x U_n / 5s
Isolatie testspanning	2 kV R.M.S 50 Hz/1 min
Referentietemperatuur (°C)	+10 bis +30
Temperatuursbereik - Transport/ Opslag (°C)	-25°C tot +40
Stroomwarmteverliezen (W)	3,50
Bevestiging	Voor verticale inbouw
Belasting	3VA
Frequentiebereik	45Hz tot 65Hz
Trillingsweerstand	VDE 0410, 2,5g, $\pm 0,25$ mm, 50Hz
Schokweerstand	VDE 0410, 15G

Schema: Mod. analoge voltmeter 500VAC direct**Maattekening: Mod. analoge voltmeter 500VAC direct**

BEZEICHNUNG	BEST.NR.
Mod. analoge voltmeter 500VAC direct Uitvoering Modulair 45mm, Type toestel Voltmeter AC, Meetbereik 500V	MG059500