

Datenblatt für Artikel: NCCB2461E-


Low Power Supply 24V DC SECURO 24 PRO cab. M 6/20 wo. batt.

6 circuits, max. 120 luminaires (20 luminaires per circuit), max. current per circuit: 3A, max. total load current in emergency mode: 1h: 18A, 3h: 8A, total max. 10A for maintained luminaires, with single luminaire monitoring, cabinet M (for 2 x 45Ah): H534 x W475 x D186mm, without batteries




Technische Daten

Breedte (mm)	475,00
Hoogte (mm)	534,00
Diepte (mm)	186,00
Nettogewicht (kg)	14,00

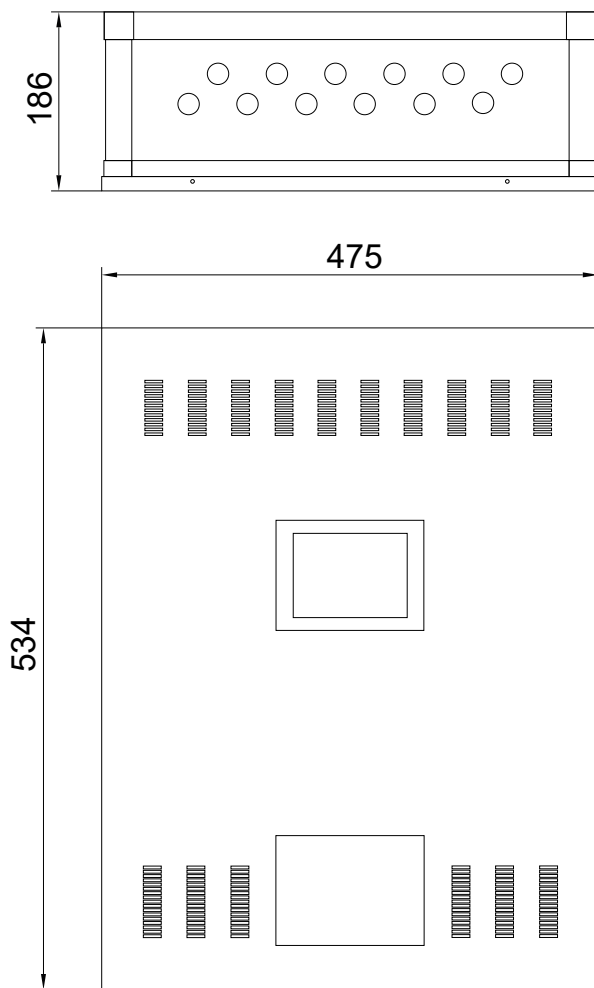Maattekening: Low Power Supply 24V DC SECURO 24 PRO cab. M 6/20 wo. batt.

Connections

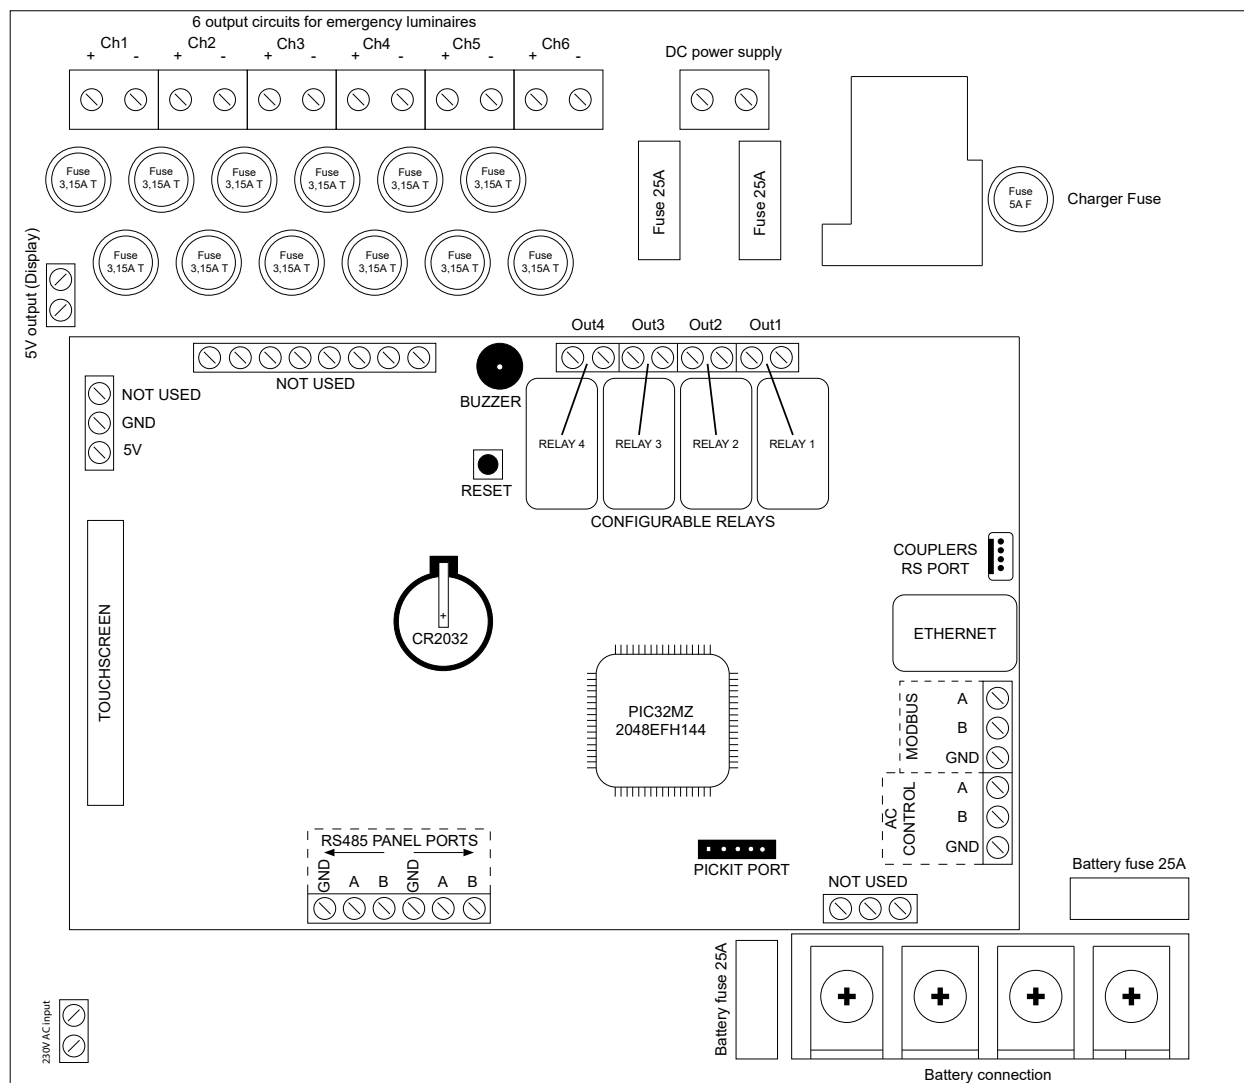

BEZEICHNUNG

BEST.NR.

Low Power Supply 24V DC SECURO 24 PRO cab. M 6/20 wo. batt.

6 circuits, max. 120 luminaires (20 luminaires per circuit), max. current per circuit: 3A, max. total load current in emergency mode:

NCCB2461E

1h: 18A, 3h: 8A, total max. 10A for maintained luminaires, with single luminaire monitoring, cabinet M (for 2 x 45Ah): H534 x

W475 x D186mm, without batteries

Optionele toebehoren

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Optionele toebehoren	
SECURO AC230 bus module and 1-phase mains monitor Including a potential-free switching input, for controlling up to three lighting groups, connection via RS 485 bus, compatible with SECURO 24 PRO, AC Control	NCCLAC230
Battery RPower OGiV longlife up to 12 years 12V/47Ah (C20)	NLBA045
Rescue sign luminaire SECURO 24 PRO R1 1W LED 24V DC White, universal mounting, with single lamp supervision - centrally switchable, viewing distance: 24m	NCR1MUW04C
Rescue sign luminaire SECURO 24 PRO R1 1W LED 24V DC White, universal mounting, with single lamp supervision - centrally switchable, viewing distance: 30m	NCR1XUW04C
Rescue sign luminaire SECURO 24 PRO R3 1W LED 24V DC White, ceiling surface mounting, with single lamp supervision - centrally switchable, viewing distance: 46m	NCR3XDW04C
Rescue sign luminaire SECURO 24 PRO C1 1W LED 24V DC White, wall surface mounting, including adhesive pictogram set, viewing distance: 17m, optional ceiling surface mounting with hanging sign (NCC1H - vd: 30m)	NCC1SUW04C
Rescue sign luminaire SECURO 24 PRO C2 1W LED 24V DC White, wall surface mounting, optional ceiling surface mounting with hanging sign (NCC2H), with single lamp supervision - centrally switchable, including adhesive pictogram set viewing, distance: 30m	NCC2XWW04C
Security luminaire SECURO 24 PRO S2 3W ERT-LED 24V DC White, ceiling surface mounting, with single lamp supervision - centrally switchable, incl. exchangeable lenses for illuminating escape routes or round areas, 314lm	NCS2LDW14C
Security luminaire SECURO 24 PRO S3 4W ERT-LED 24V DC White, ceiling recessed mounting, with single lamp supervision - centrally switchable, incl. exchangeable lenses for illuminating escape routes or round areas, 377lm	NCS3LEW14C
Security luminaire SECURO 24 PRO C1 6W HP-LED 24V DC White, ceiling surface mounting, with single lamp supervision - centrally switchable, 590lm	NCC1CDW24C
Security luminaire SECURO 24 PRO C2 6W HP-LED 24V DC White, ceiling surface mounting, with single lamp supervision - centrally switchable, 600lm	NCC2CDW24C