

Security luminaire SECURO 24 PRO S4 3W LED 24V DC

White, IP65, -25° up to +50°C, LED 3W, wall surface mounting, with single lamp supervision
- centrally switchable, 318lm




Technische Daten

Breedte (mm)	192,00
Hoogte (mm)	220,00
Diepte (mm)	65,00
Nettogewicht (kg)	1,12
Type verlichting	Noodverlichting
Type batterijvoeding	Centrale batterij
Type toestel	SECURO 24 PRO
Productgroep	Verlichting metaal
Design	S4
Kleur	Wit
Lichtmiddel	HP-LED (3W)
Lumen	314
Nominale stroom (mA) (mA)	180

Technische Daten - Fortsetzung

Nominale spanning (V)	24VDC
Beschermingsgraad	IP65
Bevestiging	Plafondmontage Plafondinbouw mogelijk
Omgevingstemperatuur min. (°C)	-25
Omgevingstemperatuur max. (°C)	50
AA Klasse E 8101	AA4
Leverancier	Schrack

Maattekening: Security luminaire SECURO 24 PRO S4 3W LED 24V DC

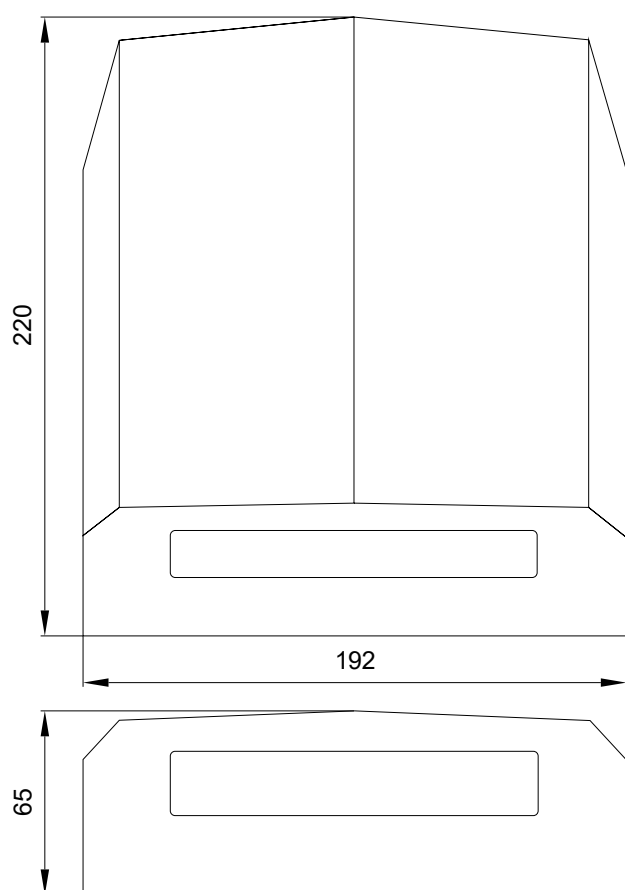

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Security luminaire SECURO 24 PRO S4 3W LED 24V DC White, IP65, -25° up to +50°C, LED 3W, wall surface mounting, with single lamp supervision - centrally switchable, 318lm	NCS4FWW14C
Optionele toebehoren	
Low Power Supply 24V DC SECURO 24 PRO cab. M 6/20 w. batt. 6 circuits, max. 120 luminaires (20 luminaires per circuit), max. current per circuit: 3A, max. total load current in emergency mode: 1h: 18A, 3h: 8A, total max. 10A for maintained luminaires, with single luminaire monitoring, cabinet M (for 2 x 45Ah): H534 x W475 x D186mm, incl. 2 pcs 45Ah OGiV batteries (NLBA045)	NCCB2461ES
Low Power Supply 24V DC SECURO 24 PRO cab. L 6/20 w. batt. 6 circuits, max. 120 luminaires (20 luminaires per circuit), max. current per circuit: 3A, max. total load current in emergency mode: 1h: 18A, 3h: 18A, total max. 10A for maintained luminaires, with single luminaire monitoring, cabinet L (for 4 x 45Ah): H754 x W475 x D186mm, incl. 4 pcs 45Ah OGiV batteries (NLBA045)	NCCB2463ES