

Explosion proof emerg.luminaire EXIT zone 1/21 LED 230V AC/DC

transparent cover without pictogram, for CPS and LPS, wall surface mounting, IP66, 106lm




Technische Daten

Netto lengte (mm)	356,00
Hoogte (mm)	175,00
Diepte (mm)	76,00
Nettogewicht (kg)	2,00
Type verlichting	Noodverlichting
Type batterijvoeding	Centrale batterij
Type toestel	Standaard
Productgroep	Noodverlichting Ex
Design	EXIT
Kleur	Grijs
Lichtmiddel	LED (3W)
Lumen	106
Nominale spanning (V)	110VAC- 277VAC/ 110VDC- 250VDC
Beschermingsgraad	IP66
Bevestiging	Wandbevestiging
Omgevingstemperatuur min. (°C)	-20
Omgevingstemperatuur max. (°C)	40
AA Klasse E 8101	AA4
Leverancier	Cooper Crouse-Hinds

Dimensions (mm)

NL9...

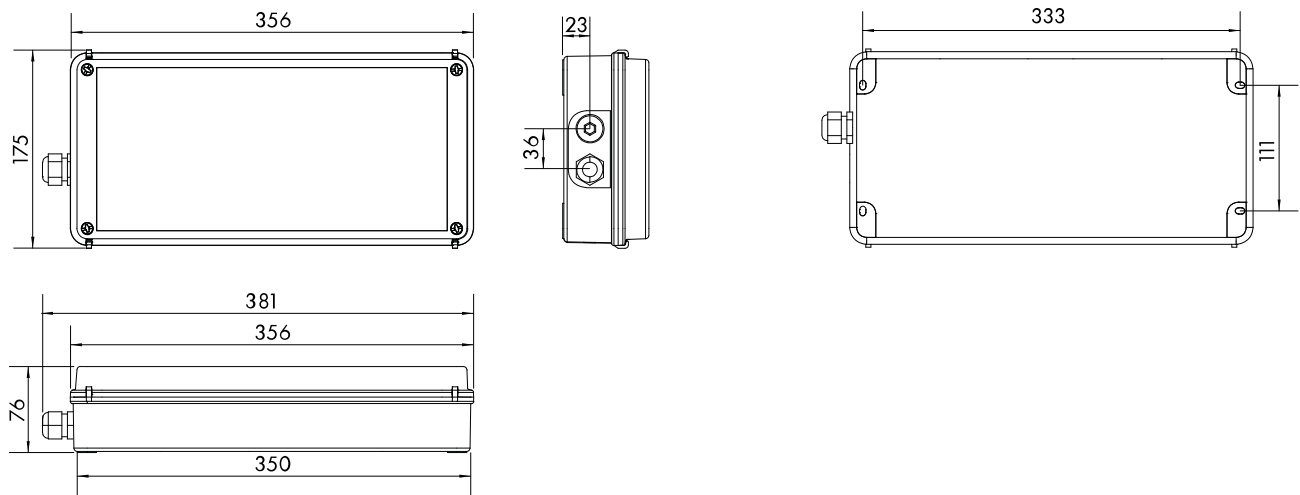

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	2,38	6,37	6,19	5,98	2,38
2,50	2,41	6,9	6,67	6,51	2,41
3,00	2,26	6,98	6,92	6,86	2,43
3,50	2,19	6,89	6,87	7,04	2,27
4,00	2,13	6,48	6,75	7,03	2,04

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Explosion proof emerg.luminaire EXIT zone1/21 LED 230V AC/DC transparent cover without pictogram, for CPS and LPS, wall surface mounting, IP66, 106lm	NL91000004
Optionele toebehoren	
Light manager for CPS including mixed mode 4-200VA	NLMU06
Box IP65 with mounting plate + MU06 f. luminaires 4-200VA 176x125x82 mm (LxHxD)	NLMU06BOX