

EX-protected emerg.luminaire EXIT 2 zone2/22 LED 230V AC/DC

transparent cover without pictogram, for CPS and LPS, wall surface mounting, IP66, 106lm




Technische Daten

Netto lengte (mm)	356,00
Hoogte (mm)	175,00
Diepte (mm)	76,00
Nettogewicht (kg)	2,00
Type verlichting	Noodverlichting
Type batterijvoeding	Centrale batterij
Type toestel	Standaard
Type toestel	Noodverlichting Ex
Design	EXIT
Afwerking	Grijs
Lichtmiddel	LED (3W)
Lumen	106
Nominale spanning (V)	110VAC- 277VAC/ 110VDC- 250VDC
Beschermingsgraad	IP66
Bevestiging	Wandaanbouw
Omgevingstemperatuur min. (°C)	-20
Omgevingstemperatuur max. (°C)	40
AA Klasse E 8101	AA4
Leverancier	Cooper Crouse-Hinds

Dimensions (mm)

NL9...

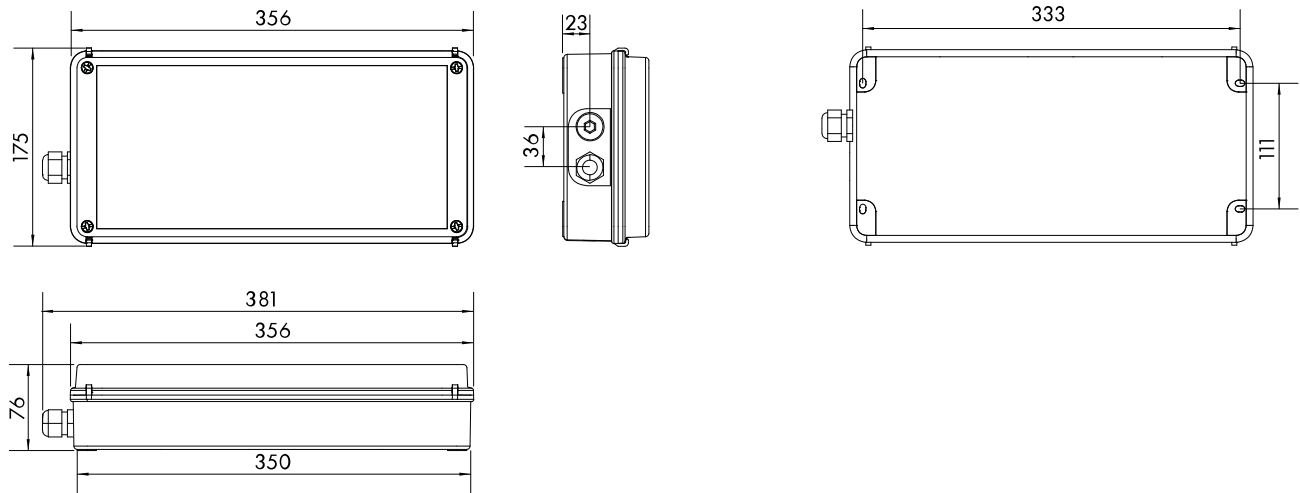

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	2,38	6,37	6,19	5,98	2,38
2,50	2,41	6,9	6,67	6,51	2,41
3,00	2,26	6,98	6,92	6,86	2,43
3,50	2,19	6,89	6,87	7,04	2,27
4,00	2,13	6,48	6,75	7,03	2,04

Artikeltabelle

BEZEICHNUNG	BEST.NR.
EX-protected emerg.luminaire EXIT 2 zone2/22 LED 230V AC/DC	NL93000004
transparent cover without pictogram, for CPS and LPS, wall surface mounting, IP66, 106lm	
Optionele toebehoren	
Manager noodverlichting bewaking en gemengde werking 4-200VA	NLMU05
Manager noodverlichting in behuizing	NLMU05BOX
176x125x82 mm (LxHxD)	