


Emergency luminaire Al stainless steel look, wall recessed

Centrally switchable, with single lamp supervision, Viewing distance: 15m, 230V AC/DC, LED, recessed mounting with adapter frame in switch box Ø68mm

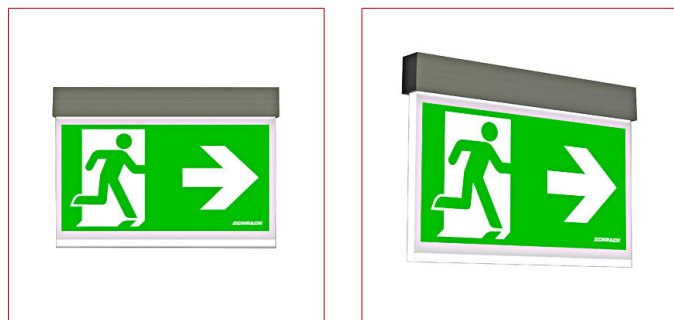

Technische Daten


Netto lengte (mm)	167,00
Breedte (mm)	57,00
Hoogte (mm)	118,00
Nettogewicht (kg)	0,80
Type verlichting	Noodverlichting
Type batterijvoeding	Centrale batterij
Type toestel	Met bewaking en centrale bediening
Productgroep	Ring licht
Design	Al
Kleur	RVS afwerking
Pictogrammen	Set pictogrammen (pijl links, rechts, onder, boven en folie wit) conform ISO 7010
Detectie afstand (m)	15
Lichtmiddel	LED (1.5W)
Nominale spanning (V)	230VAC 50Hz ±20%; 230VDC ±20%
Continu vermogen (W)	2,25
Standby vermogen (W)	0,70
Maximaal vermogen (W)	2,25
Beschermingsgraad	IP40
Slagvastheid	≥ IK03
Bevestiging	Wandinbouw

Technische Daten - Fortsetzung

Omgevingstemperatuur min. (°C)	-5
Omgevingstemperatuur max. (°C)	40
AA Klasse E 8101	AA4
Leverancier	Schrack

Dimensions (mm)

NLAIR.09EL

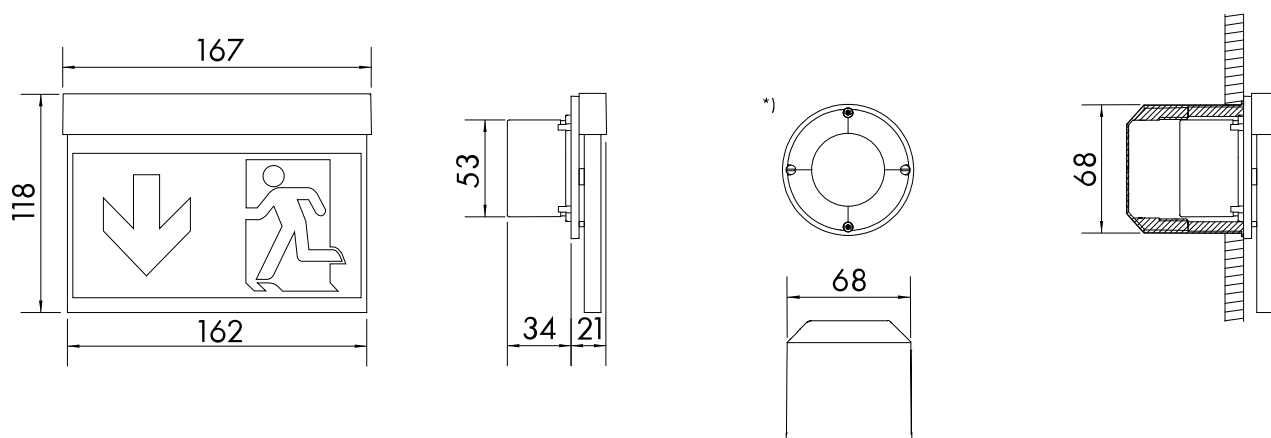

BEZEICHNUNG	BEST.NR.
Emergency luminaire Al stainless steel look, wall recessed	
Centrally switchable, with single lamp supervision, Viewing distance: 15m, 230V AC/DC, LED, recessed mounting with adapter frame in switch box Ø68mm	NLAIRE09EL